

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/004478 A1


- (51) International Patent Classification⁷: **H04N 5/92**
- (21) International Application Number:
PCT/JP2004/009873
- (22) International Filing Date: 5 July 2004 (05.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/485,207 3 July 2003 (03.07.2003) US
- (71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]: 1006 Oazakadoma, Kadoma-shi, Osaka 5718501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): McCrossan, Joseph. OKADA, Tomoyuki. MOCHINAGA, Kazuhiro.
- (74) Agent: NAKAJIMA, Shiro; 6F, Yodogawa 5-Bankan, 2-1, Toyosaki 3-chome, Kita-ku, Osaka-shi, Osaka 5310072 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: RECORDING MEDIUM, REPRODUCTION APPARATUS, RECORDING METHOD, INTEGRATED CIRCUIT, PROGRAM, AND REPRODUCTION METHOD

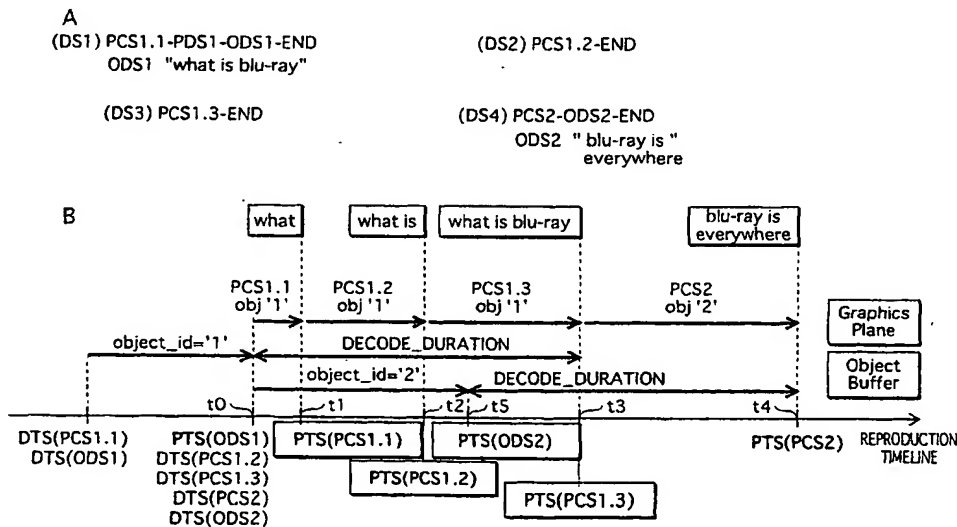

(57) Abstract: AVClip recorded in BD-ROM is obtained by multiplexing a graphics stream and a video stream. The graphics stream is a PES packet sequence that includes 1) PES packets storing graphics data (ODS) and 2) PES packets storing control information (PCS). In each ODS, values of DTS and PTS indicate a timing of decoding start for corresponding graphics data, and a timing of decoding end for corresponding graphics data, respectively. In each PCS, a value of PTS indicates a display timing of corresponding decoded graphics data combined with the video stream.

WO 2005/004478 A1

in a subtitle application. This standard establishes synchronization between a moving picture and graphics, in which graphics is displayed when corresponding images in a video stream are displayed.

5 When subtitle application is to be provided for BD-ROM, there is a need for further enhancing the resolution level of the graphics. To be more specific, the resolution level is desired to be improved to the level of 1920*1080. However, realization of such a high definition incurs an enormous amount
10 of decoding load at reproduction.

 The ETSI EN 300 743 standard defines reproduction control for performing decoding at the time designated by the PTS, and for displaying it straight away. When this is applied, an enormous amount of decoding load will be concentrated in
15 the reproduction apparatus at points immediately before display. Such concentration of load forces the hardware/software competence of the reproduction apparatus to be high, so as to realize graphics display. If such a condition becomes essential for reproduction apparatuses,
20 production cost for reproduction apparatuses will rise remarkably, which will prevent such reproduction apparatuses from being commonly used.

Disclosure of the invention

25 The object of the present invention is to provide a

recording medium that realizes high definition level of graphics display, as well as avoiding rise in production cost.

So as to achieve the above-described object, the present invention provides a recording medium storing therein a digital stream that is obtained by multiplexing a graphics stream and a video stream, the graphics stream being a packet sequence that includes a data packet storing graphics data and a control packet storing control information, wherein

the data packet has a time stamp whose value indicates a decoding time of the graphics data, and

the control packet has a time stamp whose value indicates a time at which the graphics data, after being decoded, is displayed combined with the video stream.

The period in which graphics is decoded is indicated by the time stamp of the packet storing the graphics, and display of the graphics is defined by the value of the time stamp assigned to corresponding control information. Therefore in the present invention, "state of already decoded but not yet displayed", in other words, a state in which decompressed graphics is buffered, is defined on the reproduction timeline.

By defining such a buffering period, it becomes possible to avoid concentration of an enormous amount of decoding load to one point. In addition, if the use of the hardware resource for decoding simultaneously contends other processing,

buffering period can be provided so as to relocate the graphics decoding period, thereby avoiding such contention.

Here, if this buffering concept is introduced so as to achieve the aforementioned object, technicians pursuing the development of such a reproduction apparatus will be at a loss about the extent of the memory to be mounted, so as to guarantee normal operation. Meanwhile, technicians who produce subtitle application will also be anxious about whether the subtitle application of their own can be assuredly reproduced by the reproduction apparatus. All these are because the memory occupancy for this buffering will change chronologically, in the course of reproduction on the reproduction timeline. If the chronological change in memory occupancy stays unknown, the anxieties of these technicians will not be wiped away.

So as to solve this problem, it is desirable to have a construction in which the control information includes type information that indicates a memory management start, the time stamp of the control packet is a presentation time stamp, and the control packet further includes a decode time stamp whose value indicates a point of a reproduction timeline of the digital stream, which corresponds to the memory management start, and a time at which the control information is read to a memory.

According to this construction, a memory management

time lag of notification, there will be a case where updating of graphics cannot be synchronized with the display rate of the moving picture.

So as to prevent such a case from occurring, it is
5 desirable to have a construction in which the value of the presentation time stamp is obtained by adding a predetermined value to the value of the decode time stamp, where the predetermined value is based on: a longer one of a period required for clearing of a screen, and a period required for
10 decoding of the graphics data; and a period required for writing of the graphics data to the screen.

The presentation time stamp of a packet storing graphics indicates a decoding ending time, and the presentation time stamp of a packet storing control information indicates a
15 time obtained by adding a predetermined period to the decoding ending time. Therefore only by referring to the presentation time stamps, the controller can perform updating at an adequate timing without receiving from the processor any decoding-completion notification of graphics data. If such
20 update is performed, it becomes possible to assure update synchronized with the display rate of the moving picture, regardless of the manner of implementation in the reproduction apparatus.

Since closer processor-controller connection is
25 realized regardless of the manner of processor-controller

implementation in the reproduction apparatus, it becomes possible to maintain a degree of flexibility in the apparatus designing, as well as facilitating manufacturing apparatuses at low cost.

5

Brief Description of the Drawings

FIG.1 illustrates an example of use of a recording medium according to the present invention.

FIG.2 illustrates a structure of a BD-ROM.

10 FIG.3 is a diagram schematically illustrating a structure of an AVClip.

FIG.4A illustrates a structure of a presentation graphics stream.

15 FIG.4B illustrates a PES packet obtained after functional segments are converted.

FIG.5 illustrates a logical structure that is made of various kinds of functional segments.

FIG.6 illustrates a relation between a display position of a subtitle and an Epoch.

20 FIG.7A illustrates syntax to define a Graphics Object in an Object Definition Segment (ODS).

FIG.7B illustrates syntax of a Palette Definition Segment (PDS).

25 FIG.8A illustrates syntax of a Window Definition Segment (WDS).

FIG.8B illustrates syntax of a Presentation Composition Segment (PCS).

FIG.9 illustrates an example of a description of a

Display Set for subtitling.

FIG.10 illustrates an example of a description of the WDS and PCS in a DS1.

FIG.11 illustrates an example of a description of the
5 PCS in a DS2.

FIG.12 illustrates an example of a description of the PCS in a DS3.

FIG.13 is an example of a description of a Display Set when Cut-In/Out is performed, illustrating along a timeline.

10 FIG.14 is an example of a description of a Display Set when Fade-In/Out is performed, illustrating along a timeline.

FIG.15 is an example of a description of a Display Set when Scrolling is performed, illustrating along a timeline.

FIG.16 is an example of a description of a Display Set
15 when Wipe-In/Out is performed, illustrating along a timeline.

FIG.17 is a diagram comparing two cases: a window has four Graphics Objects, and a window has two Graphics Objects.

FIG.18 illustrates an example of an algorithm for calculating a decode duration.

20 FIG.19 is a flowchart of the algorithm of FIG.18.

FIGs.20A and B are flowcharts of the algorithm of FIG.18.

FIG.21A illustrates a case in which each window has an Object Definition Segment.

FIGs.21B and C are timing charts showing orders among
25 numerals referred to in FIG.18.

FIG.22A illustrates a case in which each window has two Object Definition Segments.

FIGs.22B and C are timing charts showing orders among numerals referred to in FIG.18.

FIG.23A describes a case in which each of two Windows includes an ODS.

FIG.23B illustrates a case in which a decode period (2) is longer than a total of a clearing period (1) and a write
5 period (31).

FIG.23C illustrates a case in which a total of the clearing period (1) and the write period (31) is longer than the decode period (2).

FIG.24 illustrates chronological transition of update
10 described in an example in the present specification.

FIG.25A illustrates four Display Sets that are described so as to perform the above explained update.

FIG.25B is a timing chart showing settings of DTS and PTS of functional segments included in the four Display Sets.

15 FIG.26 illustrates an internal structure of a reproduction apparatus according to the present invention.

FIG.27 illustrates sizes of write rates Rx, Rc, and Rd, Graphics Plane 8, Coded Data Buffer 13, Object Buffer 15, and Composition Buffer 16.

20 FIG.28 is a timing chart illustrating a pipeline processing by the reproduction apparatus.

FIG.29 illustrates a timing chart in a pipeline processing of a case in which decoding of the ODS ends before clearing of the Graphics Plane is completed.

25 FIG.30 is a timing chart showing chronological transition of the amount of accumulation at the Graphics Plane 8.

FIG.31 is a flowchart illustrating a process of a loading

operation of a functional segment.

FIG.32 shows an example of multiplexing.

FIG.33 illustrates a manner in which a DS10 is loaded to the Coded Data Buffer 13 of the reproduction apparatus.

5 FIG.34 illustrates a case where a normal reproduction is performed.

FIG.35 illustrates loading of a DS1, the DS10, and a DS20 in a normal reproduction as performed in FIG.34.

10 FIG.36 is a flowchart showing a process performed by the Graphics controller 17.

FIG.37 is a flowchart showing a process performed by the Graphics Controller 17.

FIG.38 a flowchart showing a process performed by the Graphics Controller 17.

15 FIG.39 illustrates a pipeline process of the reproduction apparatus based on the PTS of the PDS.

FIG.40 is a diagram describes a significance of the END in the pipeline process of the reproduction apparatus.

20 FIG.41 is a diagram schematically illustrates a structure of AVClip according to the second embodiment.

FIG.42A and FIG.42B are diagrams about an interactive screen according to the second embodiment.

FIG.43 illustrates a data structure of Interactive Composition Segment.

25 FIG.44 shows a relationship between an ODS included in

a DS_n, and ICS.

FIG.45 shows a screen composition at the display timing of arbitrary picture data "pt1".

FIG.46 shows an example of setting for button information in ICS.

FIG.47 illustrates a state transition of button A - button D.

FIG.48 illustrates images of ODS₁₁, 21, 31, and 41, as one example.

FIG.49 illustrates images of ODS₁₁-19 for the button A, as one example.

FIG.50 illustrates the button-state groups and the order of ODS in Display Set.

FIG.51 illustrates a state transition of an interactive screen in which the button-state groups of FIG.50 are disposed.

FIG.52 illustrates the order of ODS in Display Set.

FIG.53 shows difference in arrangement of ODS in S-ODSs, between a case of default_selected_button_number=0, and a case of default_selected_button_number=button B.

FIGs.54A and 54B shows a value of $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$, in a case when N-ODSs include plural ODS constituting the buttons A-D, and S-ODSs include plural ODS constituting the buttons A-D.

FIG.55 shows a timing of synchronized display by means of ICS.

FIG.56 shows how DTS and PTS are set in a case where an initial display of an interactive screen is constituted by plural ODSs, and where the default_selected_button is valid.

5 FIG.57 shows how DTS and PTS are set in a case where an initial display of an interactive screen is constituted by plural ODSs, and where the default_selected_button is invalid.

FIG.58 illustrates the content of an Object Buffer 15
10 in comparison with a Graphics Plane 8.

FIG.59 illustrates an operation performed by the Graphics controller 17 at the initial display time.

FIG.60 illustrates an operation performed by the Graphics controller 17 when the interactive screen update
15 is performed according to 1stUserAction(MoveRight).

FIG.61 illustrates an operation performed by the Graphics controller 17 when the interactive screen update is performed according to the 1stUserAction(MoveDown).

FIG.62 illustrates an operation performed by the
20 Graphics controller 17 when the interactive screen update is performed according to the 1stUserAction(Activated).

FIG.63 is a timing chart illustrating a pipeline processing performed by the reproduction apparatus.

FIG.64 is a timing chart illustrating a pipeline
25 processing by the reproduction apparatus in a case where the

default selected button changes dynamically.

FIG.65 is a timing chart illustrating chronological transitions in occupancy of the Graphics Plane 8, the Object Buffer 15, the Coded Data buffer 13, and the Composition buffer 16.

FIG.66 is a flowchart showing a process of loading operation of Segment.

FIG.67 shows an example of multiplexing.

FIG.68 illustrates a manner in which a DS10 is loaded to the Coded Data Buffer 13 of the reproduction apparatus.

FIG.69 illustrates a case where a normal reproduction is performed.

FIG.70 illustrates loading of a DS1, the DS10, and a DS20 in a normal reproduction as performed in FIG.69.

FIG.71 is a flowchart illustrating a main routine of the processing performed by the Graphics controller 17.

FIG.72 is a flowchart illustrating a processing for realizing sync control that uses time stamp.

FIG.73 is a flowchart showing a process of an operation to write to the Graphics Plane 8.

FIG.74 is a flowchart illustrating an automatic activation processing for the default selected button.

FIG.75 is a flowchart showing an animation display process.

FIG.76 is a flowchart illustrating a process of UO

operation.

FIG.77 is a flowchart illustrating a process of current button changing operation.

FIG.78 is a flowchart illustrating a process of numerical value inputting operation.

FIG.79 illustrates a method of manufacturing a BD-ROM that records the PCS explained in the first embodiment.

FIG.80 illustrates a method of manufacturing a BD-ROM that records the PCS explained in the second embodiment.

10

Best Mode for Carrying Out the Invention

(First Embodiment)

A First Embodiment of a recording medium according to the present invention is explained below.

FIG.1 illustrates an example of use of the recording medium. In the drawing, BD-ROM 100 is the recording medium according to the present invention. The BD-ROM 100 is used for providing data of movie works to a Home Theatre System structured by a reproduction apparatus 200, a television 300, and a remote controller 400.

The recording medium according to the present invention is manufactured by an improvement in an application layer of a BD-ROM. FIG.2 illustrates a structure of the BD-ROM.

In the drawing, the BD-ROM is shown at a bottom of the drawing, and a track on the BD-ROM is shown above the BD-ROM. The track is actually in a spiral shape on the disk, but shown

in a line in the drawing. The track includes a lead-in area, a volume area, and a lead-out area. The volume area in this drawing has a physical layer, a file system layer, and an application layer. At a top of the drawing, an application
5 format of the BD-ROM is illustrated using a directory structure. As illustrated in the drawing, the BD-ROM has a directory BDMV under the root directory, and the BDMV directory contains a file for storing an AVClip with an extension M2TS (XXX.M2TS), a file for storing administrative info for the AVClip with
10 an extension CLPI (XXX.CLPI), and a file for defining a logical PlayList (PL) for the AVClip with an extension MPLS (YYY.MPLS). By forming the above application format, it is possible to manufacture the recording medium according to the present invention. In a case in which there are more than one file
15 for each kind, it is preferable to provide three directories named STREAM, CLIPINF, and PLAYLIST under the BDMV to store the files with the same extension in one directory. Specifically, it is desirable to store the files with the extension M2TS in the STREAM, the files with the extension
20 CLPI in the CLIPINF, and the files with the extension MPLS in the PLAYLIST.

An explanation about the AVClip (XXX.M2TS) in the above application format is given below.

The AVClip (XXX.M2TS) is a digital stream in MPEG-TS
25 format (TS is Transport Stream) obtained by multiplexing a video stream, at least one audio stream, and a presentation graphics stream. The video stream represents pictures of the film, the audio stream represents sound of the film, and the presentation graphics stream represents subtitles of the film.

FIG.3 is a diagram schematically illustrating a structure of the AVClip.

The AVClip (XXX.M2TS) is structured in a following manner. The video stream made of plural video frames (picture pj1, pj2, and pj3), and the audio stream made of plural audio frames (top row of the drawing) are respectively converted into a line of PES packets (second row of the drawing), and then into a line of TS packets (third row of the drawing). The presentation graphics stream (bottom row of the drawing) is converted into a line of PES packets (second to bottom row of the drawing), and then into a line of TS packets (third to bottom row of the drawing). The three lines of TS packets are multiplexed, and thus the AVClip (XXX.M2TS) is constituted.

In the drawing, only one presentation graphics stream is multiplexed. However, in a case in which the BD-ROM is compatible to plural languages, a presentation graphics stream for each language is multiplexed to constitute the AVClip. The AVClip constituted in the above manner is divided into more than one extent, like ordinary computer files, and stored in areas in the BD-ROM.

Next, the presentation graphics stream is explained. FIG.4A illustrates a structure of the presentation graphics stream. A top row indicates the TS packet line to be multiplexed to the AVClip. A second to the top row indicates the PES packet line that constitutes a graphics stream. The PES packet line is structured by retrieving payloads out of TS packets having a predetermined PID, and connecting the retrieved payloads.

A third to the top row indicates the structure of the graphics stream. The graphics stream is made of functional segments named a Presentation Composition Segment (PCS), a Window Definition Segment (WDS), a Palette Definition Segment (PDS), an Object Definition Segment (ODS), and an END of Display Set Segment (END). Among the above functional segments, the PCS is called a screen composition segment, and the WDS, PDS, ODS, and END are called definition segments. The PES packet and each of the functional segments correspond one to one, or one to plurality. In other words, one functional segment is either recorded in the BD-ROM after converted into one PES packet, or after divided into fragments and converted into more than one PES packet.

FIG. 4B illustrates the PES packet obtained by converting the functional segments. As shown in the drawing, the PES packet is made of a packet header and the payload, and the payload is a substantial body of a functional segment. The packet header includes a DTS and a PTS corresponding to the functional segment. The DTS and PTS included in the packet header are hereinafter referred to as the DTS and PTS of the functional segment.

The above described various kind of functional segments constitute a logical structure as illustrated in FIG. 5. FIG. 5 illustrates the logical structure that is made of the various kinds of functional segments. In the drawing, a top row illustrates Epochs, a middle row illustrates Display Sets (DS), and a bottom row illustrates the functional segments.

Each of the DS shown in the middle row is a group of functional segments that compose graphics for one screen,

among all of the plural functional segments that constitute the graphics stream. Broken lines in the drawing indicate the DS to which the functional segments in the bottom row belong, and show that a series of the functional segments
5 of the PCS, WDS, PDS, ODS, and END constitute one DS. The reproduction apparatus is able to generate graphics for one screen by reading the functional segments that constitute the DS.

The Epochs shown in the top row indicate time periods,
10 and memory management is consecutive timewise along a timeline of the AVClip reproduction in one Epoch. One Epoch also represents a group of data that is assigned to the same period of time. The memory referred to here are the Graphics Plane that stores the graphics for one screen, and an Object Buffer
15 that stores decompressed graphics data. The consecutiveness of the memory management means a flash of the Graphics Plane or of the Object Buffer does not occur in the Epoch, and erasing and rendering of the graphics are only performed in a predetermined rectangular area on the Graphics Plane (the
20 flash here indicates clearing of all contents of the stored data in a plane or a buffer). A size and a position of the rectangular area are fixed during one Epoch. As long as the erasing and rendering of the graphics are only performed in the predetermined rectangular area on the Graphics Plane,
25 a sync reproduction between the picture and the graphics is guaranteed. In other words, the Epoch is a unit in the reproducing timeline, and in this unit, the picture and the graphics are guaranteed to be reproduced synchronously. When moving the area, in which the graphics are erased and rendered,

to a different position, it is necessary to define a point on the timeline to move the area, and a period after the point becomes a new Epoch. The sync reproduction is not guaranteed at a boarder between two Epochs.

5 In viewing an actual film, one Epoch is a time period in which subtitles are displayed in the same rectangular area on the screen. FIG.6 illustrates a relation between the position of the subtitles and the Epochs. In an example illustrated by the drawing, the positions at which the five
10 subtitles "Actually...", "I was hiding", "my feelings.", "I always", and "loved you." are shown move according to the picture in the film. Specifically, the subtitles "Actually...", "I was hiding", and "my feelings." appear at the bottom of the screen, while the subtitles "I always" and
15 "loved you." are shown at the top of the screen. The position of the rectangular area moves in order that the subtitles are out of the way of pictures when viewing the screen, considering visibility of the film. A time period during which the subtitles appear at the bottom is an Epoch 1, and a
20 subsequent time period during which the subtitles appear at the top is an Epoch 2. The Epochs 1 and 2 each have a different area in which the subtitles are rendered. The area in the Epoch 1 is a Window 1 positioned at the bottom of the screen, and the area in the Epoch 2 is a Window 2 positioned at the
25 top of the screen. The memory management is consecutive in each of the Epochs 1 and 2, and accordingly, rendering of the subtitles in the Windows 1 and 2 is synchronous with the pictures.

Next, details about the Display Set (DS) are described.

Broken lines hkl1 and hkl2 in FIG.5 indicate which functional segment at the middle row belongs to which Epoch. A series of DS "Epoch Start", "Acquisition Point", and "Normal Case" constitute the Epoch at the top row. The "Epoch Start",
5 "Acquisition Point", "Normal Case", and "Epoch Continue" are types of the DS, and an order between the "Acquisition Point" and "Normal Case" does not matter and either of them may come first.

The Epoch Start is a DS that has a display effect of
10 "new display", which indicates a start of a new Epoch. Because of this, the Epoch Start contains all functional segments needed to display a new composition of the screen. The Epoch Start is provided at a position which is a target of a skip operation of the AVClip, such as a chapter in a film.

15 The Acquisition Point is a DS that has a display effect of "display refresh", and is identical in content used for rendering graphics with the Epoch Start which is a preceding DS. The Acquisition Point is not provided at a starting point of the Epoch, but contains all functional segments needed
20 to display the new composition of the screen. Therefore, it is possible to display the graphics without fail when a skip operation to the Acquisition Point is performed. Accordingly, with the Acquisition Point, it is possible to compose a screen in the middle of the Epoch.

25 The Acquisition Point is provided at a position that could be a target for the skip operation. An example of such a position is a position that could be specified when performing a time search. The time search is an operation in response to a user's input of a time to start reproducing from a

reproducing point corresponding to the time specified by the user. The time is specified roughly, by 10 minutes or by 10 seconds for example, and accordingly, points at which the reproduction starts are provided at a 10 minute interval, or a 10 second interval, for example. By providing the Acquisition Point at the points at which the reproduction may start, it is possible to perform reproduction smoothly after the time search.

The Normal Case is a DS that has a display effect of "display update", and contains only elements that are different from the preceding composition of the screen. Specifically, when subtitles in a DSv is the same as subtitles in a DSu but the screen is displayed differently in the DSv and DSu, the DSv is provided so as to include only the PCS and makes the DSv the Normal Case. By this, it becomes unnecessary to provide an ODS with the same content as the content of the ODS in the preceding DS, and a data size in the BD-ROM may be reduced. On the other hand, because the DS as the Normal Case contains only the difference, it is not possible to compose the screen using the Normal Case alone.

The Epoch Continue indicates that Epoch continues across a boundary of AVClips. If Composition State of one DS_n is set as Epoch Continue, if the DS_n exists on an AVClip different from that of the DS_{n-1} positioned immediately before the DS_n, the DS_n and DS_{n-1} will belong to a same Epoch. Therefore even if AVClip branching occurs between these two DS, there will be no graphics plane/object buffer flash.

Details of the Definition Segments (ODS, WDS, and PDS) are explained below. The Object Definition Segment (ODS) is

a functional segment that defines the Graphics Object. An explanation of the Graphics Object is given first. A selling point of the AVClip recorded in the BD-ROM is its resolution as high as hi-vision, and therefore the resolution for the Graphics Object is set at 1920×1080 pixels. Because of the high resolution of 1920×1080 pixels, it is possible to display a specific character style for the subtitles clearly on the screen. As for colors of the subtitles, a bit length of an index value for each pixel (Color Difference Red Cr, Color Difference Blue Cb, Luminance Y, and Transparency T) is 8 bits, and thus it is possible to chose any 256 colors out of full color (16,777,216 colors) for the subtitles. The subtitles realized by the Graphics Object are rendered by positioning texts on a transparent background.

Syntax of ODS to define the Graphics Object is shown in FIG.7A. The ODS is made of segment_type indicating that the segment is the ODS, segment_length indicating a data length of the ODS, object_id uniquely identifying the Graphics Object corresponding to the ODS in the Epoch, object_version_number indicating a version of the ODS within the Epoch, last_in_sequence_flag, and object_data_fragment which is a consecutive sequence of bytes corresponding to a part or all of Graphics Object.

The object_id is for uniquely identifying the Graphics Object corresponding to the ODS in the Epoch. The Epoch of the graphics stream contains more than one ODS having the same ID. The ODS having the same ID also have the same width and height, and are assigned with a common area in the Object Buffer. After one of the ODS having the same ID is read in

the common area, the read ODS is overwritten by a subsequent ODS having the same ID. By overwriting the ODS that is read to the Object Buffer by the subsequent ODS having the same ID as the reproduction of the video stream proceeds, the graphics by the ODS is updated accordingly. A size constraint that the width and height of the Graphics Object having the same ID should be the same is applied only during one Epoch, and the Graphics Objects in different Epochs may have different sizes.

10 Explanations about `last_in_sequence_flag` and `object_data_fragment` are given next. In some cases, it is not possible to store the decompressed graphics that constitutes the subtitle in one ODS due to a payload constraint of the PES packet. In such cases, the graphics is split into a series
15 of consecutive fragments, and one fragment is set to the `object_data_fragment`. When one Graphics Object is stored as more than one fragment, every fragment except a last fragment has the same size. The last fragment is less than or equal to the size of previous fragments. The ODS carrying the
20 fragments appear in the same sequential order in the DS, with an end of the sequence indicated by the ODS having the `last_in_sequence_flag`. Although the above described syntax of the ODS is based on a premise that the fragments are stacked in from the preceding PES, the fragments may be stacked so
25 that each PES contains a blank part.

Next, the Palette Definition Segment (PDS) is explained. The PDS is used to define a palette for a color conversion. FIG. 7B shows syntax of the PDS. The PDS is made of `segment_type` indicating that the segment is the PDS, `segment_length`

indicating a data length of the PDS, palette_id uniquely identifying the palette contained in the PDS, palette_version_number indicating a version of the PDS within the Epoch, and palette_entry_id specifying an entry number of
5 the palette. The palette_entry_id indicates the Color Difference Red (Cr_value), the Color Difference Blue (Cb_value), Luminance (Y_value), and Transparency (T_value).

Next, an explanation about the Window Definition Segment (WDS) is given below.

10 The WDS is used to define the rectangular area on the Graphics Plane. As described in the above, the memory management is sequential only when erasing and rendering is performed within a certain area on the Graphics Plane. The area on the Graphics Plane is defined by the WDS and called
15 "Window". FIG.8A illustrates syntax of the WDS. As shown by the drawing, the WDS is made of segment_type indicating that the segment is the WDS, segment_length indicating a data length of the WDS, window_id uniquely identifying the Window on the Graphics Plane, window_horizontal_position specifying
20 a horizontal address of a top left pixel of the Window on the Graphics Plane, window_vertical_position specifying a vertical address of the top left pixel of the Window on the Graphics Plane, window_width specifying a width of the Window on the Graphics Plane, and window_height specifying a height
25 of the Window on the Graphics Plane.

Ranges of values that the window_horizontal_position, window_vertical_position, window_width, and window_height may take are explained below. A coordinate system for those values is within an area on the Graphics Plane, and whose

size is indicated two-dimensionally by the window_height for a height and the window_width for a width.

The window_horizontal_position specifies the horizontal address of the top left pixel of the Window on the Graphics Plane, and is within a range of 0 to (window_width)-1. Also, the window_vertical_position specifies the vertical address of the top left pixel of the Window on the Graphics Plane, and is within a range of 0 to (window_height)-1.

The window_width specifies the width of the Window on the Graphics Plane. The specified width falls within a range of 1 to (video_width)-(window_horizontal_position). Further, the window_height specifies the height of the Window on the Graphics Plane, and the specified height is within a range of 1 to (video_height)-(window_vertical_position).

The position and size of the Window on the Graphics Plane for each Epoch are defined by the window_horizontal_position, window_vertical_position, window_width, and window_height. Accordingly, it is possible to adjust the position and size of the Window at authoring, so that the Window in one Epoch appears at the position that does not come in the way of the picture when viewing the film. By this, the visibility of the subtitles becomes higher. Because the WDS is defined for each Epoch, it is possible to adjust the position of the Window according to the picture, even if the picture changes in the course of time. As a result, the quality of the film is maintained as high as in a case where the subtitles are incorporated in the main body of the film.

Next, the End of Display Set Segment (END) is explained.

The END provides an indication that a transmission of the DS is completed. The End is inserted into a stream immediately after a last ODS in one DS. The End is made of segment_type indicating that the segment is the END and segment_length indicating a data length of the END. The END does not include
5 any other element that requires a further explanation.

Next, an explanation about the Presentation Composition Segment (PCS) is given below.

The PCS is a functional segment that is used for composing
10 an interactive display. FIG. 8B illustrates syntax of the PCS. As shown in the drawing, the PCS is made of segment_type, segment_length, composition_number, composition_state, palette_update_flag, palette_id, and composition_object
1-m.

15 The composition_number identifies the Graphics Update in the DS by values in a range of 0 to 15. If the Graphics Update exists between the head of the Epoch and the PCS, the composition_number is incremented every time the Graphics Update occurs.

20 The composition_state indicates the type of the DS in which the PCS is contained, Normal Case, Acquisition Point, or Epoch Start.

The palette_update_flag indicates that the PCS describes a Palette only Display Update. The Palette only
25 Display Update indicates that only the palette is updated from an immediately previous palette. The palette_update_flag field is set to "1", if the Palette only Display Update is performed.

The palette_id identifies the palette to be used in the

Palette only Display Update.

The composition_object 1-m indicate how to control each Window in the DS to which the PCS belong. A broken line wd1 in FIG.8B is to detail an internal syntax for composition_object i. The composition_object i is made of object_id, window_id, object_cropped_flag, object_horizontal_position, an object_vertical_position, and cropping_rectangle information 1-n.

The object_id identifies the ODS in a Window corresponding to the composition_object i.

The window_id identifies the Window to which the Graphics Object is allocated in the PCS. Up to two Graphics Objects may be assigned to one Window.

The object_cropped_flag is used to switch between display and no-display of a cropped Graphics Object in the Object Buffer. When the object_cropped_flag is set to "1", the cropped Graphics Object is displayed in the Object Buffer, and if set to "0", the Graphics Object is not displayed.

The object_horizontal_position specifies a horizontal address of a top left pixel of the Graphics Object in the Graphics Plane.

The object_vertical_position specifies a vertical address of the top left pixel of the Graphics Object in the Graphics Plane.

The cropping_rectangle information 1-n are elements used when the object_cropped_flag is set to "1". A broken line wd2 is to detail an internal syntax for cropping_rectangle information i. As shown by the broken line wd2, the cropping_rectangle information i is made of four fields,

object_cropping_horizontal_position, object_cropping_vertical_position, object_cropping_width, and object_cropping_height.

5 The object_cropping_horizontal_position specifies a horizontal address of a top left corner of a cropping rectangle to be used during rendering of the Graphics Object in the Graphics Plane. The cropping rectangle is a cropping frame that is used to specify and crop a part of the Graphics Object, and corresponds to Region in the ETSI EN 300 743 standard.

10 The object_cropping_vertical_position specifies a vertical address of the top left corner of the cropping rectangle to be used during rendering of the Graphics Object in the Graphics Plane.

15 The object_cropping_width specifies a width of the cropping rectangle.

The object_cropping_height specifies a height of the cropping rectangle.

A specific example of the PCS is detailed below. In the example, the subtitles "Actually...", "I was hiding", and "my feelings." as shown in FIG. 6 appear gradually by writing to the Graphics Plane 3 times as the picture proceeds. FIG. 9 is an example of description for realizing such a subtitle display. An Epoch in the drawing includes a DS1 (Epoch Start), a DS2 (Normal Case), and a DS3 (Normal Case). The DS1 contains a WDS for specifying the Window in which the subtitles are displayed, an ODS for specifying the line "Actually... I was hiding my feelings.", and a first PCS. The DS2 contains a second PCS, and the DS3 contains a third PCS.

20

25

FIGs.10-12 illustrate examples of the WDS and PCS

contained in the DS. FIG.10 shows an example of the PCS in the DS1.

5 In FIG.10, the window_horizontal_position and the window_vertical_position of the WDS are indicated by a LP1, a position of the top left pixel of the Window on the Graphics Plane. The window_width and window_height indicate the width and height of the Window, respectively.

10 In FIG.10, the object_cropping_horizontal_position and object_cropping_vertical_position indicate a reference point ST1 of the cropping rectangle in the coordinate system in which an origin is the top left pixel of the Graphics Object. The cropping rectangle is an area having the width from the ST to the object_cropping_width, and the height from the ST to the object_cropping_height (a rectangle shown by a
15 heavy-line frame). The cropped Graphics Object is positioned within a rectangle shown by a broken-line frame cpl, with a reference point in the coordinate system with an origin at the object_horizontal_position and object_vertical_position (the top left pixel of the Graphics
20 Object) in the Graphics Plane. By this, the subtitle "Actually..." is written to the Window on the Graphics Plane, and then combined with the movie picture and displayed on the screen.

FIG.11 shows an example of the PCS in the DS2. The WDS
25 in the DS2 is not explained, because the WDS in the DS2 is the same as the WDS in the DS1. A description of the cropping information in the DS2 is different from the description of the cropping information shown in FIG.10.

In FIG.11, the object_cropping_horizontal_position and

object_cropping_vertical_position in the cropping information indicate a top left pixel of the subtitle "I was hiding" out of "Actually... I was hiding my feelings." in the Object Buffer. The object_cropping_width and
5 object_cropping_height indicates a width and a height of a rectangle containing the subtitle "I was hiding". By this, the subtitle "I was hiding" is written to the Window on the Graphics Plane, and then combined with the movie picture and displayed on the screen.

10 FIG.12 shows an example of the PCS in the DS3. The WDS in the DS3 is not explained, because the WDS in the DS3 is the same as the WDS in the DS1. A description of the cropping information in the DS3 is different from the description of the cropping information shown in FIG.10.

15 In FIG.12, the object_cropping_horizontal_position and object_cropping_vertical_position in the cropping information indicate a top left pixel of the subtitle "my feelings." out of "Actually... I was hiding my feelings." in the Object Buffer. The object_cropping_width and
20 object_cropping_height indicates a width and a height of a rectangle containing the subtitle "my feelings.". By this, the subtitle "my feelings." is written to the Window on the Graphics Plane, and then combined with the movie picture and displayed on the screen.

25 By describing the DS1, DS2, and DS3 as explained above, it is possible to achieve an effect of displaying the subtitles on the screen. It is also possible to achieve other kinds of effect, and description protocols for realizing other effects are explained below.

First, a description protocol for a Cut-In/Out effect is explained. FIG.13 shows an example of the description of the DS when Cut-In/Out is performed, illustrating along a timeline.

5 In the drawing, x and y in Window(x, y, u, v) respectively indicate values of the window_vertical_position and window_horizontal_position, and u and v respectively indicate values of the window_width and window_height. Also in the drawing, a and b in Cropping Rectangle(a, b, c, d) respectively
 10 indicate values of the object_cropping_vertical_position and object_cropping_horizontal_position, and c and d indicate values of the object_cropping_width and object_cropping_height, respectively. Display Sets DS11, DS12, and DS13 are at points $t11$, $t12$, and $t13$ on the
 15 reproduction timeline in the drawing.

The DS11 at the point $t11$ includes a PCS#0 in which the composition_state is "Epoch Start" and the object_cropped_flag is "0" (no_cropping_rectangle_visible), a WDS#0 having a statement for a Window in a width 700 × height
 20 500 at (100,100) in the Graphics Plane, a PDS#0, an ODS#0 indicating a subtitle "Credits:", and an END.

The DS12 at the point $t12$ includes a PCS#1 whose composition_state is "Normal Case" and indicating a crop operation of the Graphics Object to be in a 600×400 size from
 25 (0,0) in the Object Buffer (cropping_rectangle#0(0,0,600,400)), and positioning the cropped Graphics Object at the coordinates (0,0) in the Graphics Plane (on Window#0(0,0)).

The DS13 at the point $t13$ includes a PCS#2 whose

composition_state is "Normal Case" and in which the object_cropped_flag is set to "0" so as to erase the cropped Graphics Object (no_cropping_rectangle_visible).

With the above explained Display Sets, the subtitle
5 "Credits:" is no-display at the t11, appears at the t12, then becomes no-display at the t13 again, and the Cut-In/Cut-Out effect is realized.

Secondly, a description protocol for a Fade-In/Out effect is explained. FIG.14 shows an example of the
10 description of the DS when Fade-In/Out is performed, illustrating along a timeline. Display Sets DS21, DS22, DS23, and DS24 are at points t21, t22, t23, and t24 on the reproduction timeline in the drawing.

The DS21 at the point t21 includes a PCS#0 whose
15 composition_state is "Epoch Start" and indicating the crop operation of the Graphics Object to be in a 600×400 size from (0,0) in the Object Buffer (cropping_rectangle#0(0,0,600,400)), and positioning the cropped Graphics Object at the coordinates (0,0) in the
20 Graphics Plane (on Window#0(0,0)), a WDS#0 having a statement for a Window in a width 700 × height 500 at (100,100) in the Graphics Plane, a PDS#0, an ODS#0 indicating a subtitle "Fin", and an END.

The DS22 at the point t22 includes a PCS#1 whose
25 composition_state is "Normal Case", and a PDS#1. The PDS#1 indicates the same level of Cr and Cb as the PDS#0, but a luminance indicated by the PDS#1 is higher than the luminance in the PDS#0.

The DS23 at the point t23 includes a PCS#2 whose

composition_state is "Normal Case", a PDS#2, and an END. The PDS#2 indicates the same level of Cr and Cb as the PDS#1, but the luminance indicated by the PDS#2 is lower than the luminance in the PDS#1.

5 The DS24 at the point t24 includes a PCS whose composition_state is "Normal Case" and the object_cropped_flag is "0" (no_cropping_rectangle_visible), and an END.

Each DS specifies a different PDS from a preceding DS,
10 and accordingly, the luminance of the Graphics Object that is rendered with more than one PCS in one Epoch becomes gradually high, or low. By this, it is possible to realize the effect of Fade-In/Out.

Next, a description protocol for a Scrolling is explained.
15 FIG.15 shows an example of the description of the DS when Scrolling is performed, illustrating along a timeline. Display Sets DS31, DS32, DS33, and DS34 are at points t31, t32, t33, and t34 on the reproduction timeline in the drawing.

The DS31 at the point t31 includes a PCS#0 whose
20 composition_state is set to "Epoch Start" and object_cropped_flag is "0" (no_cropping_rectangle_visible), a WDS#0 having a statement for a Window in a width 700 × height 500 at (100,100) in the Graphics Plane, a PDS#0, an ODS#0 indicating a subtitle "Credits: Company", and an END.

25 The DS32 at the point t32 includes a PCS#1 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 600×400 size from (0,0) in the Object Buffer (cropping_rectangle#0(0,0,600,400)), and positioning the

cropped Graphics Object at the coordinates (0,0) in the Graphics Plane (on Window#0(0,0)). An area of the 600×400 size from (0,0) in the Object Buffer includes a part "Credits:" of the subtitle "Credits: Company" shown in two lines, and
5 thus the part "Credits:" appears on the Graphics Plane.

The DS33 at the point t33 includes a PCS#2 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 600×400 size from (0,100) in the Object Buffer (cropping_rectangle#0
10 (0,100,600,400)), and positioning the cropped Graphics Object at the coordinates (0,0) in the Graphics Plane (on Window#0(0,0)). The area of the 600×400 size from (0,100) in the Object Buffer includes the part "Credits:" and a part "Company" of the subtitle "Credits: Company" shown in two
15 lines, and thus the parts "Credits:" and "Company" appear in two lines on the Graphics Plane.

The DS34 at the point t34 includes a PCS#3 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 600×400 size from
20 (0,200) in the Object Buffer (cropping_rectangle#0 (0,200,600,400)), and positioning the cropped Graphics Object at the coordinates (0,0) in the Graphics Plane (on Window#0(0,0)). The area of the 600×400 size from (0,200) in the Object Buffer includes the part "Company" of the subtitle
25 "Credits: Company" shown in two lines, and thus the part "Company" appears on the Graphics Plane. By the above PCS description, it is possible to scroll down the subtitle in two lines.

Finally, a description protocol for a Wipe-In/Out effect

is explained. FIG.16 shows an example of the description of the DS when Wipe-In/Out is performed, illustrating along a timeline. Display Sets DS21, DS22, DS23, and DS24 are at points t21, t22, t23, and t24 on the reproduction timeline
5 in the drawing.

The DS51 at the point t51 includes a PCS#0 whose composition_state is set to "Epoch Start" and the object_cropped_flag is "0" (no_cropping_rectangle_visible), a WDS#0 having a statement for a Window in a width 700 × height
10 500 at (100,100) in the Graphics Plane, a PDS#0, an ODS#0 indicating a subtitle "Fin", and an END.

The DS52 at the point t52 includes a PCS#1 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 600×400 size from
15 (0,0) in the Object Buffer (cropping_rectangle#0(0,0,600,400)), and positioning the cropped Graphics Object at the coordinates (0,0) in the Graphics Plane (on Window#0(0,0)). An area of the 600×400 size from (0,0) in the Object Buffer includes the subtitle
20 "Fin", and thus the subtitle "Fin" appears on the Graphics Plane.

The DS53 at the point t53 includes a PCS#2 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 400×400 size from
25 (200,0) in the Object Buffer (cropping_rectangle#0(200,0,400,400)), and positioning the cropped Graphics Object at the coordinates (200,0) in the Graphics Plane (on Window#0(200,0)). By this, an area indicated by coordinates (200,0) and (400,400) in the Window becomes a display area,

and an area indicated by coordinates (0,0) and (199,400) becomes a no-display area.

The DS54 at the point t54 includes a PCS#3 whose composition_state is "Normal Case" and indicating the crop operation of the Graphics Object to be in a 200×400 size from (400,0) in the Object Buffer (cropping_rectangle#0 (400,0,200,400)), and positioning the cropped Graphics Object at the coordinates (400,0) in the Graphics Plane (on Window#0(400,0)). By this, an area indicated by coordinates (0,0) and (399,400) becomes the no-display area.

By this, as the no-display area becomes larger, the display area becomes smaller, and thus the Wipe-In/Out effect is realized.

As described above, various effects such as Cut-In/Out, Fade-In/Out, Wipe-In/Out, and Scrolling may be realized using corresponding scripts, and therefore it is possible to make various arrangements in rendering the subtitles.

Constraints for realizing the above effects are as follows. In order to realize the Scrolling effect, operations for clearing and redrawing of the Window becomes necessary. Taking the example of FIG.15, it is necessary to perform "window clear" to erase the Graphics Object "Credits:" at the t32 from the Graphics Plane, and then to perform "window redraw" to write a lower part of "Credits:" and an upper part of "Company" to the Graphics Plane during an interval between the t32 and t33. Given that the interval is the same as an interval of video frames, a transfer rate between the Object Buffer and the Graphics Plane desirable for the Scrolling effect becomes an important point.

Here, a constraint about how large the Window may be is looked into. An R_c is the transfer rate between the Object Buffer and the Graphics Plane. A worst scenario here is to perform both of the Window clear and Window redraw at the rate R_c . In this case, each of the Window clear and Window redraw is required to be performed at a rate half of R_c ($R_c/2$).

In order to make the Window clear and Window redraw synchronized with a video frame, an equation below is need to be satisfied.

10
$$\text{Window size} \times \text{Frame Rate} \leq R_c/2$$

If the Frame Rate is 29.97, R_c is expressed by an equation below.

$$R_c = \text{Window size} \times 2 \times 29.97$$

15 In rendering the subtitles, the Window size accounts for at least 25% to 33% of the Graphics Plane. A total number of pixels in the Graphics Plane is 1920×1080 . Taking that an index bit length per pixel is 8 bits, a total capacity of the Graphics Plane is 2 Mbytes ($\square 1920 \times 1080 \times 8$).

20 Taking that the Window size is 1/4 of the total capacity of the Graphics Plane, the Window size becomes 500 Kbytes ($= 2 \text{ Mbytes} / 4$). By substituting this value to the above equation, R_c is calculated to be 256 Mbps ($= 500 \text{ Kbytes} \times 2 \times 29.97$). If the rate for the Window clear and Window redraw may be a half or a quarter of the frame rate, it is possible to double or quadruple the size of the Window even if the R_c is the same.

25 By keeping the Window size 25% to 33% of the Graphics Plane and displaying the subtitles at the transfer rate of 256 Mbps, it is possible to maintain the sync display between

the graphics and the movie picture, no matter what kind of display effect is to be realized.

Next, the position, size, and area of the Window are explained. As explained above, the position and area of the Window does not change in one Epoch. The position and the size of the Window set to be the same during one Epoch because it is necessary to change a target write address of the Graphics Plane if the position and the size change, and changing the address causes an overhead that lowers the transfer rate from the Object Buffer to the Graphics Plane.

A number of Graphics Objects per Window has a limitation. The limitation of the number is provided in order to reduce the overhead in transferring decoded Graphics Object. The overhead here is generated when setting the address of an edge of the Graphics Object, and the more a number of edges, the more the overhead is generated.

FIG.17 shows examples in comparison, an example in which a Window has four Graphics Objects and another example in which a Window has two Graphics Objects. The number of the edges of the example with four Graphics Objects is twofold of the number of the edges of the example with two Graphics Objects.

Without the limitation in the number of the Graphics Object, it becomes unknown how many overheads could be generated in transferring the Graphics, and thus the load for the transfer increases and decreases drastically. On the other hand, when a maximum number of the Graphics Object in a Window is two, the transfer rate may be set taking up to 4 overhead into account. Accordingly, it is easier to set

the number of a minimum transfer rate.

Next, an explanation about how the DS having the PCS and ODS is assigned to the timeline of the AVClip. The Epoch is a period of time in which a memory management is consecutive along the reproduction timeline. Since the Epoch is made of more than one DS, how to assign the DS to the reproduction timeline of the AVClip is important. The reproduction timeline of the AVClip is a timeline for specifying timings for decoding and reproducing of each piece of picture data that constitute the video stream multiplexed to the AVClip. The decoding and reproducing timings on the reproduction timeline are expressed at an accuracy of 90 KHz. A DTS and PTS that are attached to the PCS and ODS in the DS indicate timings for a synchronic control on the reproduction timeline. The assigning of the Display Set to the reproduction timeline means performing the synchronic control using the DTS and PTS attached to the PCS and ODS.

First, how the synchronic control is performed using the DTS and PTS attached to the ODS is explained below.

The DTS indicates, at the accuracy of 90 KHz, a time when the decoding of the ODS starts, and the PTS indicates a time when the decoding ends.

The decoding of the ODS does not finish at once, and has a certain length of time. In response to a request for clearly indicating a starting point and an ending point of a decode duration, the DTS and PTS of the ODS respectively indicate the times when the decoding starts and ends.

The value of the PTS indicates the deadline, and therefore it is necessary that the decoding of the ODS has

to be completed by the time indicated by the PTS and the decompressed Graphics Object is written to the Object Buffer on the reproduction apparatus.

The decode starting time of any ODSj in a DS_n is indicated
 5 by a DTS(DS_n[ODS]) at the accuracy of 90 KHz. Adding a maximum length of the decode duration to the DTS(DS_n[ODS]) is the time when the decoding of the ODSj ends.

When a size of the ODSj is "SIZE(DS_n[ODSj])" and a decoding rate of the ODS is an "Rd", the maximum time required
 10 for decoding indicated by second is expressed in "SIZE(DS_n[ODSj])/Rd". The symbol "/" indicates an operator for a division with rounding up after a decimal place.

By converting the maximum time period into a number expressed at the accuracy of 90 KHz and adding to the DTS
 15 of the ODSj, the time when the decoding ends (90 KHz) indicated by the PTS is calculated.

The PTS of the ODSj in the DS_n is expressed in a following equation.

$$\begin{aligned} & \text{PTS}(\text{DS}_n[\text{ODS}_j]) = \\ 20 & \text{DTS}(\text{DS}_n[\text{ODS}_j]) + 90,000 \times (\text{SIZE}(\text{DS}_n[\text{ODS}_j]) / \text{Rd}) \end{aligned}$$

Further, it is necessary that a relation between two succeeding ODS, ODSj and ODSj+1, satisfies a following equation.

$$\text{PTS}(\text{DS}_n[\text{ODS}_j]) \leq \text{DTS}(\text{DS}_n[\text{ODS}_{j+1}])$$

25 Next, settings of the DTS and PTS of the PCS are explained.

It is necessary that the PCS is loaded to the Object Buffer on the reproduction apparatus before the decode starting time (DTS(DS_n[ODS₁])) of a first ODS (ODS₁) in the DS_n, and before the time (PTS(DS_n[PDS₁])) when a first PDS

(PDS1) in the DS_n becomes valid. Accordingly, it is necessary that the DTS is set so as to satisfy following equations.

$$DTS(DS_n[PCS]) \leq DTS(DS_n[ODS1])$$

$$DTS(DS_n[PCS]) \leq PTS(DS_n[PDS1])$$

5 Further, the PTS of the PCS in the DS_n is expressed in a following equation.

$$PTS(DS_n[PCS]) \geq DTS(DS_n[PCS]) + \text{decodeduration}(DS_n)$$

The "decodeduration(DS_n)" indicates a time duration for decoding all the Graphics Objects used for updating PCS. The
 10 decode duration is not a fixed value, but does not vary according to a status of the reproduction apparatus and a device or a software mounted to the reproduction apparatus. When the Object used for composing a screen of a DS_n.PCS_n is a DS_n.PCS_n.OBJ[j], the decodeduration(DS_n) is affected
 15 by time (i) needed for clearing the Window, decode durations (ii) for decoding a DS_n.PCS_n.OBJ, and time (iii) needed for writing of the DS_n.PCS_n.OBJ. When the Rd and Rc are set, the decode_duration(DS_n) is always the same. Therefore, the PTS is calculated by calculating lengths of these durations in
 20 authoring.

The calculation of the decode_duration is performed based on a program shown in FIG.18. FIGs.19, 20A and 20B are flowcharts schematically showing algorithms of the program. An explanation about the calculation of the decode_duration
 25 is given below referring to these drawings. In the flowchart shown in FIG.19, first, a PLANEINITIALZE function is called (Step S1 in FIG.19). The PLANEINITIALZE function is used for calling a function for calculating a time period necessary to initialize the Graphics Plane for rendering the DS. In

the Step S1 in FIG.19, the function is called with arguments DSn, DSn.PCS.OBJ[0], and decode_duration.

The following explains the PLANEINITIALIZE function in reference to FIG.20A. In the drawing, initialize_duration
 5 is a variable indicating a return value of the PLANEINITIALIZE function.

Step S2 in FIG.20 is an if statement for switching operations depending on whether or not the page_state in the PCS in the DSn indicates the Epoch Start. If the page_state
 10 indicates the Epoch Start (DSn.PCS.page_state==epoch_start, Step S2=Yes in FIG.18), a time period necessary to clear the Graphics Plane is set to an initialize_duration (Step S3).

When the transfer rate Rc between the Object Buffer and the Graphics Plane is 256,000,000 as described in the above,
 15 and the total size of the Graphics Plane is set to video_width*video_height, the time period necessary to clear is "video_width*video_height//256,000,000". When multiplied by 90.000Hz so as to express at the time accuracy of PTS, the time period necessary to clear the Graphics Plane
 20 is "90,000*video_width*video_height//256,000,000". This time period is added to the initialize_duration.

If the page_state does not indicate the Epoch Start (Step S2=No), a time period necessary to clear Window[i] defined by the WDS is added to the initialize_duration for all Windows
 25 (Step S4). When the transfer rate Rc between the Object Buffer and the Graphics Plane is 256,000,000 as described in the above and a total size of Window[i] that belongs to the WDS is $\sum \text{SIZE}(\text{WDS.WIN}[i])$, the time period necessary to clear is " $\sum \text{SIZE}(\text{WDS.WIN}[i]) // 256,000,000$ ". When multiplied by

90.000Hz so as to express at the time accuracy of PTS, the time period necessary to clear the Windows that belong to the WDS is "90,000×ΣSIZE(WDS.WIN[i])/256,000,000". This time period is added to the initialize_duration, and the
 5 initialize_duration as a result is returned. The above is the PLANEINITIALIZE function.

Step S5 in FIG.19 for switching operations depending on whether the number of the Graphics Objects in the DS_n is
 2 or 1 (if(DS_n.PCS.num_of_object==2,
 10 if(DS_n.PCS.num_of_object==1 in FIG.18), and if the number is 1 (Step S5), a waiting time for decoding the Graphics Object is added to the decode_duration (Step S6). Calculation of the waiting time is performed by calling a WAIT function
 (decode_duration +=WAIT(DS_n, DS.PCS.OBJ[0],
 15 decode_duration) in FIG.18). The function is called using arguments set to DS_n, DS_n.PCS.OBJ[0], decode_duration, and a return value is wait_duration.

FIG.20B is a flowchart showing an operation of the WAIT function.

20 In the flowchart, the decode_duration of an invoker is set as a current_duration. An object_definition_ready_time is a variable set to the PTS of the Graphics Object of the DS.

A current_time is a variable set to a total value of
 25 the current_duration and the DTS of the PCS in the DS_n. When the object_definition_ready_time is larger than the current_time (Yes to Step S7, if(current_time < object_definition_ready_time)), the wait_duration as the return value is set to be a difference between the

object_definition_ready_time and the current_time (Step S8, wait_duration += object_definition_ready_time - current_time). The decode_duration is set to the time period that the return value of the WAIT function added to the time
 5. period necessary for re-drawing the Window, $(90,000 * (SIZE(DSn.WDS.WIN[0])) // 256,000,000)$.

The above explanation is for the case in which the number of the Graphics Object is one. In Step S5 in FIG.5, it is judged if the number of the Graphics Objects is two. If the
 10. number of the Graphics Objects in the DSn is more than two (if(DSn.PCS.num_of_object==2) in FIG.18), the WAIT function is called using OBJ[0] in the PCS as an argument, and add a return value to the decode_duration (Step S10).

In a succeeding Step S11, it is judged if the Window
 15. to which the OBJ[0] of the DSn belongs is the same as the Window to which the Graphics Object [1] belongs (if(DSn.OBJ[0].window_id==DSn.PCS.OBJ[1].window_id). If the Window is the same, the WAIT function is called using OBJ[1] as an argument, and add a return value wait_duration to the decode_duration
 20. (Step S12), and add the time necessary to redraw the Window to which OBJ[0] belong $(90,000 * (SIZE(DSn.WDS.OBJ[0].window_id)) // 256,000,000)$ to the decode_duration (Step S13).

If it is judged that the Windows are different (Step S11, "different"), the time necessary to redraw the Window
 25. is added to which OBJ[0] belong $(90,000 * (SIZE(DSn.WDS.OBJ[0].window_id)) // 256,000,000)$ to the decode_duration (Step S15), the WAIT function is called using OBJ[1] as an argument, and add a return value wait_duration to the decode_duration (Step S16), and the time necessary to redraw the Window to which

OBJ[1] belong $(90,000 * (\text{SIZE}(\text{DSn.WDS.OBJ}[0].\text{window_id})) // 256,000,000)$ to the decode_duration (Step S17).

The decode_duration is calculated by the above algorithm. A specific manner in which the PTS of the OCS is set is explained
5 below.

FIG.21A illustrates a case in which one ODS is included in one Window. FIGs.21B and 21C are timing charts showing values in an order of time that are referred to in FIG.18. A bottom line "ODS Decode" and a middle line "Graphics Plane
10 Access" in each chart indicate two operations that are performed simultaneously when reproducing. The above algorithm is described assuming that these two operations are performed in parallel.

The Graphics Plane Access includes a clearing period
15 (1) and a write period (3). The clearing period (1) indicates either a time period necessary to clear an entire Graphics Plane $(90,000 * (\text{size of Graphics Plane} // 256,000,000))$, or a time period necessary to clear all Windows on the Graphics Plane $(\sum (90,000 * (\text{size of Window [i]} // 256,000,000)))$.

20 The write period (3) indicates a time period necessary to render an entire Window $(90,000 * (\text{size of Window [i]} // 256,000,000))$.

Further, a decode period (2) indicates a time period between the DTS and the PTS of the ODS.

25 Lengths of the clearing period (1), the decode period (2), and the write period (3) may vary depending on a range to be cleared, a size of ODS to be decoded, and a size of the Graphics Object to be written to the Graphics Plane. For convenience, a starting point of the decode period (2) in

the drawing is the same as a starting point of the clearing period (1).

FIG.21B illustrates a case in which the decode period (2) is long, and the decode_duration equals to a total of
5 the decode period (2) and the write period (3).

FIG.21C illustrates a case in which the clearing period (1) is long, and the decode_duration equals to a total of the clearing period (1) and the write period (3).

FIGs.22A to 22C illustrate a case in which two ODS is
10 included in one Window. The decode period (2) in both FIGs.22B and 22C indicates a total time period necessary for decoding two Graphics. Likewise, the write period (3) indicates a total time period necessary for writing two Graphics to the Graphics Plane.

15 Even though the number of ODS is two, it is possible to calculate the decode_duration in the same manner as in the case of FIG.21. When the decode period (3) for decoding the two ODS is long, the decode_duration equals to a total of the decode period (2) and the write period (3) as shown
20 in FIG.22B.

When the clearing period (1) is long, the decode_duration equals to a total of the clearing period (1) and the write period (3).

FIG.23A describes a case in which each of two Windows
25 includes an ODS. As in the previous cases, when the clearing period (1) is longer than the decode period (3) for decoding the two ODS, the decode_duration equals to a total of the clearing period (1) and the write period (3). However, when the clearing period (1) is shorter than the decode period

(3), it is possible to write to a first Window before the decode period (2) ends. Accordingly, the decode_duration does not equal to either of a total of the clearing period (1) and the write period (3), or a total of the decode period (2) and the write period (3).

When a time period necessary for decoding a first ODS is a write period (31) and a time period necessary for decoding a second ODS is a write period (32), FIG.23B illustrates a case in which the decode period (2) is longer than a total of the clearing period (1) and the write period (31). In this case, the decode_duration equals to a total of the decode period (2) and the write period (32):

FIG.23C illustrates a case in which a total of the clearing period (1) and the write period (31) is longer than the decode period (2). In this case, the decode_duration equals to a total of the clearing period (1), the write period (31), and the write period (32).

The size of the Graphics Plane is known from a model of the reproduction apparatus in advance. Also, the size of the Window, and the size and number of the ODS are also known at the authoring. Accordingly, it is possible to find to which combination of time periods the decode_duration equals: the clearing period (1) and the write period (3), the decode period (2) and the write period (3), the decode period (2) and the write period (32), or the clearing period (1), the write period (3) and the write period (32).

By setting the PTS of the ODS based on the calculation of the decode_duration explained above, it is possible to synchronously display the graphics with the picture data at

a high accuracy. Such a sync display at a high accuracy becomes possible by defining the Window and limiting an area to re-draw to the Window. Thus, introducing a concept of Window into an authoring environment has a great significance.

- 5 The following is an explanation about settings of the DTS and PTS of the WDS in the DS_n. The DTS of the WDS may be set so as to satisfy an equation below.

$$\text{DTS}(\text{DSn}[\text{WDS}]) \geq \text{DTS}(\text{DSn}[\text{PCS}])$$

- On the other hand, the OTS of the WDS in the DS_n indicates
 10 a deadline to start writing to the Graphics Plane. Because it is sufficient to write to the Window on the Graphics Plane, the time to start writing to the Graphics Plane is determined by subtracting a time length indicated by the PTS of the PCS from a time period necessary for writing the WDS. When a total
 15 size of the WDS is $\sum \text{SIZE}(\text{WDS.WIN}[i])$, the time necessary for clearing and re-drawing is " $\sum \text{SIZE}(\text{WDS.WIN}[i]) // 256,000,000$ ". When expressing at a time accuracy of 90.000 KHz, the time is " $90,000 \times \sum \text{SIZE}(\text{WDS.WIN}[i]) // 256,000,000$ ".

- Accordingly, it is possible to calculate the PTS of the
 20 WDS by the following equation.

$$\text{PTS}(\text{DSn}[\text{WDS}]) =$$

$$\text{PTS}(\text{DSn}[\text{PCS}]) - 90000 \times \sum \text{SIZE}(\text{WDS.WIN}[i]) // 256,000,000$$

- The PTS indicated in the WDS is the deadline, and it is possible to start writing to the Graphics Plane earlier
 25 than the PTS. In other words, as shown in FIG.23, once decoding the ODS to be rendered in one of the Windows, writing of the Graphics Object obtained by the decoding may start at this point.

As described above, it is possible to assign the Window

to any point of time on the reproduction timeline of the AVClip using the DTS and PTS added to the WDS.

Explanations about an example of settings of the DTS and PTS in a Display Set based on the settings are give below,
5 referring to specific example illustrated in FIGs.24-25. The example is about a case in which subtitles are displayed by writing to the Graphics Plane four times, and an update is performed for displaying each of two subtitles "what is blu-ray." and "blu-ray is everywhere." FIG.24 illustrates
10 chronological transition of the update in the example. Until a point t1, "what" is displayed, and "what is" is displayed after the t1 till a t2, and then "what is blu-ray." is displayed at a t3. After a whole sentence of a first subtitle has appeared, a second subtitle "blu-ray is everywhere." is displayed at
15 a t4.

FIG.25A illustrates four Display Sets that are described so as to perform the above explained update. A DS1 includes a PCS1.2 for controlling an update at the t1, a PDS1 for coloring, an ODS1 corresponding to the subtitle "what is blu-ray.",
20 and an END as an ending code of the DS1.

A DS2 includes a PCS1.2 for controlling an update at the t2, and an END. A DS 3 includes a PCS1.3 for controlling an update at a t3 and an END. A DS 4 includes a PCS2 for controlling an update at the t2, a PDS2 for color conversion,
25 an ODS2 corresponding to the subtitle "blu-ray is everywhere.", and an END.

Referring to a timing chart in FIG.25B, settings of DTS and PTS for each functional segment in the four Display Sets are explained.

The reproduction timeline in the timing chart is the same as the timeline in FIG.24. In the timing chart of FIG.25A, PTS(PCS1.1), PTS(PCS1.2), PTS(PCS1.3), and PTS(PCS2) are respectively set at a display point t1 for displaying "what",
 5 a display point t2 for displaying "what is", a display point t3 for displaying "what is blu-ray.", and a display point t4 for displaying "blue-ray is everywhere.". Each PTS are set as above, because it is necessary that the control such as cropping described in each PCS is performed at the display
 10 point of each subtitle.

PTS(ODS1) and PTS(ODS2) are set so as to indicate points that are calculated by subtracting decode_duration from the points indicated by PTS(PCS1.1) and PTS(PCS2), respectively, because PTS(PCS) is required to be set so as to satisfy a
 15 formula below.

$$PTS(DSn[PCS]) \geq DTS(DSn[PCS]) + \text{decodeduration}(DSn)$$

In FIG.25B, PTS(ODS2) is set so as to indicate a point t5 that comes before the point t4, and PTS(ODS1) is set so as to indicate a point t0 that comes before the point t1.

20 DTS(ODS1) and DTS(ODS2) are set so as to indicate points that are calculated by subtracting decode_duration from the points indicated by PTS(ODS1) and PTS(ODS2), respectively, because DTS(ODS) is required to be set so as to satisfy an equation below.

$$25 \quad PTS(DS[ODSj]) = DTS(DSn[ODSj]) + 90,000 \times (SIZE(DSn[ODSj]) // Rd)$$

In FIG.25B, PTS(ODS2) is set so as to indicate the point t5 that comes before the point t0, and PTS(ODS1) is set so as to indicate a point that comes before the point t0. A

a Video Plane 6, an Audio Decoder 7, a Graphics Plane 8, a CLUT unit 9, an adder 10, a Graphics Decoder 12, a Coded Data Buffer 13, a peripheral circuit 13a, a Stream Graphics Processor 14, an Object Buffer 15, a Composition Buffer 16, and a Graphics controller 17.

The BD drive 1 performs load/read/eject of the BD-ROM, and accesses to the BD-ROM.

The Read Buffer 2 is a FIFO memory for storing the TS packets read from the BD-ROM in a first-in first-out order.

The PID filter 3 filters more than one TS packet outputted from the Read Buffer 2. The filtering by the PID filter 3 is to write the only TS packets having a desired PID to the Transport Buffers 4a-4c. Buffering is not necessary for the filtering by the PID filter 3, and accordingly, the TS packets inputted to the PID filter 3 are written to the Transport Buffers 4a-4c without delay.

The Transport Buffers 4a-4c are for storing the TS packets outputted from the PID filter 3 in a first-in first-out order. A speed at which the TS packets from the Transport Buffers 4a-4c are outputted is a speed Rx.

The peripheral circuit 4d is a wired logic for converting the TS packets read from the Transport Buffers 4a-4c into functional segments. The functional segments obtained by the conversion are stored in the Coded Data Buffer 13.

The Video Decoder 5 decodes the more than one TS packets outputted from the PID filter 3 into a decompressed picture and writes to the Video Plane 6.

The Video Plane 6 is a plane memory for a moving picture.

The Audio Decoder 7 decodes the TS packets outputted

from the PID filter 3 and outputs decompressed audio data.

The Graphics Plane 8 is a plane memory having an area for one screen, and is able to store decompressed graphics for one screen.

5 The CLUT unit 9 converts an index color of the decompressed Graphics stored in the Graphics Plane 8 based on the values for Y, Cr, and Cb indicated by the PDS.

10 The adder 10 multiplies the decompressed Graphics to which the color conversion has been performed by the CLUT unit 9 by the T value (Transparency) indicated by the PDS, adds the decomposed picture data stored in the Video Plane per pixel, then obtains and outputs the composed image.

15 The Graphics Decoder 12 decodes the Graphics Stream to obtain the decomposed graphics, and writes the decomposed graphics as the Graphics Object to the Graphics Plane 8. By decoding the Graphics Stream, the subtitles and menus appear on the screen. The Graphics Decoder 12 includes the Coded Data Buffer 13, the peripheral circuit 13a, the Stream Graphics Processor 14, the Object Buffer 15, the Composition Buffer 20 16, and the Graphics controller 17.

25 The Coded Data Buffer 13 is a buffer in which the functional segment is stored along with the DTS and PTS. The functional segment is obtained by removing a TS packet header and a PES packet header from each TS packet in the Transport Stream stored in the Transport Buffer 4a-4c and by arranging the payloads sequentially. The PTS and DTS out of the removed TS packet header and PES packet header are stored after making correspondence between the PES packets.

The peripheral circuit 13a is a wired logic that realizes

a transfer between the Coded Data Buffer 13 and the Stream Graphics Processor 14, and a transfer between the Coded Data Buffer 13 and the Composition Buffer 16. In the transfer operation, when a current time is a time indicated by the DTS of the ODS, the ODS is transferred from the Coded Data Buffer 13 to the Stream Graphics Processor 14. When the current time is a time indicated by the DTS of the PCS and PDS, the PCS and PDS are transferred to the Composition Buffer 16.

10 The Stream Graphics Processor 14 decodes the ODS, and writes the decompressed graphics of the index color obtained by decoding as the Graphics Object to the Object Buffer 15. The decoding by the Stream Graphics Processor 14 starts at the time of the DTS corresponding to the ODS, and ends by
15 the decode end time indicated by the PTS corresponding to the ODS. The decoding rate R_d of the Graphics Object is an output rate of the Stream Graphics Processor 14.

 The Object Buffer 15 is a buffer corresponding to a pixel buffer in the ETSI EN 300 743 standard, and the Graphics Object
20 obtained by the decode that the Stream Graphics Processor 14 performs is disposed. The Object Buffer 15 needs to be set to twice or four times as large as the Graphics Plane 8, because in case the Scrolling effect is performed, the Object Buffer 15 needs to store the Graphics Object that is
25 twice or four times as large as the Graphics Plane.

 The Composition Buffer 16 is a memory in which the PCS and PDS are disposed.

 The Graphics controller 17 decodes the PCS disposed in the Composition Buffer 16, and performs a control based on

the PCS. A timing for performing the control is based on the PTS attached to the PCS.

Next, recommended values for the transfer rate and buffer size for structuring the PID filter 3, Transport Buffer 4a-4c, Graphics Plane 8, CULT unit 9, Coded Data Buffer 13, and Graphics controller 17 are explained. FIG.27 illustrates sizes of the write rates Rx, Rc, and Rd, Graphics Plane 8, Coded Data Buffer 13, Object Buffer 15, and Composition Buffer 16.

10 The transfer rate Rc between the Object Buffer 15 and the Graphics Plane 8 is the highest transfer rate in the reproduction apparatus of the present embodiment, and calculated as 256Mbps ($=500 \text{ Kbytes} \times 29.97 \times 2$) from the window size and the frame rate.

15 Unlike the Rc, the transfer rate Rd (Pixel Decoding Rate) between the Stream Graphics Processor 14 and Object Buffer 15 does not need to be updated every video frame cycle, and 1/2 or 1/4 of the Rc is sufficient for the Rd. Accordingly, the Rd is either 128 Mbps or 64 Mbps.

20 The Transport Buffer Leak Rate Rx between the Transport Buffer 4a-4c and Coded Data Buffer 13 is a transfer rate of the ODS in a compressed state. Accordingly, the transfer rate Rd multiplied by the compression rate is sufficient for the Transport Buffer leak rate Rx. Given the compression rate of the ODS is 25%, 16 Mbps ($=64 \text{ Mbps} \times 25\%$) is sufficient.

The transfer rates and buffer sizes shown in the drawing are the minimum standard, and it is also possible to set at higher rates and larger sizes.

In the above structured reproduction apparatus, each

elements perform a decoding operation in a pipeline structure.

FIG.28 is a timing chart illustrating a pipeline processing by the reproduction apparatus. A 5th row in the drawing is a Display Set in the BD-ROM, a 4th row shows read periods from the PCS, WDS, PDS, and ODS to the Coded Data Buffer 13. A 3rd row shows decode periods of each ODS by the Stream Graphics Processor 14. A 1st row shows operations that the Graphics controller 17 performs.

The DTS (decode starting time) attached to the ODS1 and ODS2 indicate t_{31} and t_{32} in the drawing, respectively. Because the decode starting time is set by DTS, each ODS is required to be read out to the Coded Data Buffer 13. Accordingly, the reading of the ODS1 is completed before a decode period dp_1 in which the ODS1 is decoded to the Coded Data Buffer 13. Also, the reading of the ODS2 is completed before a decode period dp_2 in which the ODS2 is decoded to the Coded Data Buffer 13.

On the other hand, the PTS (decode ending time) attached to the ODS1 and ODS2 indicate t_{32} and t_{33} in the drawing, respectively. Decoding of the ODS1 by the Stream Graphics Processor 14 is completed by the t_{32} , and decoding of the ODS2 is completed by a time indicated by the t_{33} . As explained above, the Stream Graphics Processor 14 reads the ODS to the Coded Data Buffer 13 by the time the DTS of the ODS indicates, and decodes the ODS read to the Coded Data Buffer 13 by the time the PTS of the ODS indicates, and write the decoded ODS to the Object Buffer 15.

A period cd_1 at the 1st row in the drawing indicates a period necessary for the Graphics controller 17 to clear

the Graphics Plane. Also, a period tdl indicates a period necessary to write the Graphics Object obtained on the Object Buffer to the Graphics Plane 8. The PTS of the WDS indicates the deadline to start writing, and the PTS of the PCS indicates
5 ending of the write and a timing for display. At the time indicated by the PTS of the PCS, the decompressed graphics to compose an interactive screen is obtained on the Graphics Plane 8.

After the CLUT unit 9 performs the color conversion of
10 the decompressed graphics and the adder 10 performs composition of the decomposed graphics and a decomposed picture stored in the Video Plane 6, a composite image is obtained.

In the Graphics Decoder 12, the StreamGraphics Processor
15 14 performs decoding continuously while the Graphics controller 17 performs clearing of the Graphics Plane 8. By the above pipeline processing, it is possible to perform a prompt display of the graphics.

In FIG.28, a case in which the clearing of the Graphics
20 Plane ends before completing the decoding of the ODS is explained. FIG.29 illustrates a timing chart in a pipeline processing of a case in which the decoding of the ODS ends before the clearing of the Graphics Plane is completed. In this case, it is not possible to write to the Graphics Plane
25 at a time of completion of the decoding of the ODS. When the clearing of the Graphics Plane is completed, it becomes possible to write the graphics obtained by the decode to the Graphics Plane.

Next, a chronological transition in buffer occupancy

is explained. FIG.30 is a timing chart showing the chronological transitions of the following components shown in FIG.26: the composition buffer 16, the object buffer 16, the coded data buffer 13, and the Graphics Plane 8. The first to fourth rows illustrate the chronological transitions in occupancy of the Graphics Plane 8, the object buffer 15, the coded data buffer 13, and the composition buffer 16, respectively. Here, a chronological transition is described using line graph, in which the lateral axis represents timeline, and the longitudinal axis represents occupancy.

The fourth row of FIG.30 shows the chronological transition in occupancy for the composition buffer 16. As the fourth row shows, the chronological transition for the composition buffer 16 includes a part "vfo", which represents a simple increase which is due to storage of PCS outputted from the coded data buffer 13.

The third row shows the chronological transition in occupancy for the coded data buffer 13. As the third row shows, the chronological transition for the coded data buffer 13 includes two simply increasing parts vf1 and vf2, and two simply decreasing parts vg1 and vg2. The gradients of the simply increasing parts vf1 and vf2 depend on the output rate Rx of the transport buffers 4a,b,c to the coded data buffer 13, and the gradients of the simply decreasing parts vg1 and vg2 represent decoding performed by the stream graphics processor 14, which is performed in an instant. In other words, decoding for ODS is performed instantly, and the stream graphics processor 14 retains the decompressed graphics obtained by the decoding. The write rate of the transmission

path from the stream graphics processor 14 to the object buffer 15 is 128 Mbps. Therefore the occupancy of the object buffer 15 increases in accordance with this write rate.

The second row represents the chronological transition in occupancy for the object buffer 15. As the second row shows, the chronological transition for the object buffer 15 includes simply increasing parts $vh1$ and $vh2$, which is due to storage of ODS outputted from the stream graphics processor 14. The gradients of the simply increasing parts $Vh1$ and $Vh2$ depend on the transfer rate Rc from the stream graphics processor 14 to the object buffer 15. The periods during which simply decreasing parts at the third row and the simply increasing parts at the second row occur correspond to "decode period". The start of such a decode period is indicated by the DTS of the ODS, and the end of the decode period is indicated by the PTS of the ODS. If the decompressed graphics is stored in the object buffer 15 until the time shown by the DTS of the ODS, that means the completion of decoding directed to the ODS. As long as the decompressed graphics is stored in the object buffer 15 until the time shown by the PTS of the ODS, the simply increasing parts and the simply decreasing parts, during this decode period, may take any form.

The first row represents the chronological transition in occupancy for the Graphics Plane 8. As the first row shows, the chronological transition for the Graphics Plane 8 includes a simply increasing part $vf3$, which is due to storage of already decoded ODS outputted from the Object Buffer 15. The gradient of the simply increasing part $Vf3$ depends on the transfer rate Rd from the Object Buffer 15 to the Graphics Plane 8.

The end of the simply increasing part is shown by the PTS of ODS.

The graphs such as in FIG.27 are illustrated using: DTS and PTS assigned to ODS; DTS and PTS assigned to ICS; size and transfer rate of each buffer illustrated in FIG.27. Furthermore, by creating the graphs such as in this diagram, users can know how the state of each buffer changes, at the authoring stage.

Since the transition of the state of each buffer can be adjusted by updating DTS and PTS, it becomes possible to avoid decoding load, which would exceed the specification of the decoder, from being imposed on the reproduction apparatus, and to avoid buffer overflow incident to reproduction. According to this, the hardware/software implementation will become easy, in the developing phase of reproduction apparatuses.

Next, how the controlling unit 20 and the Graphics Decoder 12 are implemented is explained below. The controlling unit 20 is implemented by writing a program performing an operation shown in FIG.30, and having a general CPU to execute the program. The operation performed by the controlling unit 20 is explained by referring to FIG.30.

FIG.31 is a flowchart showing the process of loading operation of functional segment. In the flowchart, SegmentK is a variable indicating each of Segments (PCS, WDS, PDS, and ODS) that is read out in reproducing the AVClip. An ignore flag is a flag to determine if the SegmentK is ignored or loaded. The flowchart has a loop structure, in which first the ignore flag is initialized to 0 and then Steps S21-S24

and Steps S27-S31 are repeated for each SegmentK (Step S25 and Step S26).

Step S21 is to judge if the SegmentK is the PCS, and if the SegmentK is the PCS, judgments in Step S27 and Step
5 S28 are performed.

Step S22 is to judge if the ignore flag is 0. If the ignore flag is 0, the operation moves to Step S23, and if the ignore flag is 1, the operation moves to Step S24. If the ignore flag is 0 (Yes in Step S22), the SegmentK is loaded
10 to the Coded Data Buffer 13 in Step S23.

If the ignore flag is 1 (No in Step S22), the SegmentK is ignored in Step S24. By this, the rest of all functional segments that belong to the DS are ignored because Step S22 is No (Step S24).

15 As explained above, whether the SegmentK is ignored or loaded is determined by the ignore flag. Steps S27-S31, S34, and S35 are steps for setting the ignore flag.

In Step S27, it is judged if segmet_type of the SegmentK is the Acquisition Point. If the SegmentK is the Acquisition
20 Point, the operation moves to Step S28, and if the SegmentK is either the Epoch Start or Normal Case, then the operation moves to Step S31.

In Step S28, it is judged if a preceding DS exists in any of the buffers in the Graphics Decoder 12 (the coded data
25 buffer 13, stream graphics processor 14, object buffer 15, and composition buffer 16). The judgment in Step S28 is made when the judgment in Step S27 is Yes. A case in which a preceding DS does not exist in the Graphics Decoder 12 indicates a case in which the skip operation is performed. In this case, the

object_cropping_vertical_position (Step S59). By repeating the above operations, more than one Graphics Object is rendered in the Window.

In Step S44, it is judged if the current reproducing point is at the PTS of the PDS. If the judging is that the current reproducing point is at the PTS of the PDS, then it is judged if pallet_update_flag is one or not in Step S60. If the judging is one, the PDS indicated by pallet_id is set in the CLUT unit (Step S61). If the judging is 0, then Step S61 is skipped.

After that, the CLUT unit performs the color conversion of the Graphics Object on the Graphics Plane 8 to be combined with the moving picture (Step S62).

Next, by referring to FIG.37, Step S43 and Steps S64-S66 are explained below.

In Step 43, it is judged if the current reproducing point is at the PTS of the ODS. If the judging is that the current reproducing point is at the PTS of the ODS, then it is judged if the number of the Window is two or not in Step S63. If the judging is one, the operation returns to the main routine. If the judging is two, operations in Steps S64-S66 are performed. In Step S64, it is judged if object_crop_flag indicates 0. If it indicates 0, then the Graphics is not displayed (Step S65).

If it doesn't indicate 0 then a cropped object based on object_cropping_horizontal_position, object_cropping_vertical_position, cropping_width, and cropping_height is written to the Window in the Graphics Plane 8 at the position indicated by object_cropping_horizontal_position and

object_cropping_vertical_position (Step S66). By repeating the above operations, the Graphics Object is rendered in each Window.

The above explanations are about the DTS and PTS of the PCS, and the DTS and PTS of the ODS that belong to DS_n. The DTS and PTS of the PDS, and the DTS and PTS of the END are not explained. First, the DTS and PTS of the PD that belongs to the DS_n are explained.

As for the PDS that belongs to the DS_n, it is sufficient if the PDS is available in the CLUT unit 9 by the PCS is loaded to the Composition Buffer 16 (DTS(DS_n[PCS])) after decoding start point of a first ODS (DTS(DS_n[ODS1])). Accordingly, a value of PTS of each PDS (PDS1-PDSlast) in the DS_n is required to be set so as to satisfy the following relations.

$$\begin{aligned} & \text{DTS}(\text{DS}_n[\text{PCS}]) \leq \text{PTS}(\text{DS}_n[\text{PDS1}]) \\ & \text{PTS}(\text{DS}_n[\text{PDS}_j]) \leq \text{PTS}(\text{DS}_n[\text{PDS}_{j+1}]) \leq \text{PTS}(\text{DS}_n[\text{PDSlast}]) \\ & \text{PTS}(\text{DS}_n[\text{PDSlast}]) \leq \text{DTS}(\text{DS}_n[\text{ODS1}]) \end{aligned}$$

Note that the DTS of the PDS is not referred to during the reproducing, the DTS of the ODS is set to the same value as the PTS of the PDS in order to satisfy the MPEG2 standard.

Following is an explanation about roles of the DTS and PTS in the pipeline processing of the reproduction apparatus when the DTS and PDS are set so as to satisfy the above relations. FIG.38 illustrates the pipeline of the reproduction apparatus based on the PTS of the PDS. FIG.38 is based on FIG.26. A first row in FIG.38 indicates setting the ODS in the CLUT unit 9. Under the first row are the same as first to fifth rows in FIG.26. The setting of PDS1-last in the CLUT unit 9 is performed simultaneously with the start of the ODS1

decoding (arrows up2, up3). (The setting of the PDS1-PDSlast to the CLUT unit 9 is performed after the transferring the PCS and WDS and before the decoding of the ODS1, and accordingly the setting of the PDS1-PDSlast to the CLUT unit 9 is set
 5 before a point indicated by the DTS of the ODS1 as shown by arrows up2 and up3.)

As described above, the setting of the PDS is performed in prior to the decoding of the ODS.

Next, a setting of the PTS of END of Display Set segment
 10 in the DS_n is explained. The END that belongs to the DS_n indicates the end of the DS_n, and accordingly it is necessary that the PTS of the END indicates the decode ending time of the ODS2. The decode ending time is indicated by the PTS(PTS(DS_n[ODSlast])) of the ODS2(ODSlast), and therefore
 15 the PTS of the END is required to be set at a value that satisfies an equation below.

$$\text{PTS}(\text{DS}_n[\text{END}]) = \text{PTS}(\text{DS}_n[\text{ODSlast}])$$

In terms of a relation between the DS_n and the PCS that belongs to the DS_{n+1}, the PCS in the DS_n is loaded to the
 20 Composition Buffer 16 before a loading time of the first ODS (ODS1), and therefore the PTS of the END should be after a loading time of the PCS in the DS_n and before a loading time of the PCS that belongs to the DS_{n+1}. Accordingly, the PTS of the END is required to satisfy a relation below.

$$\text{DTS}(\text{DS}_n[\text{PCS}]) \leq \text{PTS}(\text{DS}_n[\text{END}]) \leq \text{DTS}(\text{DS}_{n+1}[\text{PCS}])$$

On the other hand, the loading time of the first ODS (ODS1) is before a loading time of a last PDS (PDSlast), and therefore the PTS of the END (PTS(DS_n[END])) should be after a loading time of the PDS that belongs to the DS_n

(PTS(DSn[PDSlast]))). Accordingly, the PTS of the END is required to satisfy a relation below.

$$\text{PTS}(\text{DSn}[\text{PDSlast}]) \leq \text{PTS}(\text{DSn}[\text{END}])$$

Following is an explanation about significance of the
5 PTS of the END in the pipeline processing of the reproduction
apparatus. FIG.39 is a diagram describes the significance
of the END in the pipeline process of the reproduction apparatus.
FIG.39 is based on FIG.28, and each row in FIG.39 is
substantially the same as FIG.28 other than that a first row
10 in FIG.39 indicates the content of the Composition Buffer
16. Further, in FIG.39, 2 Display Sets, DSn and DSn+1 are
illustrated. The ODSlast in the DSn is the last ODSn of A-ODSs,
and accordingly, the point indicated by the PTS of the END
is before the DTS of the PCS in the DSn+1.

15 By the PTS of the END, it is possible to find when the
loading of the ODS in the DSn is completed during reproduction.

Note that although the DTS of the END is not referred
to during reproduction, the DTS of the END is set to the same
value as the PTS of the END in order to satisfy the MPEG2
20 standard.

As described in the above, a part of the Graphics Plane
is specified as the Window for displaying the Graphics
according to the present embodiment, and therefore the
reproduction apparatus does not have to render the Graphics
25 for an entire Plane. The reproduction apparatus may render
the Graphics for only a predetermined size of Window, 25%
to 33% of the Graphics Plane, for example. Because the
rendering of the Graphics other than the Graphics in the Window
is not necessary, the load for software in the reproduction

apparatus decreases.

Even in a worst case in which the updating of the Graphics is performed 1/4 of the Graphics Plane, for example, it is possible to display the Graphics synchronously with the picture by the reproduction apparatus performing the write
5 to the Graphics Plane at a predetermined transfer rate such as 256 Mbps, and by setting the size of the Window so as to ensure the sync display with the picture.

Thus, it is possible to realize a high resolution subtitle display for various reproduction apparatuses,
10 because the sync display is easily ensured.

(Second Embodiment)

The First Embodiment explained above is for graphics dedicated for subtitle display. On the contrary, a Second
15 Embodiment is on graphics for interactive display.

Among the embodiments of a recording medium according to the present invention, an example of use of the recording medium is explained as follows. Just as in the First
20 Embodiment, the recording medium of the Second Embodiment can also be manufactured by an improvement in an application layer of a BD-ROM. FIG.41 is a diagram schematically illustrating a structure of the AVClip of the second embodiment.

25 The AVClip (shown in the middle) is structured in a following manner. The videostream made of plural video frames (picture pj1, pj2, and pj3), and the audio stream made of

plural audio frames (top row of the drawing) are respectively converted into a line of PES packets (second row of the drawing), and then into a line of TS packets (third row of the drawing). The interactive graphics stream (bottom row of the drawing) is converted into a line of PES packets (second to bottom row of the drawing), and then into a line of TS packets (third to bottom row of the drawing). The three lines of TS packets are multiplexed, and thus the AVClip is constituted.

Next, the interactive graphics stream is explained.

10 The interactive graphics stream has an Interactive Composition Segment (ICS) instead of PCS, and does not have WDS. The interactive graphics stream is similar to the presentation graphics stream, in that it has functional segments named a Palette Definition Segment (PDS), an Object

15 Definition Segment (ODS), and an END of Display Set Segment (END).

Disposition of GUI parts on a screen generates an interactive screen that is defined by the functional segments. FIG. 42A is a diagram illustrating such an interactive screen

20 realized by the interactive graphics stream. This interactive screen includes four GUI parts called buttons A-buttons D. Interactivity by means of interactive graphics stream means changing the state of these GUI parts (i.e. buttons) according to user operations. The state of the GUI

25 parts (buttons) includes "normal state bt1", "selected state

bt2", and "active state bt3", which are shown in FIG.42A. The normal state is a state in which mere display is provided. As opposed to this, the selected state is a state in which a focus is given according to a user operation, but confirmation has not been received. The active state is a state in which confirmation is received. The button state can be changed by push directed to the keys of the remote controller 400, which is shown in the First Embodiment.

FIG.42B is a diagram illustrating the keys of the remote controller 400, through which a user operation directed to the interactive screen is received. As shown in this drawing, the remote controller 400 is provided with MoveUp key, MoveDown key, MoveRight key, and MoveLeft key.

The MoveUp key is for, when a button in the interactive screen is in a selected state, setting a button above this selected button, to be in a selected state. The MoveDown key is for setting a button below this selected button to be in a selected state. The MoveRight key is for setting a key on the right of the selected key to be in a selected state, and the MoveLeft key is for setting a key on the left of the selected key to be in a selected state.

The Activated key is for setting the selected button to be in an active state (i.e. to activate. Numerical keys "0"-"9" are for setting a button to which a corresponding number is assigned, to be in a selected state. "+10" key is

for receiving an operation to add 10 to the already inputted numerical values. It should be noted here that "0" key and "+10" key are both for receiving input of numerical value of no smaller than 10 digits. Therefore any one of them is
5 enough for the remote controller 400.

Each state (i.e. normal state, selected state, and active state) is made of plural graphics in decompressed state. Each decompressed graphics, which is for representing each state of the buttons, is named "Graphics Object". The reason why
10 one state of a button is represented by plural decompressed graphics is to take it into consideration to perform animation display for every state of each button.

Next, the improvements directed to the definition segments (ODS, PDS) in the present embodiment are explained.
15 ODS and PDS have the same data structure as those of the First Embodiment. Only difference lies in the "object_ID" concerning ODS. ODS in the Second Embodiment constructs animation using plural Graphics Objects defined by plural ODSs. In constructing animation, an object_ID is added to
20 a series of ODS, where the object_ID is a serial number.

Next, ICS is explained. An Interactive Composition Segment is a functional segment constituting an interactive screen. The Interactive Composition Segment has the data structure shown in FIG.43. As shown in this drawing, ICS is
25 composed of: segment_type; segment_length;

composition_number;
composition_state; command_update_flag; composition_time_out_pts; selection_time_out_pts; UO_mask_table; animation_frame_rate_code; default_selected_button_number; default_activated_button_number; and button information sets (button info(1)(2)(3) ...).

"composition_number" represents numerical values from 0 to 15, which indicate performing of update.

"composition_state" represents the DS starting with the present ICS is Normal Case, Acquisition Point, or Epoch Start.

"command_update_flag" represents whether the button command within the present ICS has changed from the former ICS. For example, if the DS that a certain ICS belongs is Acquisition Point, this ICS will have the same content as an ICS which is just before this ICS, in principle. However, if "command_update_flag" is set to be on, a button command different from the ICS just before can be set as ICS. This flag is set to be valid when command is desired to be changed while applying Graphics Object.

"composition_time_out_pts" describes an end time of the interactive screen. At the end time, the interactive screen display is no longer valid, and so is not performed. It is desirable that composition_time_out_pts is described at a time accuracy of the reproduction timeline for the moving picture data.

"selection_time_out_pts" describes an end time of a valid button selection period. During the selection_time_out_pts, the button specified by default_activated_button_number gets activated. The period of selection_time_out_pts is equal to, or shorter than the period of composition_time_out_pts. Selection_time_out_pts is described at a time accuracy of the video frame.

"UO_mask_table" represents permission/prohibition of user operation for Display Set that corresponds to the ICS. If this mask field is set as prohibition, use operation directed to the reproduction apparatus will be invalid.

"animation_frame_rate_code" describes a frame rate to be applied to the animation-type button. An animation frame rate is obtained by dividing the video frame rate by a value in this field. If the value in this field is "00", only the ODS specified by start_object_id_xxx is displayed, and not animation, the ODS being among the ODSs defining Graphics Objects for the buttons.

"default_selected_button_number" indicates a button number that should be set in a selected state as a default, when an interactive screen display has started. If this field is "0", a button having the button number stored in the register of the reproduction apparatus will be automatically set to be in an active state. If this field is not "0", it means

that this field indicates a valid value of button.

"default_activated_button_number" represents a button to be automatically set in an active state, when the user did not set any button to be in an active state prior to the
5 time defined by selection_time_out_pts. If default_activated_button_number is "FF", the button currently in a selected state, at the time defined by selection_time_out_pts, will be automatically selected. If this default_activated_button_number is "00", the automatic
10 selection will not be performed. If it is other than "00" and "FF", this field will be interpreted as indicating a valid button number.

Button information (button_info) defines each button composed at the interactive screen. A leader line in this
15 drawing focuses the internal structure of button information *i*, which is about the *i*th button that the ICS controls. The following explains the information elements constituting the button information *i*.

"button_number" is a value uniquely identifying the
20 button *i*, at the ICS.

"numerically_selectable_flag" indicates whether to permit the numerical value selection for the button *i*.

"auto_action_flag" indicates whether to automatically set the button *i*. If this auto_action_flag is set to be on
25 (i.e. bit value of 1), the button *i* will be set in an active

corresponding to this ID in the Graphics Object will be the image for the button *i*.

"repeat_selected_flag" indicates whether to repeatedly continue the animation display for the button *i* in the selected state. If start_object_id_selected and end_object_id_selected have the same value, this field will be set as 00.

"start_object_id_activated" is such a field that, when rendering the button *i* in the active state by animation, the first number among the serial numbers that are assigned to the plurality of ODSs constituting the animation is described in this start_object_id_activated.

"end_object_id_activated" is such a field that, when rendering the button in the active state by animation, the last number among the serial numbers (i.e. object_id) that are assigned to the plurality of ODSs constituting the animation is described in this end_object_id_activated.

Next, the button command is explained.

A button command (button_command) is a command to be executed when the button *i* is set in active state.

As follows, an example of interactive control by means of ICS is explained. This example assumes ODS and ICS as illustrated in FIG.44. FIG. 44 shows a relationship between the ODS included in the DS*n* and the ICS. This DS*n* is assumed to contain ODS11-19, 21-29, 31-39, and 41-49. Among these

this ODS belongs to.

More specifically, when the normal state of a button and the selected state of another button are rendered by one ODS, the thing to be considered is whether this ODS belongs to a button-state group corresponding to the normal state
5 or to a button-state group corresponding to the selected state.

In this case, the ODS is disposed only once in the button-state group that corresponds to the state that appears earliest.

10 If a certain ODS is used in multiple-referring in both of the normal state and in the selected state, this ODS will be disposed in the button-state group corresponding to the normal state (N-ODSs), and not in the button-state group corresponding to the selected state (S-ODSs). In addition,
15 if another ODS is used in multiple-referring in both of the selected state and in the active state, this ODS will be disposed in the button-state group corresponding to the selected state (S-ODSs), and not in the button-state group corresponding to the active state (A-ODSs). In sum, ODSs in
20 such a multiple-referring method will be disposed only once within the button-state group corresponding to the earliest appearing state.

Next, the order of ODSs in S-ODSs is explained. In S-ODSs, which ODS comes first depends on whether the default selected
25 button is determined statically, or it is dynamic. The default

Next, the following explains how Display Set having these ICS and ODS is disposed on the reproduction timeline for AVClip. DTS and PTS of ODS can be set based on the expressions shown in the first embodiment. On the contrary, DTS and PTS of ICS
5 will be different from those shown in the first embodiment. The following explains the values for DTS and PTS of ICS.

When immediately after Epoch start, PTS in ICS will be set as an equal to or greater value than the value resulting from summing (1) PTS value of the ODS whose decode time is
10 the last among the ODSs constituting the initial display of DSn, (2) time required to clear the Graphics Plane, and (3) write time for writing the Graphics Object obtained by ODS decoding to the Graphics Plane. On the other hand, when at Acquisition Point, it will be set to be equal to or greater
15 than the value obtained by adding (3) the plane write period to (1) PTS value of ODS.

When default_selected_button_number is indicated in ICS, the initial display can be performed as long as i) ODS decoding for rendering the normal state of all the buttons
20 and ii) ODS decoding for rendering the selected state of the default button. The ODSs for rendering the selected state of plural buttons at the initial display are called S-ODSs, and the ODS whose decoding time comes first among the ODSs (in this case, the ODS for rendering the default button) is
25 called S-ODSsfirst. The PTS value of this S-ODSsfirst is set

as the PTS value of the ODS whose decoding time comes last, and is used as a reference value of PTS in ICS.

When default_selected_button_number is not indicated in ICS, any button can be in selected state. Therefore
5 preparation for the initial display will not be complete until preparation for rendering the normal state and the selected state for all the buttons. Among the S-ODSs for rendering the selected state of the plural buttons at the initial display, the one whose decoding time comes last is called S-ODSslast.
10 The PTS value for this S-ODSslast is set as the PTS value of the ODS whose decoding time comes last, and is used as a reference value of PTS in ICS.

If the ending time for decoding the S-ODSsfirst is assumed to be $PTS(DSn[S-ODSsfirst])$, $PTS(DSn[ICS])$ will be
15 a value resulting from adding, to $PTS(DSn[S-ODSsfirst])$, (2) the time required for clearing the Graphics Plane, and (3) write time for writing the Graphics Object obtained from ODS decoding to the Graphics Plane.

Assume here that, within the Graphics Plane, the width
20 and the height of a rectangular area for rendering picture are respectively defined as "video-width" and "video-height", and that the rate of writing to the Graphics Plane is 128Mbps. Then the time required for clearing the Graphics Plane is expressed as " $8 * \text{video_width} * \text{video_height} // 128,000,000$ ".
25 When this is expressed in time accuracy of 90 KHz, the clearing

time (2) of the Graphics Plane will be $90,000 * (8 * \text{video_width} * \text{video_height} // 128,000,000)$.

In addition, assume here that the total size of the Graphics Objects specified by all the button information included in ICS is $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$, and that the rate of writing to the Graphics Plane is 128Mbps, then the time required for writing to the Graphics Plane is expressed as $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]]) // 128,000,000$. If this is expressed in time accuracy of 90 KHz, the clearing time (2) of the Graphics Plane is $90,000 * (\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])) // 128,000,000$.

Here, $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ is the total size of the firstly-displayed Graphics Object, among the Graphics Objects representing all the buttons. This $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ will yield a different value, in a case where the default selected button has already determined, from in a case where the default selected button changes dynamically. When the default selected button has been statically determined, $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ will be a total of 1) the firstly-displayed ODS among the plural ODSs for representing the selected state of the default selected button, and 2) the firstly-displayed ODS among the plural ODSs for representing the normal state of the buttons except the default selected button.

On the contrary, when the default selected button changes

dynamically, it should assume the case where the write time is the longest, because it is hard to know which button will be the default selected button. In this case, it is considered that the Graphics Object to be firstly displayed is the Graphics
 5 Object having the largest size ($\text{Max}(\text{ODSn1.ODSs1})$ among 1) the Graphics Objects representing the first page in the normal state of an arbitrary button x (ODSn1), and 2) the Graphics Objects representing the first page in the selected state of the button x (ODSs1).

10 The result of summing this $\text{Max}(\text{ODSn1,ODSs1})$ of reach button will be $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$.

FIGs. 54A, 54B illustrate which values $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ takes, in a case where N-ODSs includes plural ODSs constituting the buttons A-D, and where
 15 S-ODSs includes plural ODSs constituting the buttons A-D. Here, when `default_selected_button_number` indicates a valid value, $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ will be the total size for the four ODSs shown by the frame in thick line. "As1" is the ODS firstly displayed among the plural ODSs representing the
 20 selected state of the button A. "Bn1", "Cn1", and "Dn1" represent the corresponding ODSs firstly displayed among the plural ODSs representing the normal states of the button B-the button D. When these sizes are expressed in `size()`, $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ will be:

25 $\text{size}(\text{As1}) + \text{size}(\text{Bn1}) + \text{size}(\text{Cn1}) + \text{size}(\text{Dn1})$.

On the other hand, when default_selected_button_number is "=0", $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ will be:

Greater ODS of An1,As1 + Greater ODS of Bn1,Bs1 + Greater ODS of Cn1,Cs1, + Greater ODS of Dn1,Ds1.

5 Therefore $\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])$ is expressed as follows.

$$\begin{aligned} & \sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]]) \\ & = \max(\text{size}(\text{Cn1}), \text{size}(\text{Cs1})) + \max(\text{size}(\text{Dn1}), \text{size}(\text{Ds1})) \end{aligned}$$

10 Using the above-stated expression, $\text{PTS}(\text{DSn}[\text{ICS}])$ immediately after the starting of Epoch Start is expressed as follows.

$$\begin{aligned} & \text{PTS}(\text{DSn}[\text{ICS}]) \geq \text{PTS}(\text{DSn}[\text{S-ODSsfirst}]) \\ & + 90,000 * (8 * \text{video_width} * \text{video_height} // 128,000,000) \\ 15 & + 90,000 * (\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]]) // 128,000,000) \end{aligned}$$

An example of realizing sync display, by setting PTS and DTS as above, is shown in FIG. 55. This drawing assumes a case where the button is displayed at the display timing
20 of any picture data p1 in the moving picture. In such a case, the PTS value in ICS should be set so as to coincide with the display time-point of the corresponding picture data.

In addition, the PTS value in ODS should be set at the time-point(1) of this drawing, because, by the time obtained
25 by subtracting, from the PTS in ICS, the clearing period of

the screen "cd1" and the transfer period of the Graphics Object "td1", decoding of the ODS whose decoding time comes last among the ODSs that constitute the initial display of DS_n, should be complete. Furthermore, because decoding of ODS
5 requires the period of dd1, the DTS value of ODS should be set prior to this PTS by the period of dd1.

FIG.55 has only one ODS to be combined with a moving picture, which is a simplified example. In order to realize the initial display of the interactive screen to be combined
10 with the moving picture among the plural ODSs, the PTS and DTS in ICS, and PTS, DTS in ODS should be set as shown in FIG.56.

FIG. 56 shows how DTS and PTS are set in a case where the initial display of the interactive screen is constituted
15 by plural ODSs, and where the default selected button is statically determined. If decoding for the S-ODSs first whose decoding is performed the last, among the ODSs for realizing the initial display, will end during the period dd1 of this drawing, PTS(DS_n[S-ODSsfirst]) of this S-ODSsfirst should
20 be set to indicate the time of the period dd1.

Furthermore, before initial display, screen clearing and transferring of already decoded Graphics Objects should be performed. Therefore PTS(DS_n[ICS]) of ICS should be set to be after the time obtained by adding, to the value of this
25 PTS(DS_n[S-ODSsfirst]), the period required for screen

clearing

$(90,000 * (8 * \text{video_width} * \text{video_height} // 128,000,000))$ and the transfer period of the decoded Graphics Object $(90,000 * (\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])) // 128,000,000))$.

5 FIG.57 shows how DTS and PTS are set in a case where the initial display of the interactive screen is constituted by plural ODSs, and where the default selected button is not determined. If decoding for the S-ODSs last whose decoding is performed the last, among the ODSs for realizing the initial
10 display, will end during the period dd2 of this drawing, $\text{PTS}(\text{DSn}[\text{S-ODSs last}])$ of this S-ODSs last should be set to indicate the time of the period dd2.

Furthermore, before initial display, screen clearing and transferring of already decoded Graphics Objects should
15 be performed. Therefore $\text{PTS}(\text{DSn}[\text{ICS}])$ of ICS should be set to be after the time obtained by adding, to the value of this $\text{PTS}(\text{DSn}[\text{S-ODSs last}])$, the period required for screen clearing $(90,000 * (8 * \text{video_width} * \text{video_height} // 128,000,000))$ and the transfer period of the decoded Graphics Object
20 $(90,000 * (\sum \text{SIZE}(\text{DSn}[\text{ICS.BUTTON}[i]])) // 128,000,000))$.

It should be noted here that the sync control by means of PTS in ICS, stated above, includes not only control to display the button at a certain timing on the reproduction timeline, but also include the control to enable the display
25 of Popup menu during a certain period on the reproduction

timeline. The Popup menu is a menu displayed, as a popup, by a push directed to the menu key provided for the remote controller 400. The sync control by means of PTS in ICS also includes enabling this Popup display at the display timing of certain picture data in the AVClip. The ODSs constituting this Popup menu are decoded first and then written to the Graphics Plane, just as the ODSs constituting a button. Unless the writing to the Graphics Plane has been complete, it is impossible to answer the menu call by a user. In view of this, The time at which the Popup display becomes possible is written to PTS in ICS, at the sync display of the Popup menu.

Following the explanation on the recording medium of the present invention stated above, a reproduction apparatus according to the present invention is explained as follows. The internal structure of the reproduction apparatus according to the second embodiment is substantially the same as that of the first embodiment, except some improvements for the Object Buffer 15, and for the Graphics controller 17. Therefore the improvements for the Object Buffer 15, and for the Graphics controller 17 are detailed as follows.

Graphics objects that are obtained by the decoding performed by the Stream Graphics processor 14 and that are for constituting an interactive screen are disposed in the Object Buffer 15 according to the second embodiment. FIG.58 illustrates the content of the Object Buffer 15 in comparison

with the Graphics Plane 8. The content of the Object Buffer 15 assumes a case in which the ODS shown in FIG.48 and FIG.49 are written to the Object Buffer 15. The examples of FIG.48 and FIG.49 realizes the four-button animation by 36 ODS (ODS11-ODS49), where the ODS representing all the frames of this animation are stored in this Object Buffer 15, and the display position of each of the ODSs stored in this Object Buffer 15 is defined in the Graphics Plane 8. This display position is defined by Button_horizontal_position and 10 Button_vertical_position of the corresponding button information. Animation is realized by writing the plural ODSs stored in the Object Buffer 15 to a corresponding display position of the Graphics Plane 8, by transferring one frame at a time.

15 The Graphics controller 17 of the second embodiment interprets the ICS disposed unit the Composition buffer 16, and executes control based on the ICS. The execution timing of this control is based on the value of PTS assigned to the ICS. The important task of this Graphics controller 17 is 20 a writing operation at the initial display time of the interactive screen, and at the update time. The following describes, with reference to FIG.59, the writing operation at the initial display time of the interactive screen and at the update time. FIG.59 illustrates the operation 25 performed by the Graphics controller at the initial display

time. As this diagram shows, the Graphics controller 17 performs control so that the ODSs belonging to S-ODSs of the button A are written to the display position defined by Button_horizontal_position and Button_vertical_position of the button information at the button A; and similarly, the ODSs belonging to the N-ODSs of the buttons B, C, D are written to the respective display positions defined by the corresponding Button_horizontal_position and Button_vertical_position of the button information of the buttons B, C, and D. Note here that the arrows w1, w2, w3, and w4 symbolically show the aforementioned writing. By performing the writing, the initial display shown in FIG. 51 will be performed. What should be noted here is that not all the ODSs are necessary for realizing the initial display of the interactive screen, and as long as the Object Buffer 15 contains the ODSs belonging to S-ODSs of the default selected button and the ODSs belonging to N-ODSs of the other buttons, it is enough for completing the initial display of the interactive screen. Therefore when the ODSs belonging to S-ODSs of the default selected button and the ODSs belonging to N-ODSs of the other buttons have been decoded, it can be said to be ready for the Graphics controller 17 to start performing writing for the initial display of the interactive screen.

FIG.60 illustrates the operation performed by the

Graphics controller 17 when the interactive-screen update is performed according to 1stUserAction(MoveRight). As this drawing shows, the Graphics controller 17 performs control so that the ODS belonging to S-ODSs of the button B is written to the display position defined by Button_horizontal_position and Button_vertical_position of the button information at the button B; and similarly, the ODSs belonging to the N-ODSs of the button A are written to the display position defined by Button_horizontal_position and Button_vertical_position of the button information of the button A. Note here that the arrows w5, w6, w7, and w8 symbolically show the aforementioned writing. By performing the writing, the state change shown in FIG. 51 will be realized. The buttons C and D are in the normal state, just as in the initial display time, but the writing to the Graphics Plane 8 is being continually performed therefor, so as to continue the animation.

In the similar manner as above, FIGs. 61 and 62 illustrate the operations performed by the Graphics controller 17, at the interactive screen update when the 1stUserAction is "MoveDown" and "Activated". At the interactive screen update time, The S-ODSs and the A-ODSs of the buttons other than the default selected button, and so it is desired that all the ODSs have been stored in the Object Buffer 15.

In the reproduction apparatus, constructed as in the

above, each component performs decoding operations in pipeline processing method, Just as in the first embodiment.

FIG.63 is a timing chart illustrating a pipeline processing performed by the reproduction apparatus. The fourth row shows the Display Set of BD-ROM, and the third row shows reading periods of ICS, PDS, ODS to the Coded Data buffer 13. The second row shows decode periods of ODSs, where the decoding is performed by the Stream Graphics processor 14. The first row shows operation periods of the Graphics controller 17. The decoding start time for the ODSs are shown by DTS11, DTS12, and DTS 13, respectively. The storing, to the Coded Data buffer 13, of the first ODS (N-ODSs[ODS1]) among those belonging to N-ODSs will be complete by the DTS11. The storing, to the Coded Data buffer 13, of the last ODS (N=ODSs[ODSn]) among those belonging to the N-ODSs, will be complete by the DTS12. Asu such, each ODS will have been read to the Coded Data buffer 13 by the time shown by its own DTS.

On the other hand, the decode end time of each ODS is shown by PTS11, PTS12, and PTS13 of the drawing. The decoding of N-ODSs(ODS1) performed by the Stream Graphics processor 14 will be complete by PTS11; and the decoding of N-ODSs(ODSn) will be complete by PTS12. As such, by the time shown by the DTS of each ODS, the ODS has been read to the Coded Data buffer 13, and each read ODS to the Coded Data buffer 13 will be

decoded and written to the Object Buffer 15 by the time shown by the PTS shown by the corresponding PTS. The Stream Graphics processor 14 performs these series of operation, in pipeline processing method.

5 When the default selected button is determined statically, all the Graphics Objects necessary for the initial display of the interactive screen will be ready on the Object Buffer 15 when the decoding is complete for 1) the button-state group corresponding to the normal state, and 2) the first
10 ODS of the button-state group corresponding to the selected state. In this drawing, at the time shown by PTS13, all the Graphics Objects necessary for the initial display of the interactive screen get ready.

In this drawing, the period *cd1* in the first row is the
15 period necessary for clearing the Graphics Plane 8. In addition, the period *td1* is the period necessary for writing, to the Graphics Plane 8, the Graphics Objects constituting the first page of the interactive screen, which are among the Graphics Objects obtained on the Object Buffer 15. The
20 exact storing place of the Graphics Objects in the Graphics Plane 8 is the place shown by *button_horizontal_position* and *button_vertical_position*. In other words, *cd1* (screen clearing period) *td1* (writing period of the Graphics Object having been decoded) are added to PTS13 of ODS, decompressed
25 graphics constituting the interactive screen will be obtained

on the Graphics Plane 8 in the obtained period. Then, by 1) making the CULT unit 9 perform a color conversion of decompressed graphics, and 2) making the adding unit 10 combine the decompressed picture stored in the video plane 6, the composition image will be obtained.

As opposed to the case where the initial display is performed after decoding all the ODSs included in the Display Set, it becomes possible, in the above-stated case, to perform an initial display regardless of whether decoding of a button-state group corresponding to the selected state has been complete, or whether decoding of a button-state group corresponding to the active state has been complete. Therefore the initial display will be performed earlier in this case by the period hyl in the drawing.

It should be noted, in this drawing, every set of ODS1-ODSn is assigned the same number, such as 1 and n. However, the sets are different from one another, and belong to N-ODSs, S-ODSs, and A-ODSs, respectively. This also applies to every similar drawing hereinafter.

In the graphics decoder 12, even while the Graphics controller 17 continues executing clearing of the Graphics Plane 8 or writing to the Graphics Plane 8, the Stream Graphics processor 14 continues performing decoding (decode period of ODSn, decode period of ODS1, and decode period n of ODSn, in the second row). Therefore, it becomes possible to finish

decoding of the other ODSs than those being treated by the Graphics controller 17, earlier than conventionally, since the other ODSs will be decoded simultaneously with the decoding of ODSs being treated by the Graphics controller 17. Since
5 it becomes possible to have preparation for updating the interactive screen early by completing the decoding of the other ODSs, the interactive screen update, which will use the other ODSs, will be accordingly finish earlier than conventionally. The aforementioned pipeline processing
10 enables both the initial display of the interactive screen and the updating thereof, to be performed without delay.

FIG. 63 assumes the case where the default selected button has been statically determined. On the contrary, FIG. 64 is a timing chart illustrating a pipeline processing by the
15 reproduction apparatus in a case where the default selected button changes dynamically. When the default selected button changes dynamically, the Graphics Objects necessary for the initial display will be ready, when all the ODSs belonging to the button-state group have been decoded and the Graphics
20 Objects are obtained in the Graphics Plane. As opposed to the case where the initial display is performed after decoding all the ODSs included in the button-state group corresponding to the active state, the above-stated case enables the initial display to be performed regardless of whether decoding of
25 the button-state group corresponding to the active state has

been complete. Therefore, the initial display will be performed earlier in this case by the period hy_2 in the drawing.

FIG.65 is a timing chart illustrating chronological transitions in occupancy of the Graphics Plane 8, the Object Buffer 15, the Coded Data buffer 13, and the Composition buffer 16. The notations of occupancy used in this drawing conform to those used in FIG.30. Since the ODSs constituting N-ODSs, S-ODSs, A-ODSs are to be decoded in the second embodiment, the number of simply increasing parts and of simply decreasing parts is more than in FIG.30. Except for this difference, FIG.65 is the same as FIG.30. Just as in the first embodiment, the graphs for example in FIG.65 are illustrated using: DTS and PTS assigned to ODS; DTS and PTS assigned to ICS; size and transfer rate of each buffer illustrated in FIG.27. Furthermore, by creating such graphs, users can know how the state of each buffer changes, at the authoring stage. Since the transition of the state of each buffer can be adjusted by updating DTS and PTS, it becomes possible, also in this embodiment, to avoid generation of decoding load which would exceed the specification of the decoder at the side of the reproduction apparatus, and to avoid buffer overflow incident to reproduction. According to this, the hardware/software implementation will become easy, in the developing phase of reproduction apparatuses.

Next, software improvement necessary for realizing the

reproduction apparatus of the second embodiment is explained.

FIG.66 is a flowchart showing the process of loading operation of functional segment. This drawing is drawn based on the flowchart of FIG.31. The difference is that, after
5 Step S29, Steps S36 and S67 are added to FIG.66.

Step S36 is to judge whether `command_update_flag` is 1. If it is 1 (Step S36:Yes), only button command in the button information is loaded to the Coded Data buffer 13, and the others are ignored (Step S37). If it is 0, the control is
10 moved to Step S22, thereby ignoring the ICS representing Acquisition Point (Step S24).

Next, assuming the case where multiplexing is performed as in FIG.67, the following explains how DS is read out. The example of FIG.67 multiplexes three DS with a moving picture.
15 Among the three DS, the first DS1 has `Epoch_Start` as `Composition_state`, includes a button command called `LinkPL(PL#5)`, and whose `Command_update_flag` is set as 0.

DS10 is "Duplicate" of DS1, and has Acquisition Point as `Composition_state`, includes a button command called
20 `LinkPL(PL#5)`, and whose `Command_update_flag` is set as 0.

DS20 is "Inherit" of DS1, and has Acquisition Point as `Composition_state`. The difference from DS1 is the button command (`LinkPL(PL#10)`), and so as to representing this, its `Command_update_flag` is set as 1.

25 Assume here that these three DS and the moving picture

are multiplexed in an AVClip, and a skip operation to a picture data pt10 of ms1 is performed. In this case, the DS10 which is closest to a skipping target is the target of FIG.66. At Step S27, composition_state will be judged to be Acquisition Point, but no preceding DS exist in the graphics decoder 12. Therefore the ignore flag is set as 0, and this DS10 is loaded to the Coded Data buffer 13 of the reproduction apparatus (hs1 of FIG.68). On the other hand, when the target of a skip operation falls after the position at which Display Set exists (ms2), Display Set 20 (hs2 of FIG.68) will be read to the Coded Data buffer 13.

FIG.70 shows loading of DS1, DS10, and DS20, in a normal reproduction as performed in FIG.69. Among the three DS, DS1 whose Composition_state of ICS is Epoch Start is loaded to the Coded Data buffer 13, as it is (Step S23). However, DS10, whose Composition_state of ICS is Acquisition Point, has the ignore flag of 1 (Step S29). Therefore the functional segments constituting DS10 will not be loaded to the Coded Data buffer 13, and will be ignored instead (Step S24). Furthermore, as for DS20, it is true that its Composition_state of ICS is Acquisition Point, but its Command_update_flag is set as 1. Therefore Step S36 yields "Yes", and so only button command thereof is loaded, and only the button command of ICS of DS on the Coded Data buffer 13 is replaced with the button command of DS20 (Step S37). However, the ignore flag still represents

1, and so the others different from this button command will not be loaded, and ignored instead.

When reaching DS20, the display content stays the same, however the button command has changed from LinkPL(#5) of DS, to LinkPL(#19). Such replacement of button command enables control of changing the contents of a button command. Next, the processing performed by the Graphics controller is explained. FIG.71 is a flowchart illustrating the main routine of the processing performed by the Graphics controller 17. In this flowchart, the following three operations are repeatedly executed: time stamp sync operation (Step S35), animation display operation (Step S36), and UP operation (Step S37).

Here, the processing performed by the Graphics controller 17 is explained. The processing performed by the Graphics controller 17 is greatly changed from what are shown in FIGs.36-38, to what are shown in FIGs.71-78. FIG.71 is a flowchart illustrating the main routine of the processing performed by the Graphics controller 17. FIG.72 is a flowchart illustrating the processing for realizing sync control that uses time stamp. In this flowchart, judgment is performed as to any of the conditions of Steps S41, S43-S47 holds. If any of the conditions holds, a corresponding operation is performed, and then goes back to the main routine. The stated processing is a subroutine.

Step S41 is to judge whether the current reproducing point is one of the time represented by the PTS of the S-ODSsfirst, and the time represented by the PTS of the S-ODSslast. If the current reproducing point is judged to
5 be one of the stated times, the period α thereof is calculated. The period α is obtained by summation of (2) period required for clearing a GraphicsPlane, and (1) period required for writing the Graphics Object obtained by ODS decoding, to the Graphics Plane.

10 At Step S42, the Graphics controller 17 refers to Composition_state in ICS, and a) if Composition_state is Epoch Start, sets α to be "plane clearing period (2)+plane writing period (3)"; b) if Composition_state is Acquisition Point, sets α to be the plane writing period (3). Calculation of
15 the plane writing period (3) is performed as follows: if default_selected_button_number is a valid value, the calculating method of FIG.54A is used; and if default_selected_button_number is 0, the calculating method of FIG.54B is used. When α is calculated, the control will
20 return to a loop processing.

Step S43 is to judge whether the current reproducing point is the time represented by PTS- α in ICS. If the judgment results in affirmative, a writing operation to the Graphics Plane 8 is performed (Step S51), and the control returns to
25 the main routine.

Step S45 is to judge whether the current reproducing point is PTS in ICS. If the judgment results in affirmative, then the outputting of the contents of the Graphics Plane 8 is instructed. The destination of the contents is the CLUT unit 9. The CLUT unit 9 performs color conversion to the contents. Then the interactive screen will be combined with the contents of the video plane 9. As a result, the initial display is performed (Step S52). Then, the variable "animation(p) (p=1,2,3... n) is set to be 0 (Step S53), and the control returns to the main routine. Here, the variable animation(p) is a global variable that indicates which number of frame in the frame sequence is currently displayed, used in executing the animation display of the button(p) (a global variable is a variable that is valid throughout a plurality of flowcharts). Therefore at Step S53, button (p) of all the buttons will be set to be 0.

Step S46 and Step S47 are to judge whether the current reproducing point has reached the time information described in ICS.

Step S46 is to judge whether the current reproducing time is the time represented by selection_TimeOut_PTS, and if the judgment results in affirmative, an operation for activating the button represented by default_activated_button_number is performed, and the control returns to the main routine (Step S54).

Step S47 is to judge whether the current reproducing point is Composition_TimeOut_PTS, and if the judgment results in the affirmative, the screen is cleared, then the control returns to the main routine (Step S55). In the sync operation
5 stated above, each of the operations at Step S51 and Step S54 are performed as a subroutine. Following this, the subroutine at Step S51 is explained with reference to FIG.73.

FIG.73 is a flowchart illustrating the operation of writing the initial display of the menu, to the Graphics Plane
10 8. Step S64 is to judge whether Composition_state in ICS is Epoch Start, and if the judgment is in the affirmative, the Graphics Plane is cleared at Step S65, and the operations of Steps S66-S73 are performed. The period required for clearing the Graphics Plane 8 is the period cd1 in FIG.56
15 and FIG.57. If the judgment of Step S64 is in the negative, Step S65 is skipped, and the operations of Steps S66-S73 are performed.

Steps S66-S73 form a loop processing, which is to be repeated for each piece of button information of ICS (Step
20 S66, S67). Button information that should go through this loop processing is called button information (p).

Step S67 is to judge whether the indication by default_selected_button_number is valid or not. Step S68 is to judge whether the button_info(p) is button information
25 corresponding to the default selected button indicated by

default_selected_button_number.

If the judgment in Step S68 is in the negative, the Graphics Object of start_object_id_normal, indicated by normal_state_info of button_info(p) is found from the Object Buffer 15, and is identified as Graphics Object(p) (Step S69).

If the judgment in Step S68 is in the affirmative, the Graphics Object of start_object_id_selected, indicated by selected_state_info of button_info(p) is found from the Object Buffer 15, and is identified as Graphics Object(p) (Step S70), then the button (p) is set as the current button (Step S71). The current button is a button that has been set to be in selected state in the interactive screen currently displayed. The reproduction apparatus stores the identifier of this current button, as PSR(10).

Once the Graphics Object (p) has been identified as a result of Step S69 and Step S70, the Graphics Object (p) is written to the position on the Graphics Plane 8, which is indicated by button_horizontal_position and button_vertical_position of button_info (p) (Step S72). By repeating the above-described operations for each piece of button information, the first Graphics Object, which is among the plural graphic objects each showing the state of a corresponding button, is to be written to the Graphics Plane 8. The period required to perform the operation, which is directed to the Graphics Object that is necessary for at least

the initial display of the Object Buffer 15, is shown by the period tdl of FIG.56 and FIG.57.

When default_selected_button_number is "=0", and that the default selected button changes dynamically, Step S67 will be No, and whether the button_info(p) corresponds to the current button is judged. If the judgment of Step S67 results in the affirmative, the control goes to Step S70; and if the judgment results in negative, the control is moved to Step S69.

10 Next, the subroutine processing at Step S54 is explained, with reference to FIG.74.

FIG.74 is a flowchart illustrating the automatic activation processing for the default selected button. First, whether default_activated_button_number is 0 or FF is judged
15 (Step S75). If the judgment of Step S75 results in "00", no processing is performed and the control returns to the main routine; and if the judgment of Step S75 results in "FF", the current button *i* is changed into active state (Step S77), the variable animation (*i*) is set as 0, and the control returns
20 to the main routine (Step S78).

If the judgment of Step S75 results in neither "00" nor "FF", the button specified as default_activated_button_number is set as the current button (Step S76), the current button *i* is changed into active state
25 (Step S77), the variable animation (*i*) corresponding to the

current button *i* is set as 0, and the control returns to the main routine (Step S78).

The above-stated processing enables the button in selected state, to be changed into active state after a
5 predetermined time.

Next, the animation by means of the menu (Step S36) is explained. FIG. 75 is a flowchart showing the animation display processing.

Here, the initial display is realized by writing a
10 Graphics Object to the Graphics Plane 8, the Graphics Object having been specified by 1) start_object_id_normal of normal_state_info and 2) start_object_id_selected of selected_state_info, for each button_info. Here, "animation" is a processing to update the Graphics Plane with
15 an arbitrary frame of each button (i.e. Graphics Object of *q*th frame), every time a cycle of the loop processing of Step S35-Step S37 is completed. This update is performed by returning the main routine, by writing the Graphics Objects indicated by normal_state_info and selected_state_info of
20 button_info, one by one to the Graphics Plane 8. Here, the variable *q* is used in identifying each Graphics Object indicated by normal_state_info and selected_state_info of button_info, for each piece of button information.

The processing for realizing this animation display is
25 detailed with reference to FIG.75. This flowchart assumes

a case where repeat_normal_flag and repeat_selected_flag, of CIS, are set to indicate "repetition necessary", to simplify explanation.

Step S80 is to judge whether the initial display has
5 finished. If the judgment of Step S80 results in the negative, the control returns without performing any processing; if the judgment of Step S80 results in the affirmative, Step S81-Step S93 are performed. Step S81-Step S93 constitute a loop processing of repeating the operations of Step S83-Step
10 S93, for each button_info in ICS (Step S81, Step S82).

Step S83 is to set the variable animation(p) corresponding button_info(p), to the variable q. By performing this step, the variable q will indicate the current number of frames, which corresponds to the button_info(p).

15 Step S84 is to judge whether button_info(p) corresponds to the button currently in selected state (hereinafter "current button").

If the button_info(p) is judged other than the current button, judgment of Step S86 is performed.

20 Step S86 is to judge whether the current button is in active state, and if judging affirmatively, an identifier resulting from adding the variable q to start_object_id_actioned in button_info(p).actioned_state_info is set to be ID(q). Then,
25 one button command among those included in button_info(p)

is executed (Step S88).

If the current button is judged not be in active state,
an identifier resulting from adding the variable q to
start_object_id_selected in
5 button_info(p).selected_state_info is set to be ID(q). (Step
S89).

Once ID(q) is determined as a result of the above
operations, the Graphics Object (p), having the ID(q) and
existing in the Object Buffer 15, is written to the position
10 on the Graphics Plane 8 indicated by
button_horizontal_position and button_vertical_position of
button_info(p) (Step S90).

By the above-explained loop processing, among the plural
Graphics Objects that constitute the selected state (or the
15 active state) of the current button, and the normal state
of the other buttons, the Graphics Object corresponding to
 q th page is written to the Graphics Plane 8.

Step S91 is to judge whether start_object_id_normal+ q
has reached end_object_id_normal. If the judgment of Step
20 S91 results in the negative, the value resulting from
incrementing the variable q by 1 is set as the variable
"animation(p)" (Step S92). If the judgment of Step S91 results
in the affirmative, the variable "animation (p)" is
initialized to have the value 0 (Step S93). The above-stated
25 operations are repeated to all the button_info in ICS (Step

S81, Step S82). When all the button_info have undergone the above operations, the control will return to the main routine.

During the above-explained Step S80-Step S93, each time the main routine (Step S35-Step S37) is performed one time, the image of each button of the interactive screen will be updated to a new Graphics Object. This means that, when the above-mentioned main routine (Step S35-Step S37) is performed several times, a so-called animation is realized. In the animation, the Graphics controller 17 adjust time so that the display interval for one frame of Graphics Object will be the value indicated by animation_frame_rate_code.

It should be noted here that, at Step S88, the button commands included in button_info(p) are executed one by one. However, it is also possible to execute the button commands collectively, after the series of Graphics Objects corresponding to the active state has been displayed. Next, the process of UO operation, which is to be performed at Step S37 of the main routine, is explained with reference to FIG.76.

FIG.76 is a flowchart showing the process of UO operation. In this flowchart, it is judged whether any of the conditions of Step S100-Step S103 holds. If any of the conditions holds, a corresponding processing is performed, and then goes back to the main routine. Step S100 is to judge whether UomaskTable is set as "1", and if the judgment is in the affirmative, the control will return to the main routine, without performing

any processing.

Step S101 is to judge whether MoveUP/Down/Left/Right key has been pushed. If the judgment is in the affirmative, the current button is changed (Step S104), and it is then
5 judged whether auto_action_flag of the current button is 01 (Step S108). If the judgment of Step S108 is in the negative, the control returns to the main routine. If the judgment of Step S108 is in the affirmative, the control is moved to Step S105.

10 Step S102 is to judge whether the activated key has been pushed. If the judgment is in the affirmative, the current button i is changed to an active state (step S105). Then, the variable "animation(i)" is set to be 0 (Step S106).

Step S103 is to judge whether it is a case of numerical
15 value inputting. If the judgment is in the affirmative, a corresponding numerical inputting operation is performed (Step S107), and the control returns to the main routine. Among the processes in FIG.76, each of Step S104 and Step S107 is a subroutine. The processes of these subroutines are
20 shown in FIG.77 and FIG.78. The following is an explanation on these flowcharts.

FIG.77 is a flowchart showing the process of current buttonchanging operation. First, among upper_button_number, lower_button_number, Left_button_number, and
25 right_button_number, which belong to neighbor_info of the

current button, the one corresponding to the pushed key is identified (Step S110).

Then the current button is set as "button i", and the button to be the new current button is set as "button j" (Step S111). Step S112 is to judge whether the button j set in Step S111 corresponds to the button i. If they correspond to each other, the control will return to the main routine without performing any processing. If they do not correspond to each other, the button j is set as the current button (Step S113), the variable "animation(i)" and the variable "animation(j)" are set to be 0, and the control returns to the main routine (Step S114).

FIG.78 is a flowchart showing the process of numerical value inputting operation. Judgment is performed as to whether there is Button info.j that has button_number matching the inputted numerical value (Step S121). Then judgment is performed as to whether numerically_selectable_flag, of Button info.j, is 1 (Step S122). If Step S121 and Step S122 are "Yes", the current button is changed to a normal state, and the button j is set as the current button (Step S123), and the variable "animation(i)" and the variable "animation(j)" are set to be 0 (Step S124). After these operations, judgment is performed as to whether auto_action_flag, of Button info.j, is 1 (Step S125). If the judgment is in the negative, the control returns to the main

routine.

If the judgment is in the affirmative, the current button is changed to an active state at Step S126, and the control returns to the main routine.

- 5 If any one of Steps S121-S122 is No, the control will return to the main routine.

The Graphics controller 17 performs the above processes, for performing sync display. Here, please note that if performing an interactive screen display triggered by a user
10 operation using Popup display or the like, the Stream Graphics processor 14 and the Graphics controller 17 perform the following operations, which are the same operations performed for performing sync display. By performing the following operations, the Graphics Object is obtained in the Graphics
15 Plane 8. After the Graphics Object is obtained as mentioned above, it is waited until the current reproducing point passes the time indicated by the PTS assigned to ICS. Then, after the mentioned time, if the UO controller 18 receives UO indicating a menu call, it will be outputted to the CLUT unit
20 9, and instructs the CULT unit 9 to perform the Graphics Object stored in the Graphics Plane 8. If such outputting is performed in synchronization with the UO, a Popup display in accordance with the push of the menu call will be realized.

The above explanation sets forth the setting of PTS in
25 ICS; and DTS in ODS and PTS, which belong to DS_n. However,

it does not mention DTS in ICS; DTS and PTS in PDS; DTS and PTS in END. In view of this, the following explains the time stamps relating to these. Since WDS does not exist in the second embodiment, ICS should be loaded to the Composition
 5 buffer 16, prior to 1) the decoding start time of the first PDS (PDS1) of DS_n (i.e. DTS(DS_n[ODS1])), and 2) the time at which the first PDS(PDS1) in DS_n becomes available (i.e. PTS(DS_n[PDS1])). In other words, it should be set the value that satisfies the following expression:

$$\begin{aligned} 10 \quad & \text{DTS}(\text{DS}_n[\text{ICS}]) \leq \text{DTS}(\text{DS}_n[\text{ODS1}]) \\ & \text{DTS}(\text{DS}_n[\text{ICS}]) \leq \text{PTS}(\text{DS}_n[\text{PDS1}]) \end{aligned}$$

Next, the setting of DTS and PTS, for each PDS belonging to DS_n, is explained.

15 The time at which each PDS belonging to DS_n becomes valid in the CLUT unit 9, is from 1) the time at which ICS is loaded to the Composition buffer 16 to 2) the decoding start time for the first ODS (DTS(DS_n[ODS1])). In view of this, the PTS value of each PDS belonging to the DS_n (i.e. PDS1-PDSlast)
 20 should be set to the value that satisfies the following relations:

$$\begin{aligned} & \text{DTS}(\text{DS}_n[\text{ICS}]) \leq \text{PTS}(\text{DS}_n[\text{PDS1}]) \\ & \text{PTS}(\text{DS}_n[\text{PDS}_j]) \leq \text{PTS}(\text{DS}_n[\text{PDS}_{j+1}]) \leq \text{PTS}(\text{DS}_n[\text{PDSlast}]) \\ & \text{PTS}(\text{DS}_n[\text{PDSlast}]) \leq \text{DTS}(\text{DS}_n[\text{ODS1}]) \end{aligned}$$

25

Next, the setting of PTS of "END of Display SetSegment" belonging to DS_n is explained. The END that belong to DS_n shows the ending of the DS_n. Therefore it should be the decoding end time of the last ODS(ODS_{last}) of the DS_n. This
 5 decoding end time is indicated by PTS(PTS(DS_n[ODS_{last}]]), and so PTS of End should be set as the value indicated by the following expression:

$$\text{PTS}(\text{DS}_n[\text{END}]) = \text{PTS}(\text{DS}_n[\text{ODS}_{\text{last}}])$$

10 In view of the relation with ICS belonging to DS_n and DS_{n+1}, ICS in DS_n is loaded to the Composition buffer 16 prior to the loading time of the first ODS(i.e. ODS₁). Therefore PTS in END should be after 1) the loading time of ICS belonging to DS_n (i.e. DTS(DS_n[ICS])), and before 2) the loading time
 15 of ICS belonging to DS_{n+1} (i.e. DTS(DS_{n+1}[ICS])). Accordingly, the PTS in END should satisfy the following relation:

$$\text{DTS}(\text{DS}_n[\text{ICS}]) \leq \text{PTS}(\text{DS}_n[\text{END}]) \leq \text{DTS}(\text{DS}_{n+1}[\text{ICS}])$$

20 On the other hand, the loading time of the first ODS(i.e. ODS₁) PTS in END (i.e. PTS(DS_n[END])) should be after the loading time of PDS belonging to DS_n. Accordingly, PTS in END should satisfy the following relation:

$$\text{PTS}(\text{DS}_n[\text{PDS}_{\text{last}}]) \leq \text{PTS}(\text{DS}_n[\text{END}])$$

25

Since the ICS, PDS, ODS to which DTS and PTS are set, are incorporated in AVClip in advance, it is convenient to describe an interactive control for making the reproduction apparatus execute a certain operation at the time when a frame of a certain moving picture appears in the screen. In other words, the above arrangement is convenient to describe an interactive control that is synchronized closely with the moving picture contents. In addition, the ICS, PDS, and ODS are multiplexed onto the AVClip itself. Therefore in a case where the sections to which a user would like to perform reproduction control are numerous, such as some hundreds, it is not necessary to store all the IDS, PDS, and ODS, which correspond to all of the sections, in the memory. Because the ICS, PDS, and ODS are to be read from a BD-ROM, the following arrangement is sufficient. That is, ICS, PDS, and ODS, which correspond to the moving picture section to be played back at the moment, stay resident in the memory. After playback for this moving picture section is finished, the corresponding ICS, PDS, and ODS are deleted from the memory, and instead, ICS, PDS, ODS corresponding to the succeeding moving picture section are stored in the memory. Since ICS, PDS, and ODS are to be multiplexed onto AVClip, even if the number of ICS, PDS, and ODS becomes some hundreds, the occupancy of the memory can be restrained to a minimum required level.

As explained above, the present embodiment has 360 pages.

of ODS so as to realize animation. Therefore when the button material is grouped under three states, the ODS will be grouped by 120 pages (i.e. into three button-state groups). The button-state groups are arranged so that a group corresponding to earlier appearing state is placed more to the beginning, compared to a group corresponding to later appearing state. Because of this, at reproduction, a button-state group corresponding to earlier appearing state is loaded to the reproduction apparatus accordingly earlier, compared to a button-state group corresponding to later appearing state. According to this, even if decoding of all the 360 pages of ODS has not been complete, at least the initial display is ready for being performed if only about 1/3 - 2/3 of the total ODS is complete. Since the initial display operation can be commenced at the completion of about 1/3 - 2/3 of the total ODS, even if there are numerous ODS to be read and decoded, the initial display will not be delayed. Therefore, an interactive screen is executed swiftly, even if the screen contains animation to entertain users.

(Third Embodiment)

The present embodiment relates to a manufacturing method of a BD-ROM. FIG.79 illustrates a method of manufacturing the PCS explained in the first embodiment.

The manufacturing method of a BD-ROM includes: a material

producing step S201 of photographing an image picture, and
of recording corresponding audio, for example; an authoring
step S202 of generating an application format; and a press
step S203 of completing the BD-ROM by performing
5 pressing/lamination.

Among these steps, the authoring step directed to BD-ROM
includes the following step S204-Step S210.

At Step S204, control information, window define
information, palette define information, and graphics are
10 described. At Step S205, the control information, the window
define information, the palette define information, and the
graphics are respectively converted into a functional segment.
At Step S206, PTS in PCS is set, according to when the picture
to be displayed in sync appears. At Step S207, DTS[ODS] and
15 PTS[ODS] are set, according to the value of PTS[PCS]. At Step
S208, DTS[PCS], PTS[PDS], DTS[WDS], and PTS[WDS] are set,
according to the value of DTS[ODS], and at Step S209, the
chronological change, in occupancy, of each buffer of the
planer model is expressed as a graph. At Step S210, it is
20 judged whether the chronological change expressed in graph
satisfies the restriction imposed at the player model. If
the judgment of Step S210 results in the affirmative, a graphics
stream is created at Step S212, and an AVClip is obtained
by multiplexing the graphics stream with a video stream and
25 an audio stream, which have been created separately from the

graphics stream. Then the AVClip is made to be in conformity with the format of the BD-ROM, thereby completing an application format.

The above explanation is for the manufacturing method
5 of the recording medium according to the first embodiment. A manufacturing method of the recording medium according to the second embodiment is shown in FIG.80. In FIG.80, Step S304-Step S308 replace Step S204-Step S208 of FIG.79.

As follows, Step S304-Step S308 are explained. At Step
10 S304, control information, palette define information, and graphics are described. At Step S305, the control information, the palette define information, and the graphics are respectively converted into a functional segment. At Step S306, PTS in ICS is set, according to when the picture to
15 be displayed in sync appears. Then at Step S307, DTS[ODS] and PTS[ODS] are set, according to the value of PTS[ICS]. At Step S308, DTS[ICS] and PTS[PDS] are set, according to the value of DTS[ODS].

20 (Note)

Needless to say, the above explanation does not show all the embodiments and use form of the present invention. The present invention is also realized by an embodiment to which any of the following modifications (A), (B), (C), (D),
25 ...etc. is added. Please note that the inventions in the claims

of the present invention are broadened or generalized descriptions of either the above-described embodiments, or the modified embodiments based on the following modifications. The extent of the broadening and generalization reflects the
5 state of the art at the time of filing.

(A) In all the embodiments, the recording medium according to the present invention is assumed to be a BD-ROM. However, the characteristics of the recording medium of the present invention lies on the graphics stream stored in the
10 recording medium, and this characteristics does not rely on the physical nature of a BD-ROM. In other words, any recording medium that is operable to record a graphics stream may be used in realizing the present invention. The examples include: an optical disk such as DVD-ROM, DVD-RAM, DVD-RW,
15 DVD-R, DVD+RW, DVD+R, CD-R, CD-RW; and an optical magnetic disk such as PD and MD. The examples further include a semiconductor memory card such as a compact flash card, a smart media, memory stick, multimedia card, and a PCM-CIA card. Still further, the examples include: a magnetic
20 recording disk such as a flexible disk, SuperDisk, Klik!; and a removable hard disk drive such as ORB, Jaz, SparQ, SyJet, EZFley, and micro drive. The examples also include a hard disk incorporated in an apparatus.

(B) In the all the embodiments, the reproduction
25 apparatus decodes the AVClip stored in the BD-ROM, before

outputting it to a television. However, a structure is also possible in which the reproduction apparatus is a mere BD-ROM drive, and the other components are included in the television. In this case, the reproduction apparatus and the television
5 may be connected to each other via an IEEE1394, to constitute a home network. The reproduction apparatus of the embodiments is for use with the television connected thereto. However, the reproduction apparatus may be integral with a display. Furthermore, in the reproduction apparatus of each of the
10 embodiments, only the system LSI (integrated circuit), which is the essence of the processing, may be considered the invention. The reproduction apparatus and the integrated circuit are both the inventions described in the present specification, and so the act of manufacturing a reproduction
15 apparatus having any of the stated form and manner, based on the internal structure of the reproduction apparatus of the first embodiment is also an embodiment of the present invention. Any act of transfer whether incurring charge or not (sales if incurring charge, and gifts if not incurring
20 charge), rent, and import constitute an embodiment of the present invention. In addition, any act of performing these transfer and rent, through the exhibition at the shops, catalogue solicitation, and pamphlet distribution, also constitutes an embodiment of the present invention.

25 (C) The information processing shown in each

flowchart is concretely realized using hardware resources. Therefore any programs whose processes are shown in the flowcharts may respectively constitute an independent invention. All the embodiments relating to the programs
5 assume that a program is in the form incorporated in the corresponding reproduction apparatus. However, The program itself, shown in the first embodiment, may be an independent embodiment from the corresponding reproduction apparatus. The embodiment of a program itself includes: (1) act of
10 manufacturing the program; (2) act of transfer the program whether incurring charge or not; (3) act of renting; (4) act of importing; (5) act of providing to the public through an interactive electronic communication circuit; and (6) offering the transfer to general users, through exhibition
15 at shops, catalogue solicitation, pamphlet distribution, and so on.

(D) If the time concept existing in each step, which is executed chronologically in every flowchart, is considered an indispensable factor for specifying the present invention,
20 then each process in the flowchart is interpreted to disclose a use pattern of the reproduction method. If the processes of the above-explained flowcharts are executed by chronologically executing each step therein, so as to be effective for and instrumental in achieving the object of
25 the present invention, that will correspond to the embodiment

of the recording method of the present invention.

(E) When being recorded to the BD-ROM, it is desirable that each TS packet constituting an AVClip is assigned an extra header. The extra header is called "TP_extra_header", includes "Arrival_Time_Stamp" and "copy_permission_indicator", and has 4-byte length. TP_extra_header-assigned TS packets (EX-assigned TS packet) are divided into groups each including 32 TS packets, and are written into three sectors. The total size of the groups each composed of 32 EX assigned TS packets is 6144 bytes (=32*192), which is equal to the total size of the three sectors (6144 bytes (=2048*3)). 32 EX-assigned TS packets stored in one sector is referred to as "Aligned Unit".

When used in the home network connected through the IEEE1394, the reproduction apparatus performs Aligned Unit transmission by the following transmission processing. That is, the sender apparatus removes TS_extra_header from each of the 32 EX-assigned TS packets in an Aligned Unit, encodes the TS packets' main bodies, and outputs them. In outputting the TS packets, isochronous packets are inserted in many places between the TS packets. The exact insertion places are based on the time shown by Arrival_Time_Stamp of TS_extra_header. In response to outputting of the TS packets, the reproduction apparatus outputs DTCP_Descriptor. DTCP_Descriptor signifies the copy permit/prohibit setting of TP_extra_header.

Therefore, if DTCP_Descriptor is described to signify "prohibit copy", the TS packets will not be recorded on another apparatus, at the time when they are used in the home network connected through the IEEE1394.

5 (F) The digital stream in each of the embodiments is an AVClip in the BD-ROM standard. However, it may alternatively be a VOB (Video Object) in the DVD-Video standard or in the DVD-Video Recording standard. A VOB is a program stream conforming to the ISO_IEC13818-1 standard, and is
10 obtained by multiplexing a video stream and an audio stream. The video stream in an AVClip may alternatively be in MPEG4 method or in WMV method. Furthermore, an audio stream may alternatively be in Dolby=AC3 method, MP3 method, MPEG-AAC method, or dts method.

15 (G) The movie works in the embodiments may be obtained by encoding analogue image signals, or stream data made up of transport streams broadcasted through a digital broadcast. Furthermore, a content may be obtained by encoding analogue/digital movie signals recorded on videotape, or may
20 be a digital work distributed from a distribution server.

 (H) The Graphics Object, shown in the first and second embodiments is raster data that has been encoded in run-length encoding method. The reason why the run-length encoding method is used as compressing/encoding method of Graphics
25 Objects is that the run-length encoding method is the most

suitable for compressing/decompressing subtitles. Subtitles are characteristic in that the continual length of one pixel value in horizontal direction is comparatively long. Therefore, if using the run-length encoding
5 compression, a high compression rate is obtained. In addition, the load incident to decompression is not much, and so is suitable for creating software for decoding processing. In the present invention, compression/decompression method used for the subtitles is used for the Graphics Object, so that
10 one apparatus structure for performing decoding is shared between the subtitles and the Graphics Objects. However, adopting of run-length encoding method for Graphics Objects is not an indispensable feature of the present invention, and Graphics Objects may alternatively be PNG data. In
15 addition, raster data may be vector data, or transparent images.

(I) Display effects of PCS may be given to graphics of subtitles selected according to the language setting at the apparatus side. By this, the display effect used to be
20 realized by characters represented by the moving picture main body in current DVDs is able to be realized using the subtitle graphics displayed according to the language setting at the apparatus side. This is practically very valuable.

(J) Display effects of PCS may be given to graphics
25 of subtitles selected by the apparatus side according to the

display setting. Specifically, graphics for various display modes such as wide vision, pan scan, and letter box have been recorded on a BD-ROM, and the apparatus selects one of them according to the setting of the television to which the apparatus is connected to, and displays the selected type of graphics. In this case, a display effect will be given to the subtitle graphics displayed in the above way. Therefore the subtitle graphics will look better. By this, the display effect used to be realized by the characters represented by the moving picture main body in the current DVDs is able to be realized using the subtitle graphics displays according to the display setting at the apparatus side. This is practically very valuable.

(K) In the first embodiment, the write rate R_c to the Graphics Plane is defined so that the window size is 25% of the entire size, so that Graphics Plane clearing and re-rendering are possible within one video frame. However alternatively, if assuming that the vertical retrace time is 25% of $1/29.93$, then the R_c will be 1Gbps. By setting R_c as such, the graphics display will be facilitated. This is practically very valuable.

In addition to writing at the vertical retrace time, writing synchronized with the write scan may be simultaneously performed. By this, even if the write rate is $R_c=256\text{Mbps}$, display will be facilitated.

(L) In each of the embodiments, the reproduction apparatus is equipped with a Graphics Plane. However, instead of this Graphics Plane, a line buffer that can store decompressed pixels for one line may be mounted to the reproduction apparatus. Since the conversion into an image signal can be performed for each horizontal row (i.e. line), if such a line buffer is provided, the reproduction apparatus is able to perform the conversion into an image signal.

(M) Subtitles being graphics are explained above, as character sequences for representing words uttered in the movie works. However, the subtitles may contain a combination of figure, character, and color, as constituting a trademark. Further, the subtitles may contain all sorts of national marks, official marks adopted by nations for supervision and authorization, marks of international organizations, marks representing places of origin of specific commodities, and the like.

(N) The first embodiment assumes that subtitles are displayed at the upper/lower parts of the screen, and so the windows are defined at the upper/lower parts of the Graphics Plane, accordingly. However, it is also possible to define the windows at the right/left parts of the Graphics Plane. This is useful in displaying Japanese subtitles in longitudinal direction.

(O) AVClip in each of the embodiments constitutes a

movie work. However, AVClip may be for realizing "karaoke" (accompaniment of prerecorded tape). In this case, in the course of a song, PCS may realize a display effect that changes the color of subtitles, for example.

5 (P) In a case where plural reproduction paths joint to one another, and that the default selected button changes depending on which reproduction path is to be taken, the following arrangement is preferable. That is, reproduction control in the dynamic scenario is described so that at the
10 time when each reproduction path is passed, the eigenvalue for the reproduction path is set at the register of the reproduction apparatus, and that the reproduction processes are described so that buttons will be set in a selected state according to the values set in the register. By this
15 arrangement, the button to be in a selected state can be changed according to which reproduction path is to be passed.

Industrial Applicability

20 A recording medium and a reproduction apparatus, of the present invention, realize a subtitle display having display effect and an interactive display containing animation, and so help provide the market with movie works of high added values, which helps invigorate the movie market and the
25 consumer goods market. Accordingly, the recording medium and

the reproduction apparatus, of the present invention, are very useful in the movie industry and the consumer goods industry.

Claims

1. A recording medium storing therein a digital stream that is obtained by multiplexing a graphics stream and a video stream, the graphics stream being a packet sequence that includes a data packet storing graphics data and a control packet storing control information, wherein

the data packet has a time stamp whose value indicates a decoding time of the graphics data, and

10 the control packet has a time stamp whose value indicates a time at which the graphics data, after being decoded, is displayed combined with the video stream.

2. The recording medium of Claim 1, wherein

15 the control information includes type information that indicates a memory management start,

the time stamp of the control packet is a presentation time stamp, and

the control packet further includes a decode time stamp
20 whose value indicates a point of a reproduction timeline of the digital stream, which corresponds to the memory management start, and a time at which the control information is read to a memory.

25 3. The recording medium of Claim 2, wherein

the value of the presentation time stamp is obtained by adding a predetermined value to the value of the decode time stamp, where the predetermined value is based on: a longer one of a period required for clearing of a screen, and a period
5 required for decoding of the graphics data; and a period required for writing of the graphics data to the screen.

4. The recording medium of Claim 1, wherein
the control information is one of: information
10 indicating a difference with preceding control information; a duplicate of the preceding control information; and information indicating that memory management continues from another digital stream,

the time stamp of the control packet is a presentation
15 time stamp, and

the control packet further includes a decode time stamp whose value indicates a time at which the control information is read to a memory of a reproduction apparatus.

20 5. The recording medium of Claim 4, wherein
the value of the presentation time stamp is obtained by adding a predetermined value to the value of the decode time stamp, where the predetermined value is based on: a longer one of a period required for clearing of a screen and a period
25 required for decoding of the graphics data; and a period

required for writing of the graphics data to the screen.

6. The recording medium of Claim 5, wherein
the screen clearing is clearing of a window area of
5 the graphics plane, the graphics plane being at which the
graphics data is to be disposed,
the graphics stream includes a window define packet
storing window information, and
the window information indicates the window area of
10 the graphics plane.

7. The recording medium of Claim 6, wherein
a value of a decode time stamp of the window define
packet indicates a time in a range between a time shown by
15 the decode time stamp of the control packet and a time shown
by the time stamp of the data packet, inclusive, and
a value of a presentation time stamp of the window define
packet indicates a time recommended to start transferring
the graphics data for display.

20

8. The recording medium of Claim 7, wherein
the graphics stream includes a palette define packet
storing palette information that defines color setting used
in display of the graphics data, and
25 a value of a presentation time stamp of the palette define

packet indicates a time when the palette information becomes available for use.

9. The recording medium of Claim 1, wherein
5 the graphics stream has two sets of graphics data, and
a value of the time stamp of the control packet is obtained
by adding a predetermined value to a value of the time stamp
of the data packet, where the predetermined value is a total
of a period x and a period y,
10 the period x being a longer one of: a total of
a period required for clearing a screen and a period
required for writing the former of the two sets of graphics
data after decoded, to the screen; and a total period
required for decoding the two sets of graphics data, and
15 the period y being a period required for writing,
to a screen, the latter of the two sets of graphics data
after decoded.

10. The recording medium of Claim 1, wherein
20 the graphics stream includes a plurality of data packets
storing graphics data, including the data packet,
the data packets make up a data-packet sequence,
the data-packet sequence constitutes graphical button
materials,
25 the time indicated by the time stamp of the control packet

is an initial display time of an interactive screen, and
a time at which the initial display is performed is
obtained by adding a predetermined period to a decoding ending
time of graphics data positioned at a middle of the data-packet
5 sequence,

where the predetermined period is based on a total of
a first period required for clearing a graphics plane of a
reproduction apparatus and a second period required to perform
writing for the initial display, to the graphics plane.

10

11. The recording medium of Claim 10, wherein
if button materials, which are to be in a selected state
as a default in the initial display, are statically determined,
the control information includes default selected
15 information specifying the button materials, and the second
period is a period required for writing, to the graphics plane,
a total of: firstly displayed part of decompressed graphics
data representing a selected state of one button; and firstly
displayed part of decompressed graphics data representing
20 normal states of buttons different from the button.

12. The recording medium of Claim 10, wherein
if button materials, which are to be in a selected state
as a default in the initial display, dynamically change,
25 the second period is a period required for writing data

of size T, to the graphics plane,

where the size T is obtained by adding together sizes x of all buttons, a size x being obtained by an expression of:

5 size $x = \max(N\text{-first}, S\text{-first}),$

N-first representing firstly displayed part of entire graphics data representing a normal state,

S-first representing firstly displayed part of entire graphics data representing a selected state, and

10 $\max(a, b)$ being a formula for indicating one of "a" and "b" that has a larger size therebetween.

13. The recording medium of Claim 10, wherein the control information includes type information, and

15 when corresponding type information indicates a memory management start, the predetermined period is a total of the first period and the second period, and

 when the type information indicates either a difference with preceding control information, or a
20 duplicate of the preceding control information, the predetermined period is the second period.

14. The recording medium of Claim 10, wherein

 the graphics stream includes a palette define packet
25 storing palette information that defines color setting used

in display of the graphics data in the plurality of data packets,
and

a value of a presentation time stamp of the palette define
packet indicates a time when the palette information becomes
5 available for use.

15. A reproduction apparatus for a digital stream that
is obtained by multiplexing a video stream and a graphics
stream, the graphics stream being a packet sequence that
10 includes a data packet storing graphics data and a control
packet storing control information, the reproduction
apparatus comprising:

a video decoder operable to obtain a moving picture by
decoding the video stream; and

15 a graphics decoder including:

a processor that starts decoding of graphics data when
a current reproduction point of the video stream reaches
a point shown by a decode time stamp of the data packet,
and ends the decoding when the current reproduction point
20 reaches a point shown by a presentation time stamp of the
data packet; and

a controller that, according to a presentation time
stamp of the control packet, combines, with a video stream,
the graphics data after the decoding, and displays the
25 graphics data combined with the video stream.

16. The reproduction apparatus of Claim 15, wherein the graphics decoder includes:

5 a coded data buffer for storing compressed graphics data, and

an object buffer for storing decompressed graphics data resulting from the decoding of the processor, and the reproduction apparatus includes a graphics plane for storing part of the decompressed graphics data obtained
10 by the decoding of the processor, the part of the decompressed graphics data being used for display,

the controller judges whether type information included in the control information indicates a memory management start, and if judging affirmatively, clears the coded data buffer,
15 the object buffer, and the graphics plane when the current reproduction point of the video stream reaches a point shown by a decode time stamp of the control packet.

17. The reproduction apparatus of Claim 16, wherein
20 the controller, when the current reproduction point reaches a point shown by the decode time stamp of the control packet, starts clearing the graphics plane, and

the processor, when the current reproduction point reaches a point shown by the decode time stamp of the data
25 packet, decodes the graphics data in parallel with the clearing

of the controller, and

the controller, when the current reproduction point reaches a point shown by the presentation time stamp of the control packet, writes the decompressed graphics data, to
5 the graphics plane.

18. The reproduction apparatus of Claim 17, wherein
the value of the presentation time stamp of the control
packet is obtained by adding a predetermined value to a value
10 of the decode time stamp of the control packet, where the
predetermined value is based on: a longer one of a period
required for clearing of a screen, and a period required for
decoding of the graphics data; and a period required for writing
of the graphics data to the screen, and

15 the controller, when the current reproduction point
reaches a point shown by the presentation time stamp of the
control packet, displays content of the graphics plane.

19. The reproduction apparatus of Claim 16,
20 wherein the graphics stream includes a window define
packet storing window information,

the controller clears the graphics plane when the type
information indicates a memory management start, and clears
a window area of the graphics plane, which is indicated by
25 the window information, when the type information indicates

other than a memory management start.

20. The reproduction apparatus of Claim 19, wherein
control information, whose type information does not
5 indicate a memory management start, is one of: information
indicating a difference with preceding control information;
a duplicate of the preceding control information; and
information indicating that memory management continues from
another digital stream, and
10 when the current reproduction point reaches a point shown
by a decode time stamp of a control packet including said
control information whose type information does not indicate
a memory management start, the controller reads corresponding
control information to a memory of the reproduction apparatus.

15
21. The reproduction apparatus of Claim 19, wherein
a decode time stamp of the window define packet indicates
a time in a range between a time shown by a decode time stamp
of the control packet and a time shown by a decode time stamp
20 of the data packet, inclusive, and

decompressed graphics is written to a graphics plane,
by referring to a value of a presentation time stamp of the
window define packet.

25 22. The reproduction apparatus of Claim 21, wherein

the graphics stream includes a palette define packet storing palette information that defines color setting used in display of the graphics data,

the reproduction apparatus includes a color conversion
5 unit operable to perform color conversion on graphics stored in the graphics plane, and

the controller, when the current reproduction point reaches a point shown by a presentation time stamp of the palette define packet, sets the palette information in the
10 color conversion unit.

23. The reproduction apparatus of Claim 19, wherein the graphics stream has two sets of graphics data, a value of a presentation time stamp of the control packet
15 is obtained by adding a predetermined value to a value of a presentation time stamp of the data packet, where the predetermined value is a total of a period x and a period y,

the period x being a longer one of: a total of
20 a period required for clearing a screen and a period required for writing the former of the two sets of graphics data after decoded, to the screen; and a total period required for decoding the two sets of graphics data, and

the period y being a period required for writing,
25 to a screen, the latter of the two sets of graphics data

after decoded, and

the controller, when the current reproduction point reaches a point shown by a presentation time stamp of the control packet, displays content of the graphics plane.

5

24. The reproduction apparatus of Claim 15, wherein the graphics stream includes a plurality of data packets storing graphics data, including the data packet,

the data packets make up a data-packet sequence,

10 the data-packet sequence constitutes graphical button materials,

the graphics decoder combines, with a moving picture, an interactive screen that includes the graphical button materials, and displays the interactive screen combined with
15 the moving picture, and

the reproduction apparatus performs, when the reproduction point of the video stream reaches a point shown by a time stamp of the control packet, an initial display of the interactive screen by using graphics data positioned
20 up to a middle of the data-packet sequence, and

the reproduction apparatus performs, when a user operation is received, updating of the interactive screen by using graphics data positioned after the middle of the data-packet sequence.

25

25. The reproduction apparatus of Claim 24, wherein
a time at which the initial display of the interactive
screen is performed is obtained by adding a predetermined
period to a decoding ending time of graphics data positioned
5 at the middle of the first-packet sequence,

where the predetermined period is based on a total of
a first period required for clearing a graphics plane of the
reproduction apparatus and a second period required to perform
writing for the initial display, to the graphics plane.

10

26. The reproduction apparatus of Claim 25, wherein
if type information included in the control information
indicates a memory management start, the controller sets,
as the predetermined period, a total of the first period and
15 the second period,

and if the type information indicates either a difference
with preceding control information, or a duplicate of the
preceding control information, the controller sets the second
period as the predetermined period.

20

27. The reproduction apparatus of Claim 24, wherein
if button materials, which are to be in a selected state
as a default in the initial display, are statically determined,
the control information includes default selected
25 information specifying the button materials, and calculates

the second period, based on a total of firstly displayed part of decompressed graphics data representing a selected state of one button and firstly displayed part of decompressed graphics data representing normal states of buttons different
5 from the button.

28. The reproduction apparatus of Claim 24, wherein if button materials, which are to be in a selected state as a default in the initial display, dynamically change,
10 the second period is a period required for writing data of size T, to the graphics plane,

where the size T is obtained by adding together sizes x of all buttons, a size x being obtained by an expression of:

15 size $x = \max(N\text{-first}, S\text{-first})$,
N-first representing firstly displayed part of entire graphics data representing a normal state,
S-first representing firstly displayed part of entire graphics data representing a selected state, and
20 $\max(a, b)$ being a formula for indicating one of "a" and "b" that has a larger size therebetween.

29. A recording method for a recording medium, the recording method comprising:

25 a step of creating application data; and

a step of recording the created application data to the recording medium, wherein

the application data includes a digital stream that is obtained by multiplexing a graphics stream and a video stream,
5 the graphics stream being a packet sequence that includes a data packet storing graphics data and a control packet storing control information,

the data packet has a time stamp whose value indicates a decoding time of the graphics data, and

10 the control packet has a time stamp whose value indicates a time at which the graphics data, after being decoded, is displayed combined with the video stream.

30. An integrated circuit used in a reproduction
15 apparatus for a digital stream, the digital stream being obtained by multiplexing a video stream and a graphics stream, the graphics stream being a packet sequence that includes a data packet storing graphics data and a control packet storing control information, the integrated circuit comprising:

20 a video decoder operable to obtain a moving picture by decoding the video stream; and

a graphics decoder including:

a processor that starts decoding of graphics data when
a current reproduction point of the video stream reaches
25 a point shown by a decode time stamp of the data packet,

and ends the decoding when the current reproduction point reaches a point shown by a presentation time stamp of the data packet; and

5 a controller that, according to a presentation time stamp of the control packet, displays the graphics data, after being decoded, combined with the video stream.

31. A program that makes a computer perform reproduction of a digital stream, the digital stream being obtained by
10 multiplexing a video stream and a graphics stream, the graphics stream being a packet sequence that includes a data packet storing graphics data and a control packet storing control information, the program comprising:

a code that makes the computer obtain a moving picture
15 by decoding the video stream; and

a code that makes the computer perform graphics rendering by which the graphics data combined with the moving picture is displayed, the graphics rendering performed by the computer including:

20 a process of starting decoding of graphics data when a current reproduction point of the video stream reaches a point shown by a decode time stamp of the data packet, and ending the decoding when the current reproduction point reaches a point shown by a presentation time stamp of the
25 data packet; and

a process of, according to a presentation time stamp of the control packet, displays the graphics data, after being decoded, combined with the video stream.

5 32. A reproduction method for a digital stream that is obtained by multiplexing a video stream and a graphics stream, the reproduction method comprising:

a process of obtaining a moving picture by decoding the video stream; and

10 a process of performing graphics rendering by which the graphics data combined with the moving picture is displayed, the graphics rendering including:


a process of starting decoding of graphics data when a current reproduction point of the video stream reaches a point shown by a decode time stamp of the data packet, and ending the decoding when the current reproduction point reaches a point shown by a presentation time stamp of the data packet; and


15


a process of, according to a presentation time stamp of the control packet, displays the graphics data, after being decoded, combined with the video stream.

20

FIG. 1

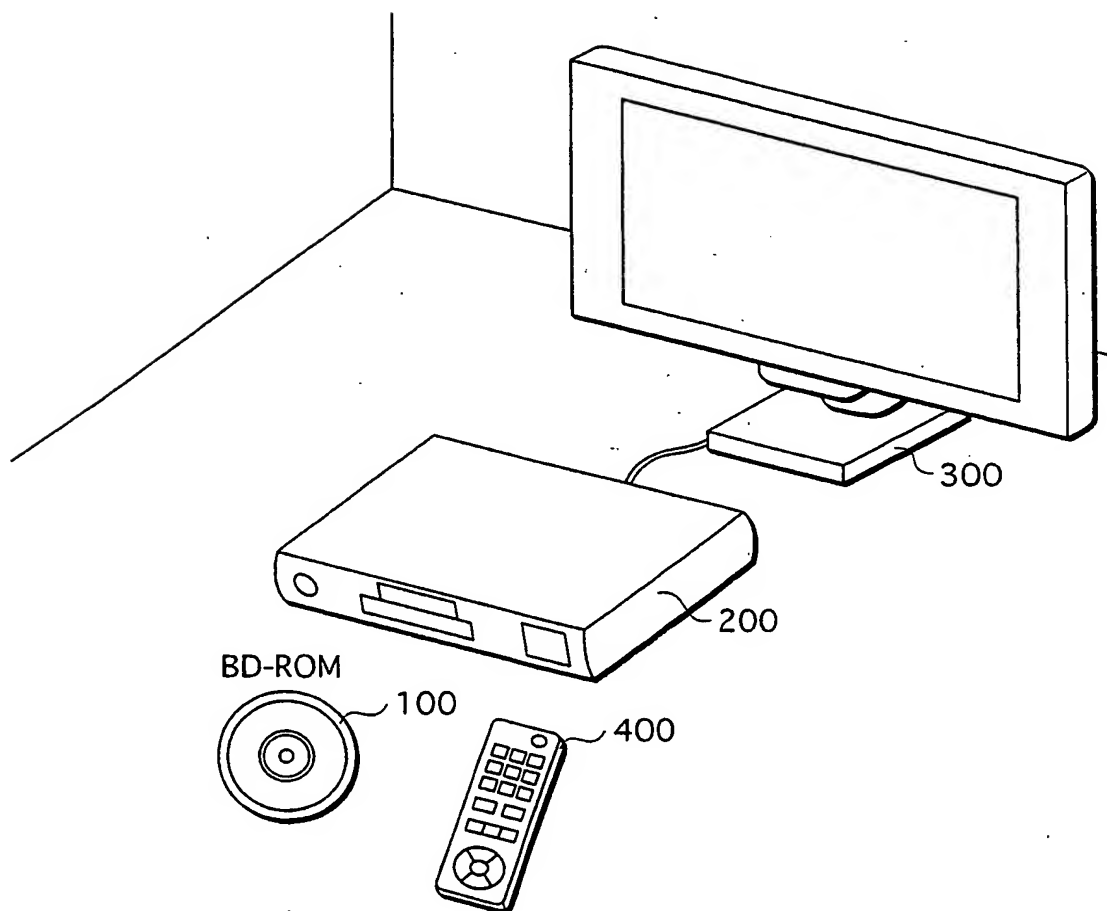

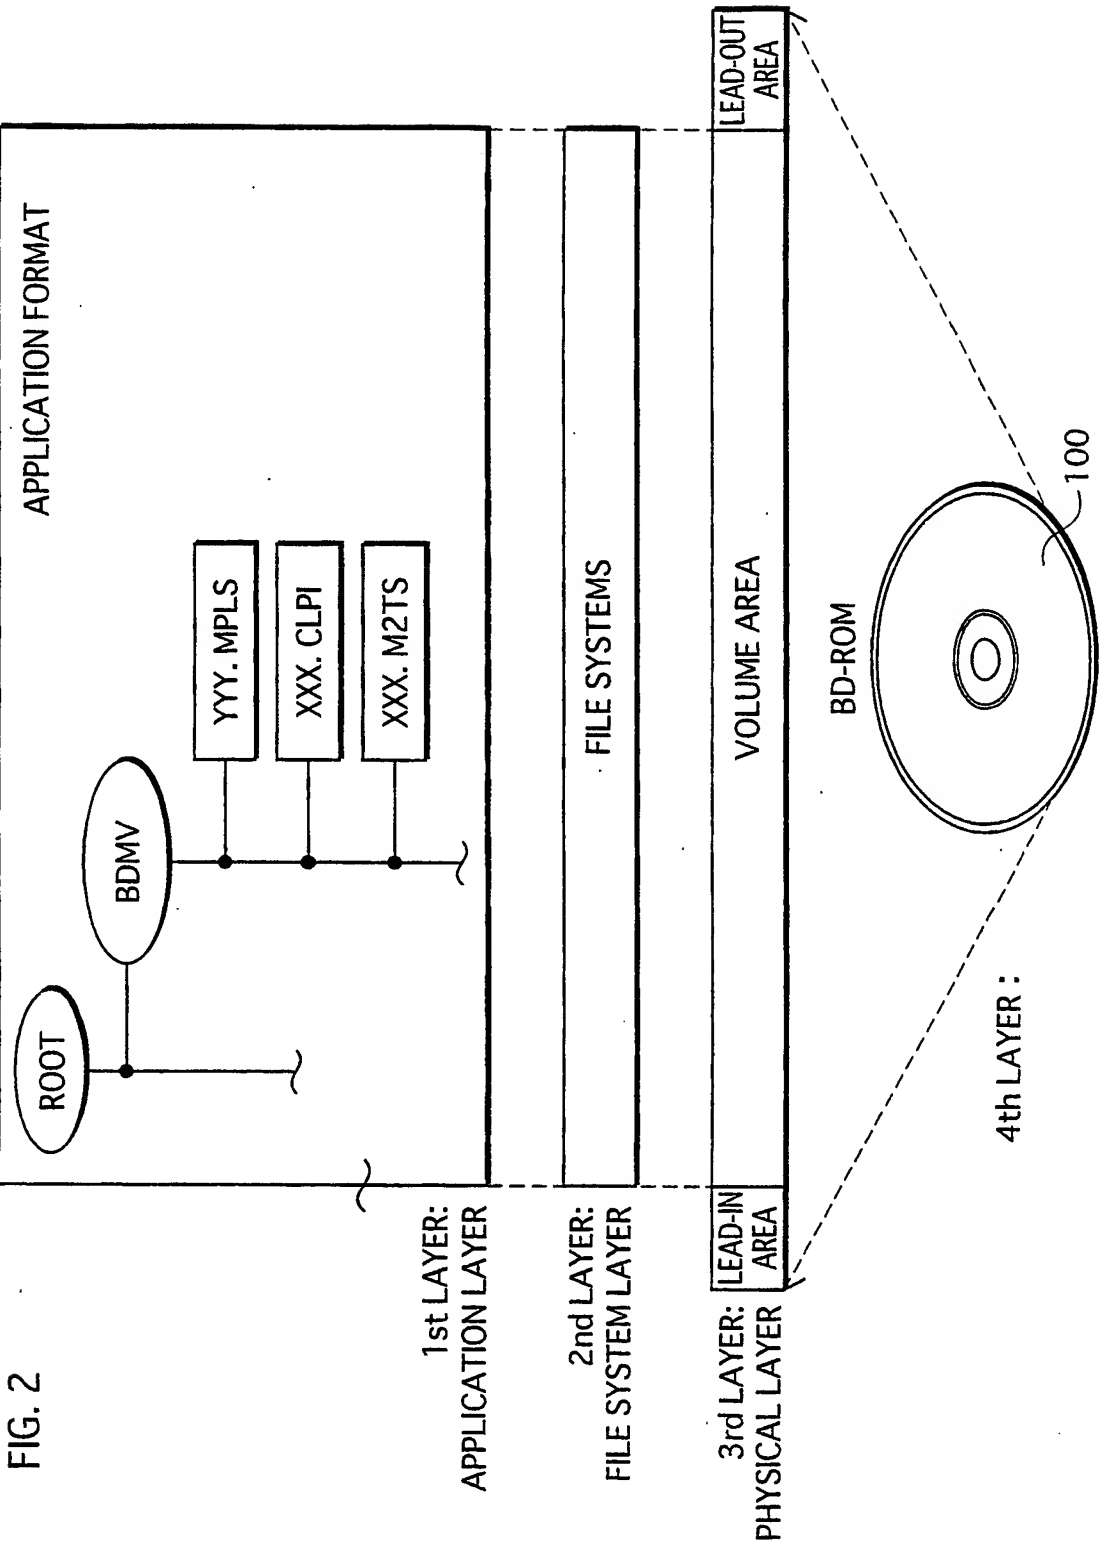

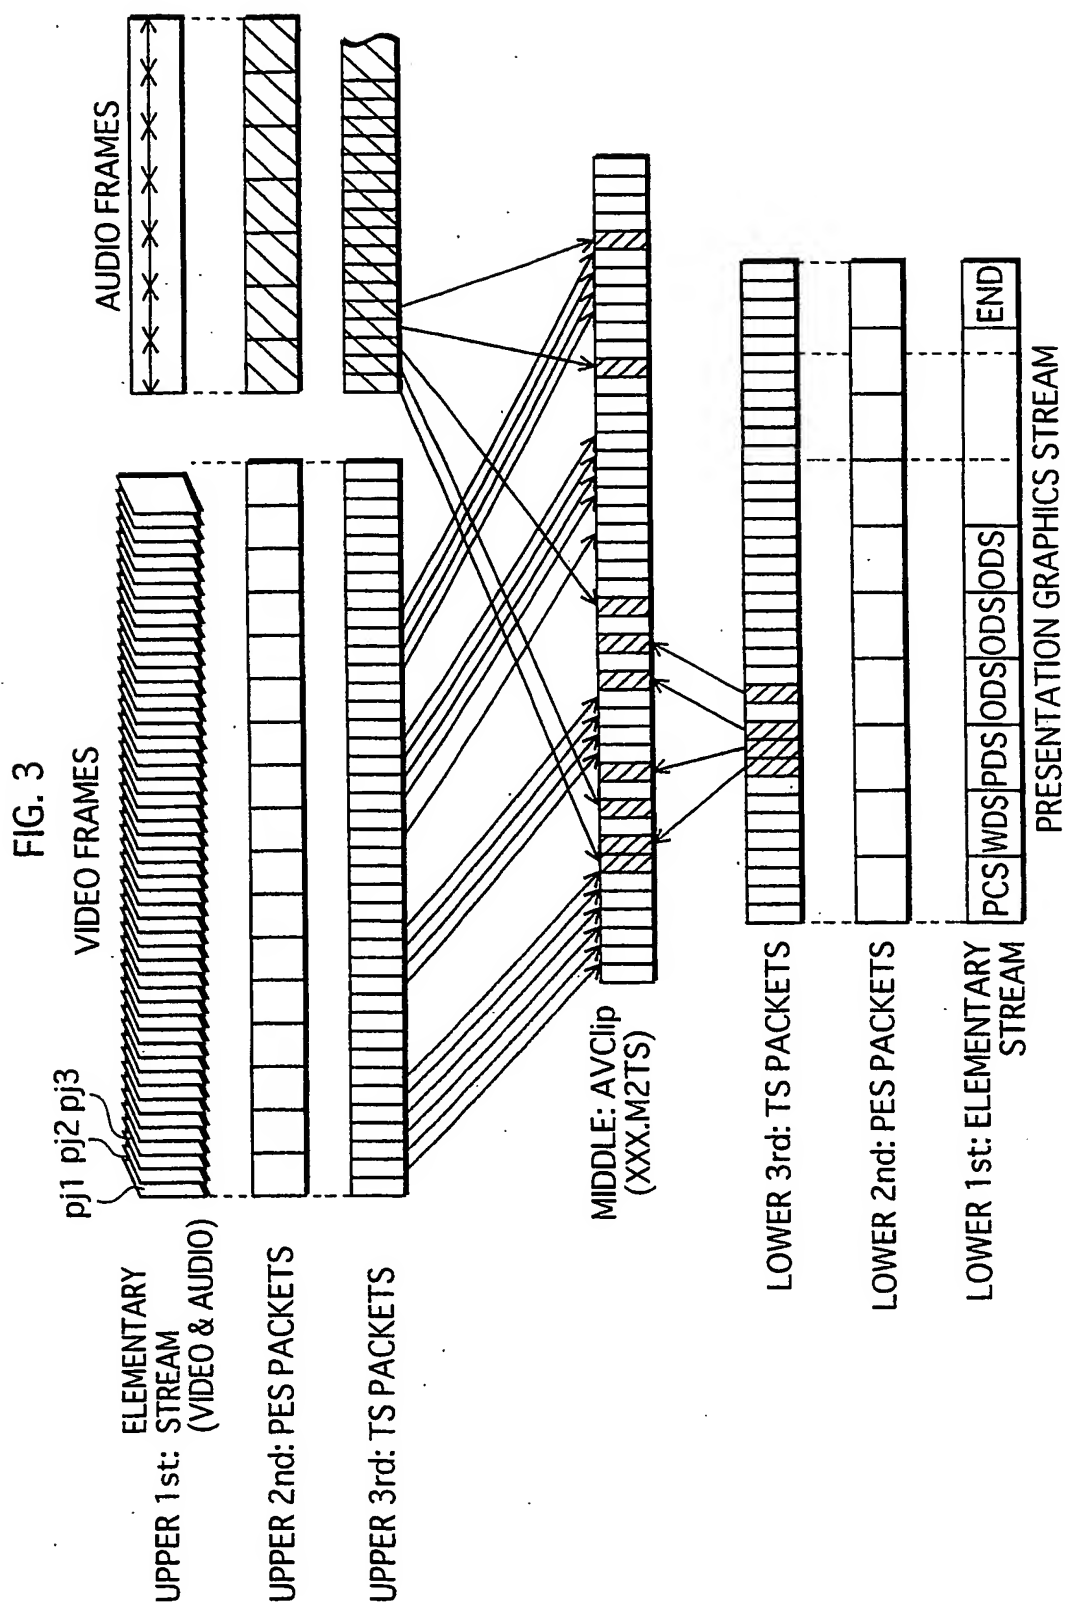

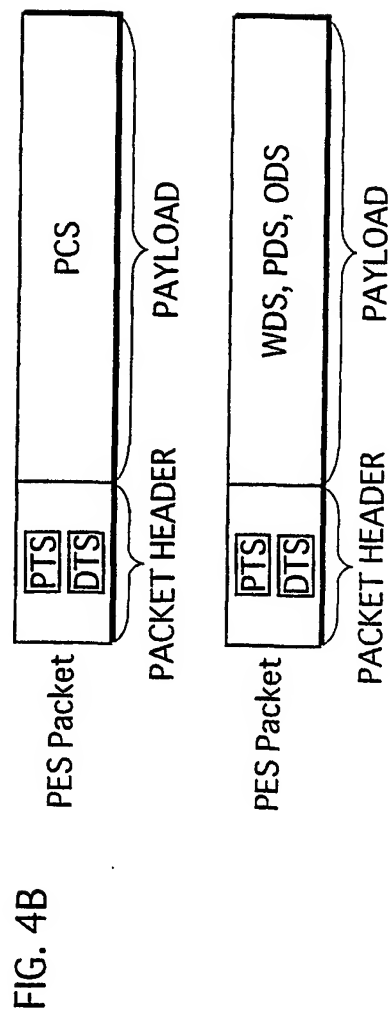
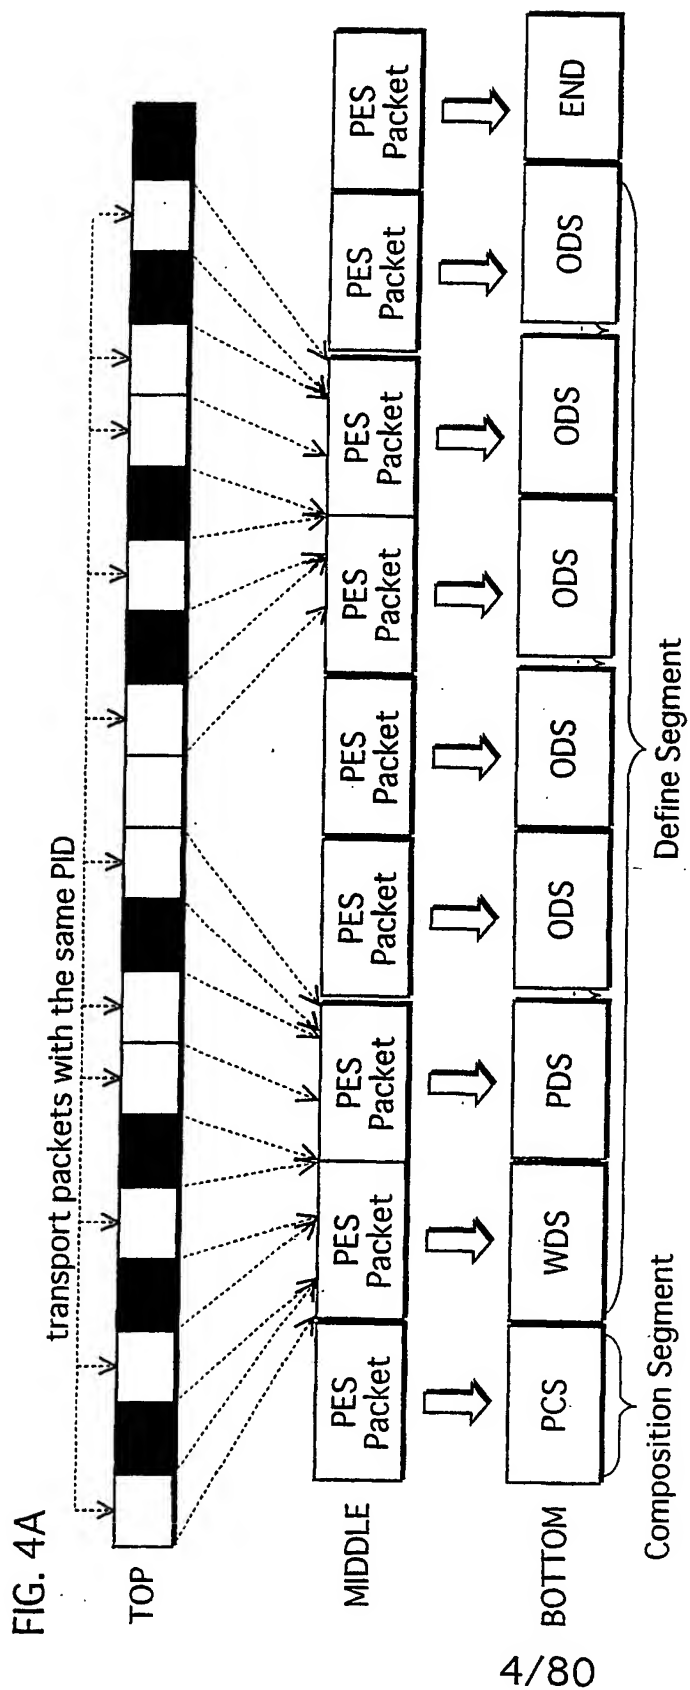


FIG. 5

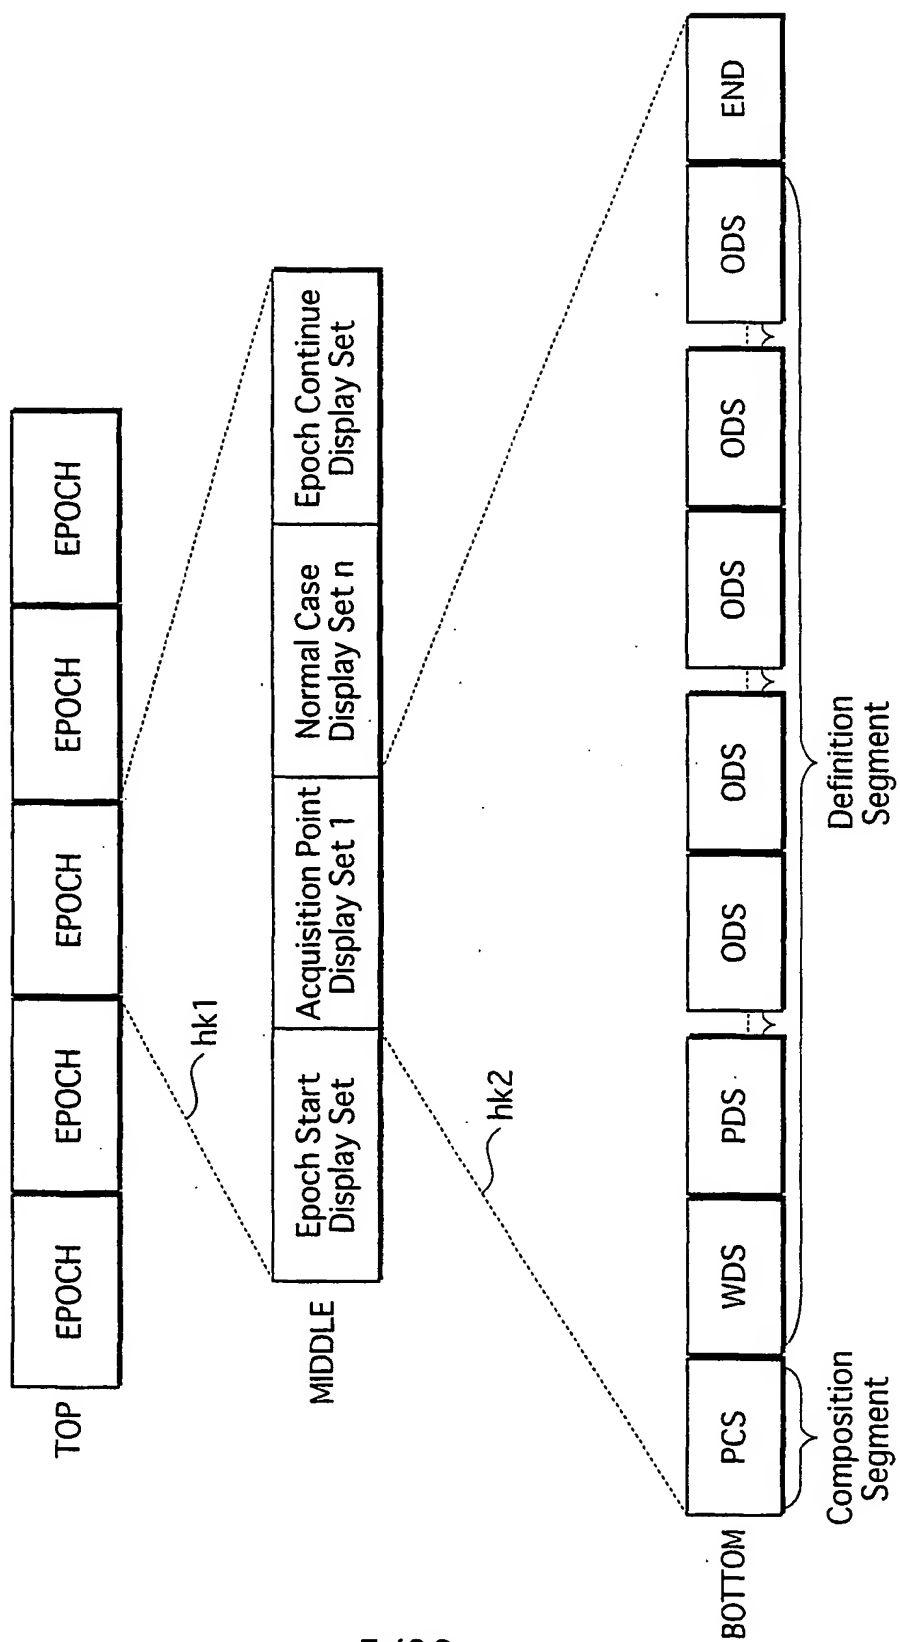


FIG. 6

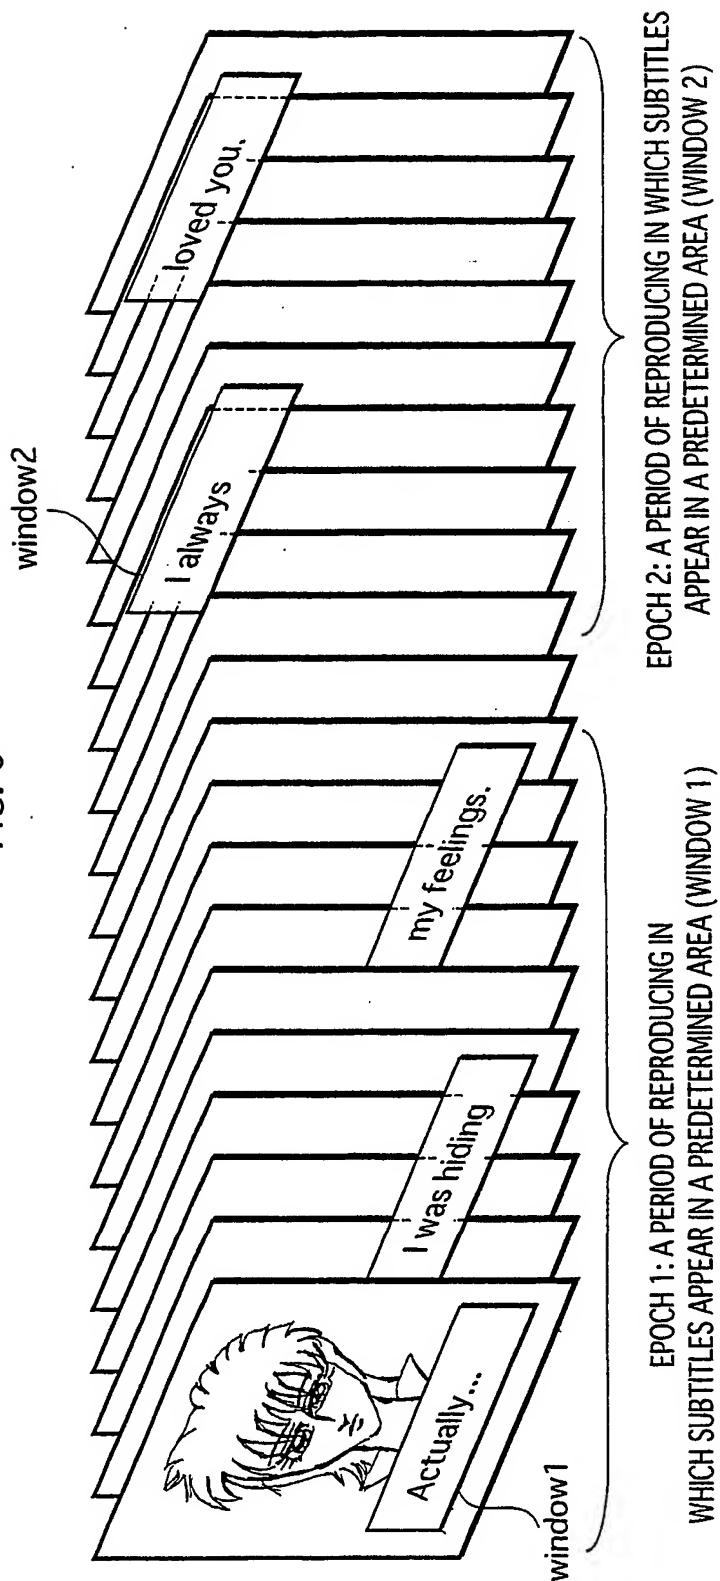


FIG. 7A

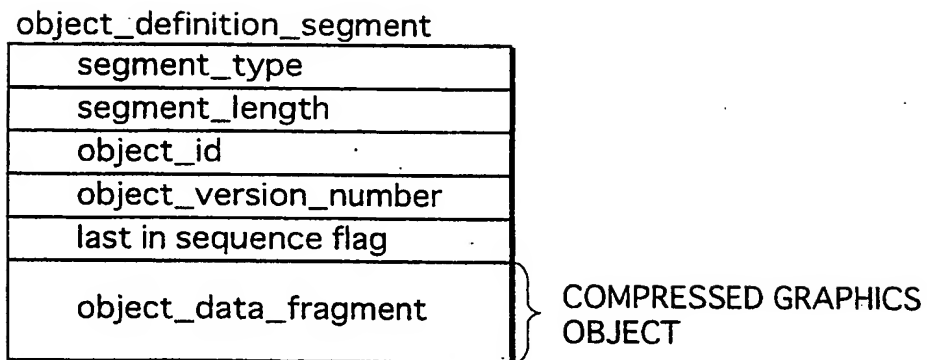


FIG. 7B

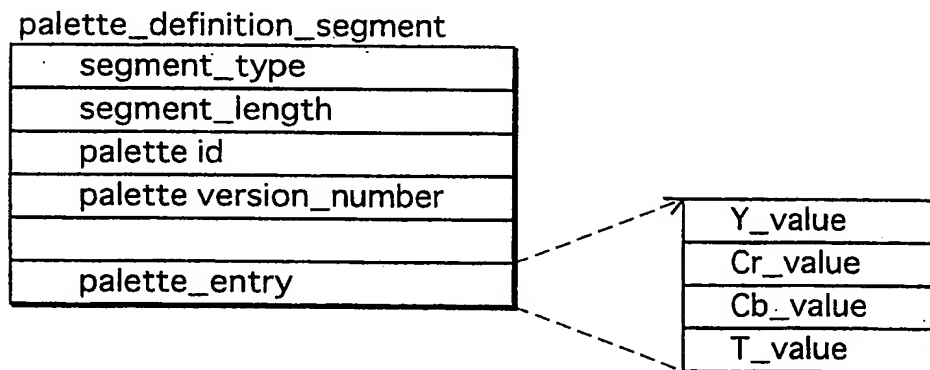


FIG. 8A

window_definition_segment	
window_id	
window_horizontal_position	
window_vertical_position	
window_width	
window_height	

FIG. 8B

presentation_composition_segment

segment_type	
segment_length	
composition_number	
composition_state	
palette_update_flag	
palette_id	
window_information(1)	
window_information(2)	
:	
window_information(i)	
:	
window_information(m)	

wd1

object_id	
window_id	
object_cropped_flag	
object_horizontal_position	
object_vertical_position	
cropping_rectangle_information(1)	
cropping_rectangle_information(2)	
:	
cropping_rectangle_information(i)	
:	
cropping_rectangle_information(n)	

wd2

object_cropping_horizontal_position	
object_cropping_vertical_position	
object_cropping_width	
object_cropping_height	

FIG. 9

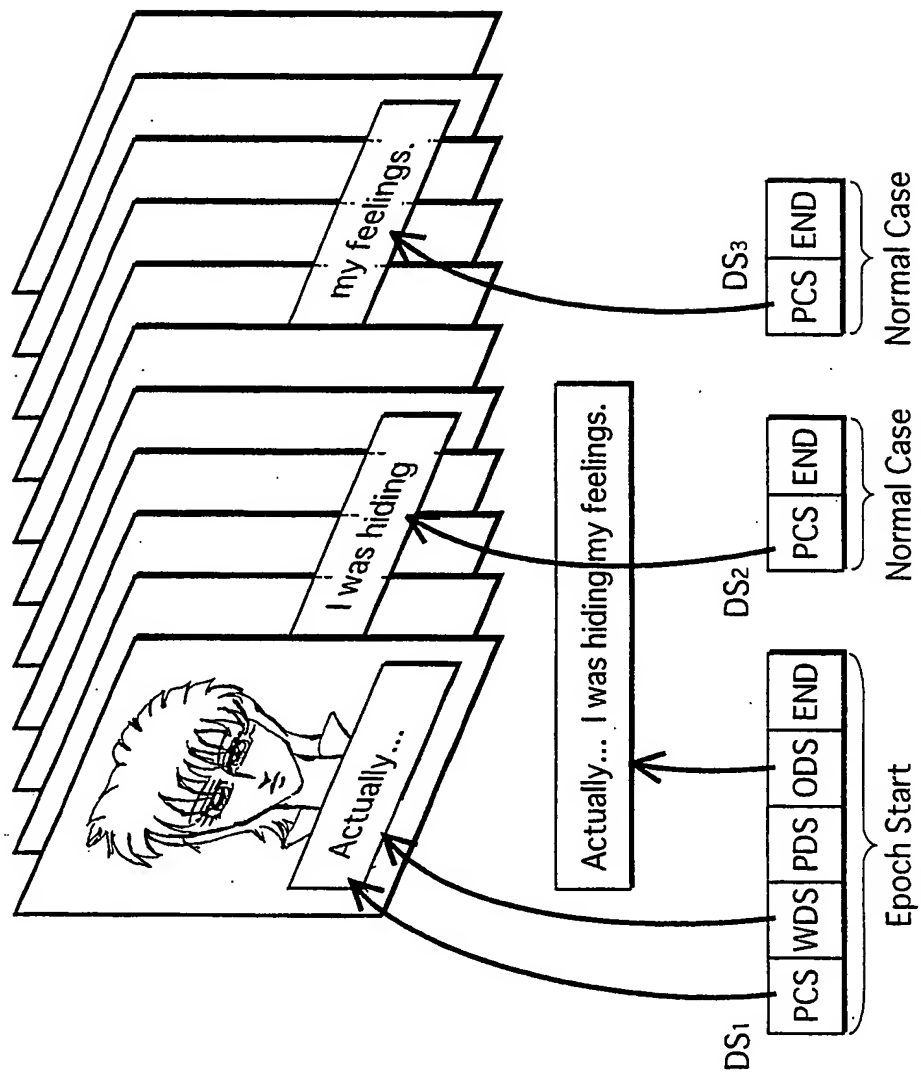


FIG. 10

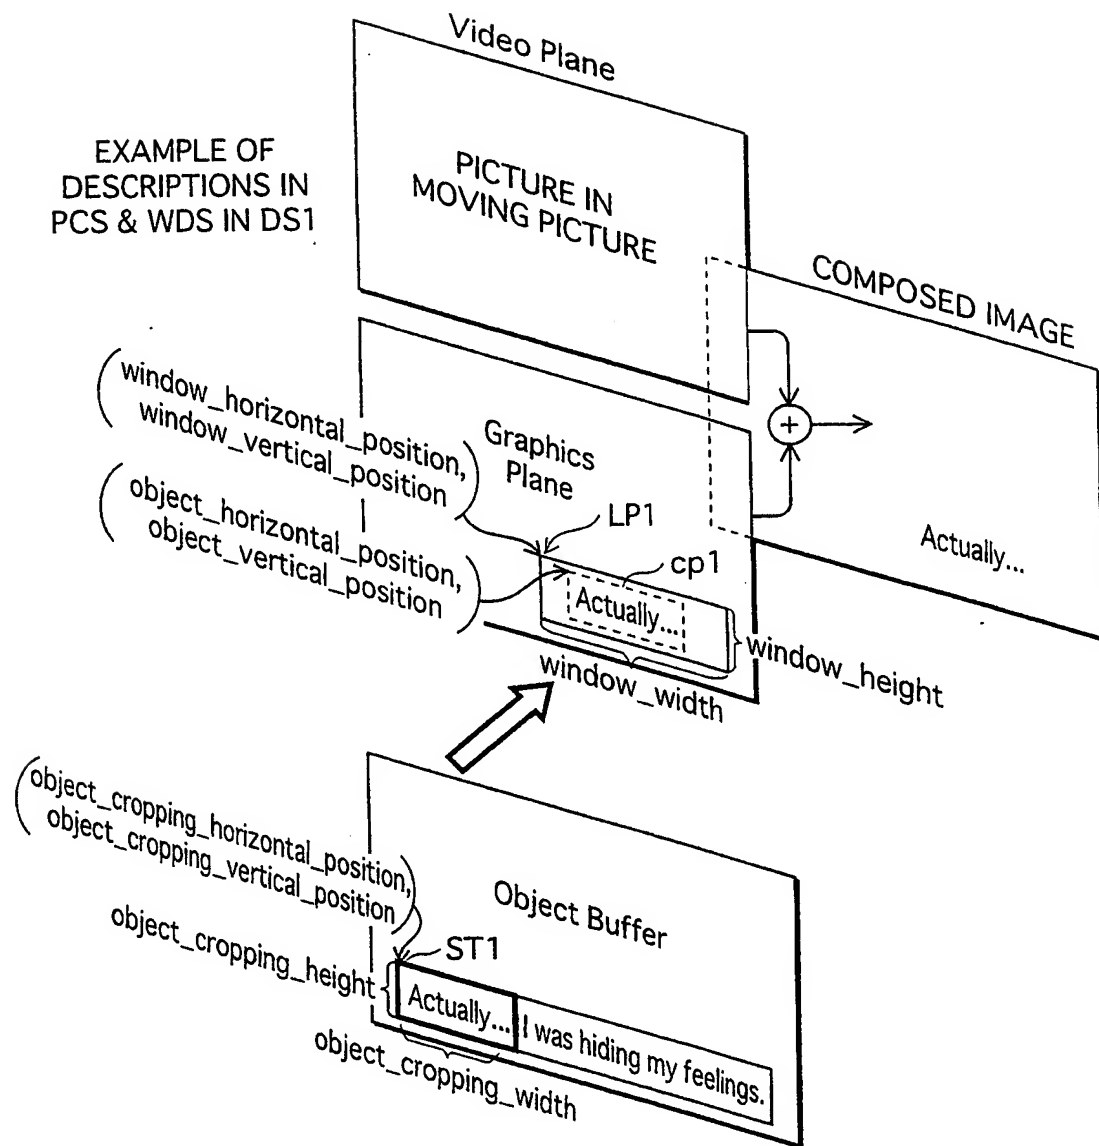


FIG. 11

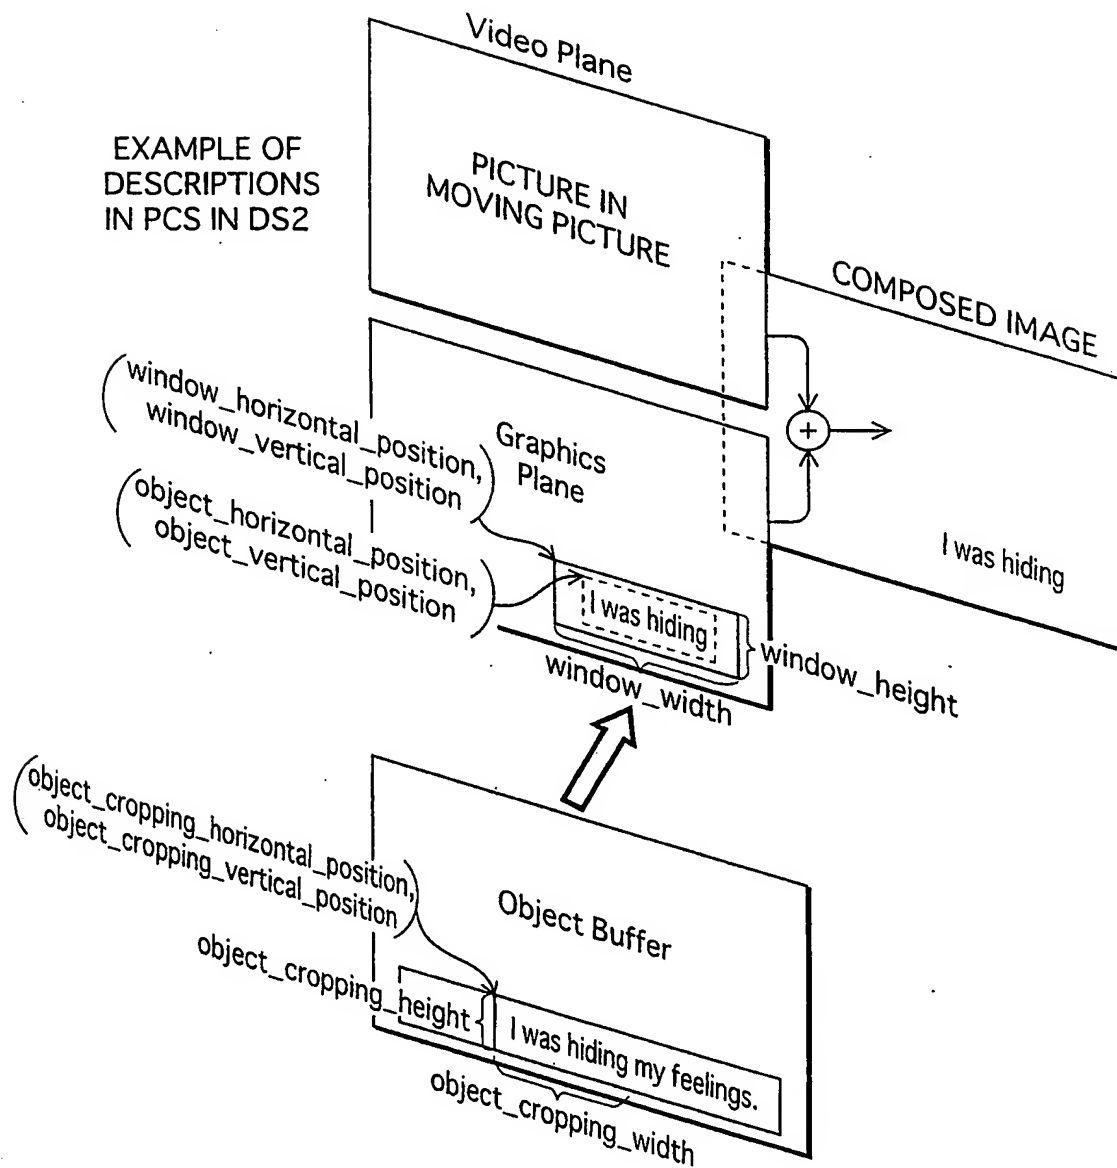
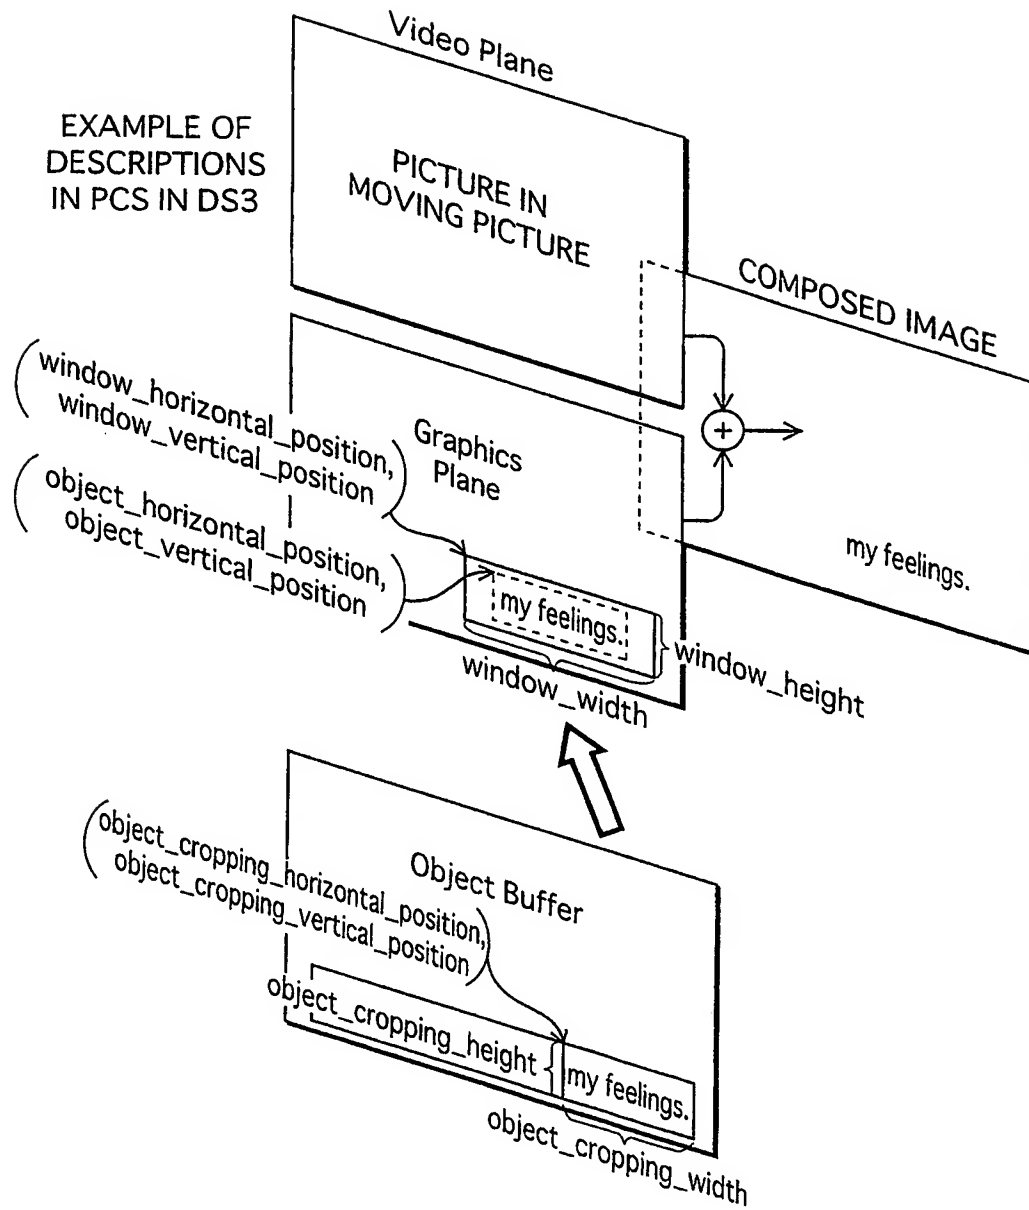
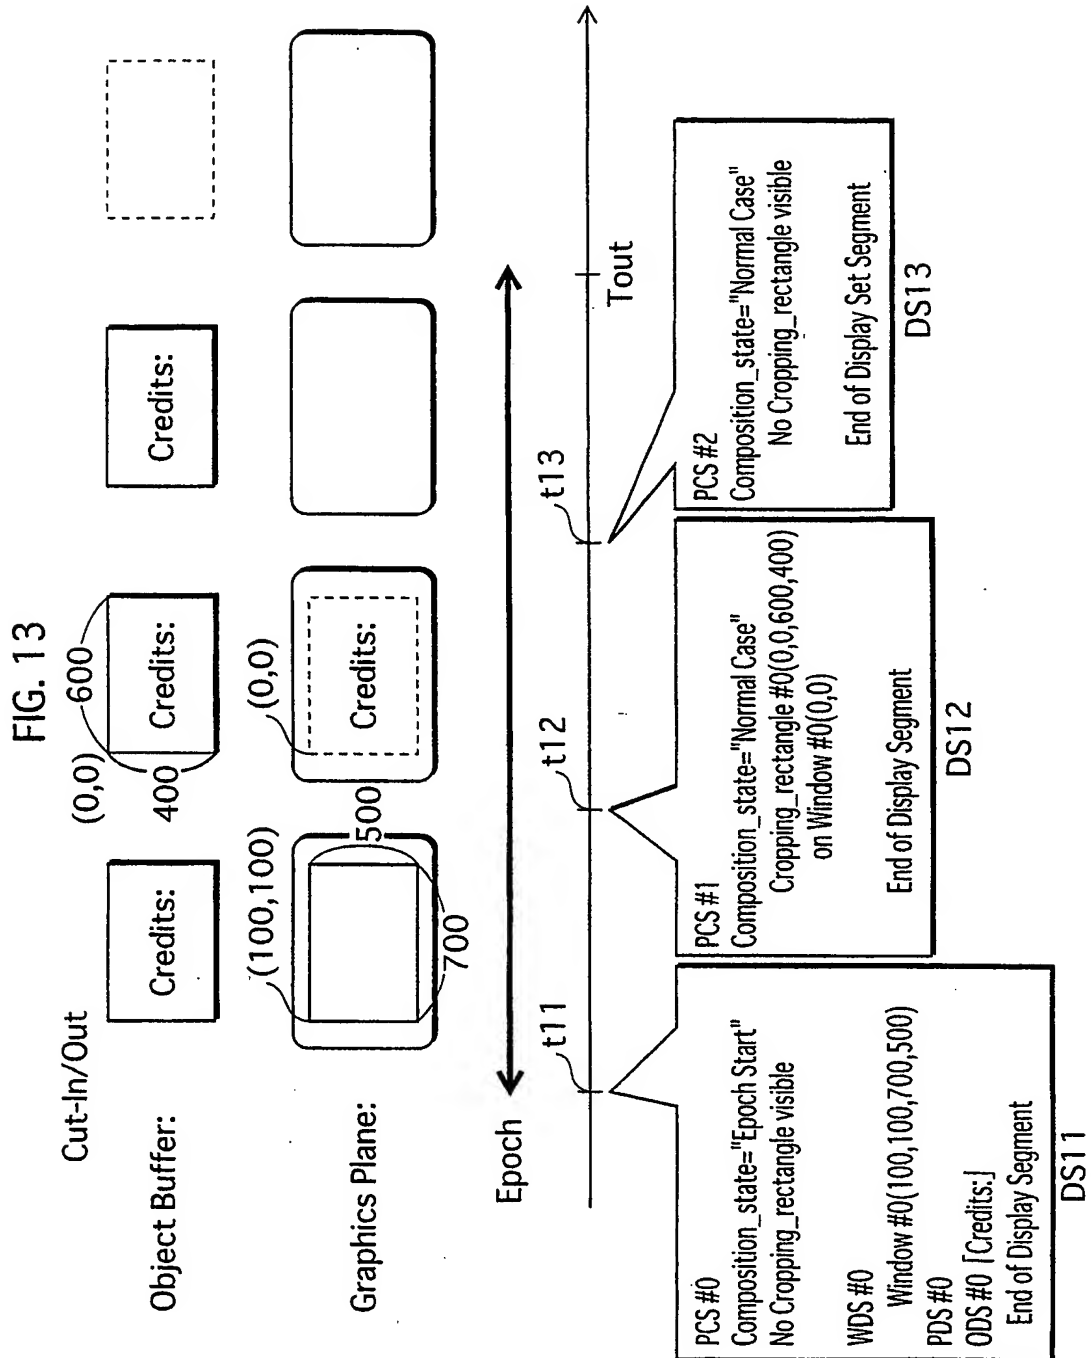


FIG. 12





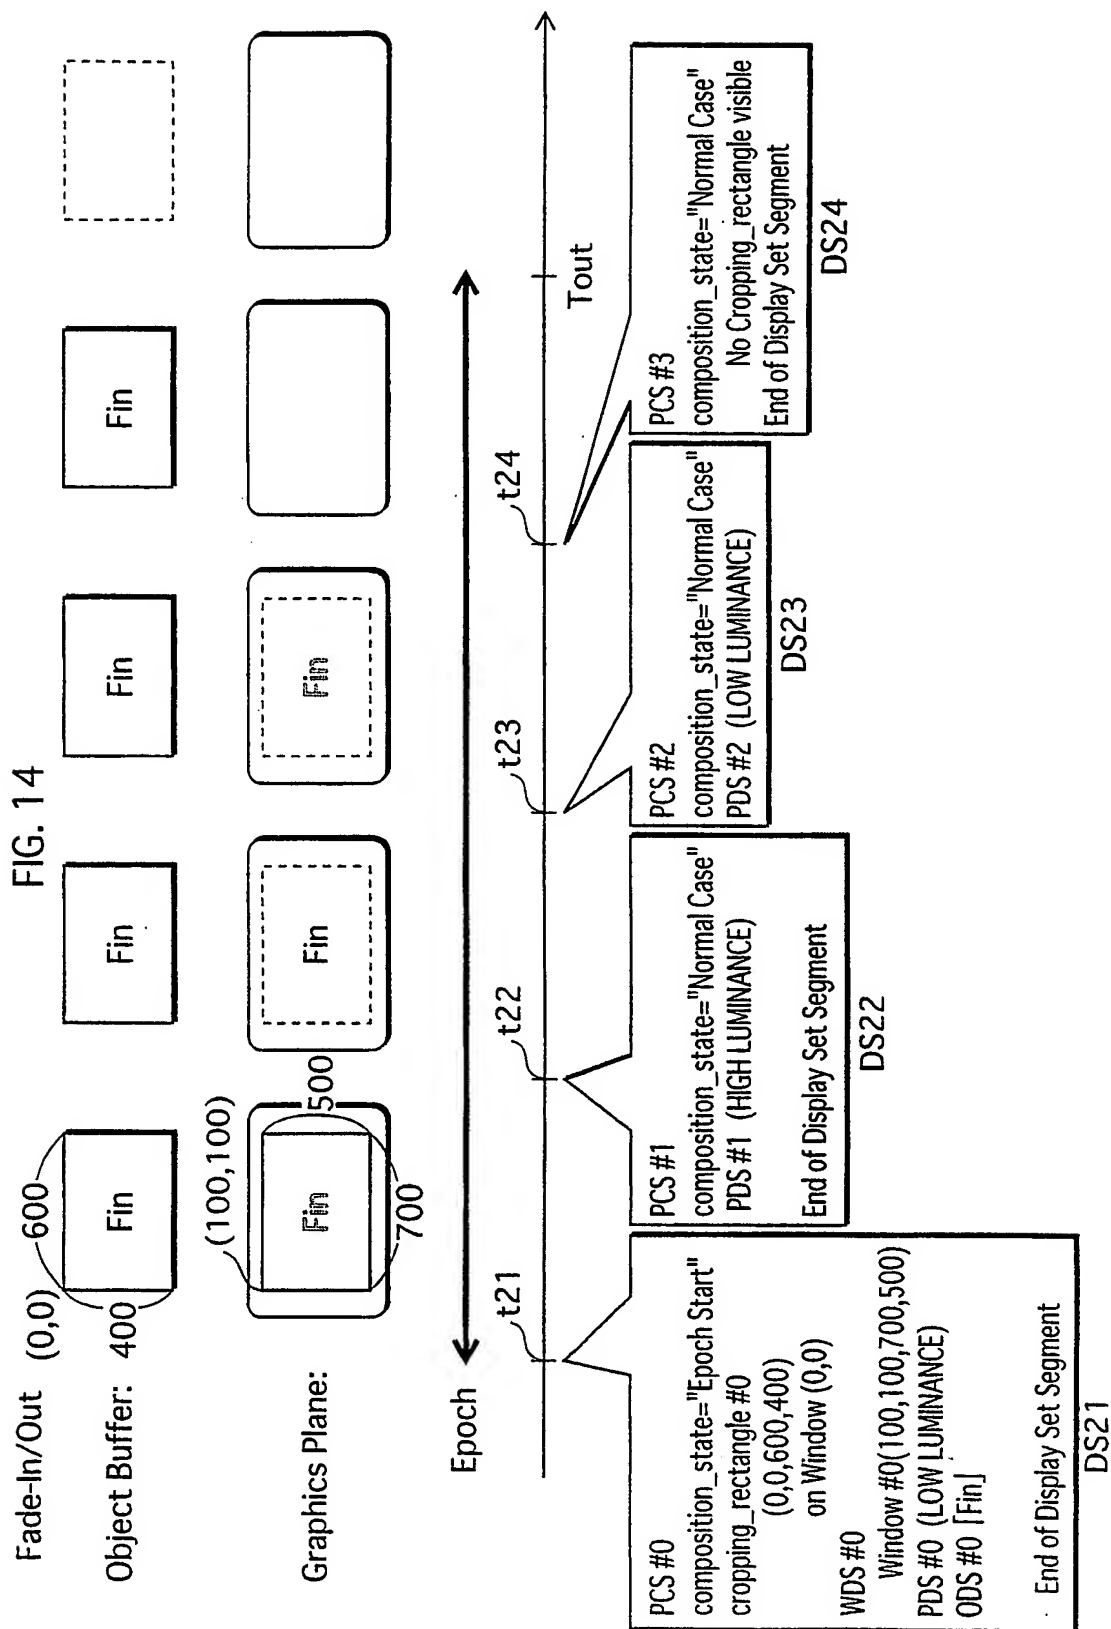


FIG. 15

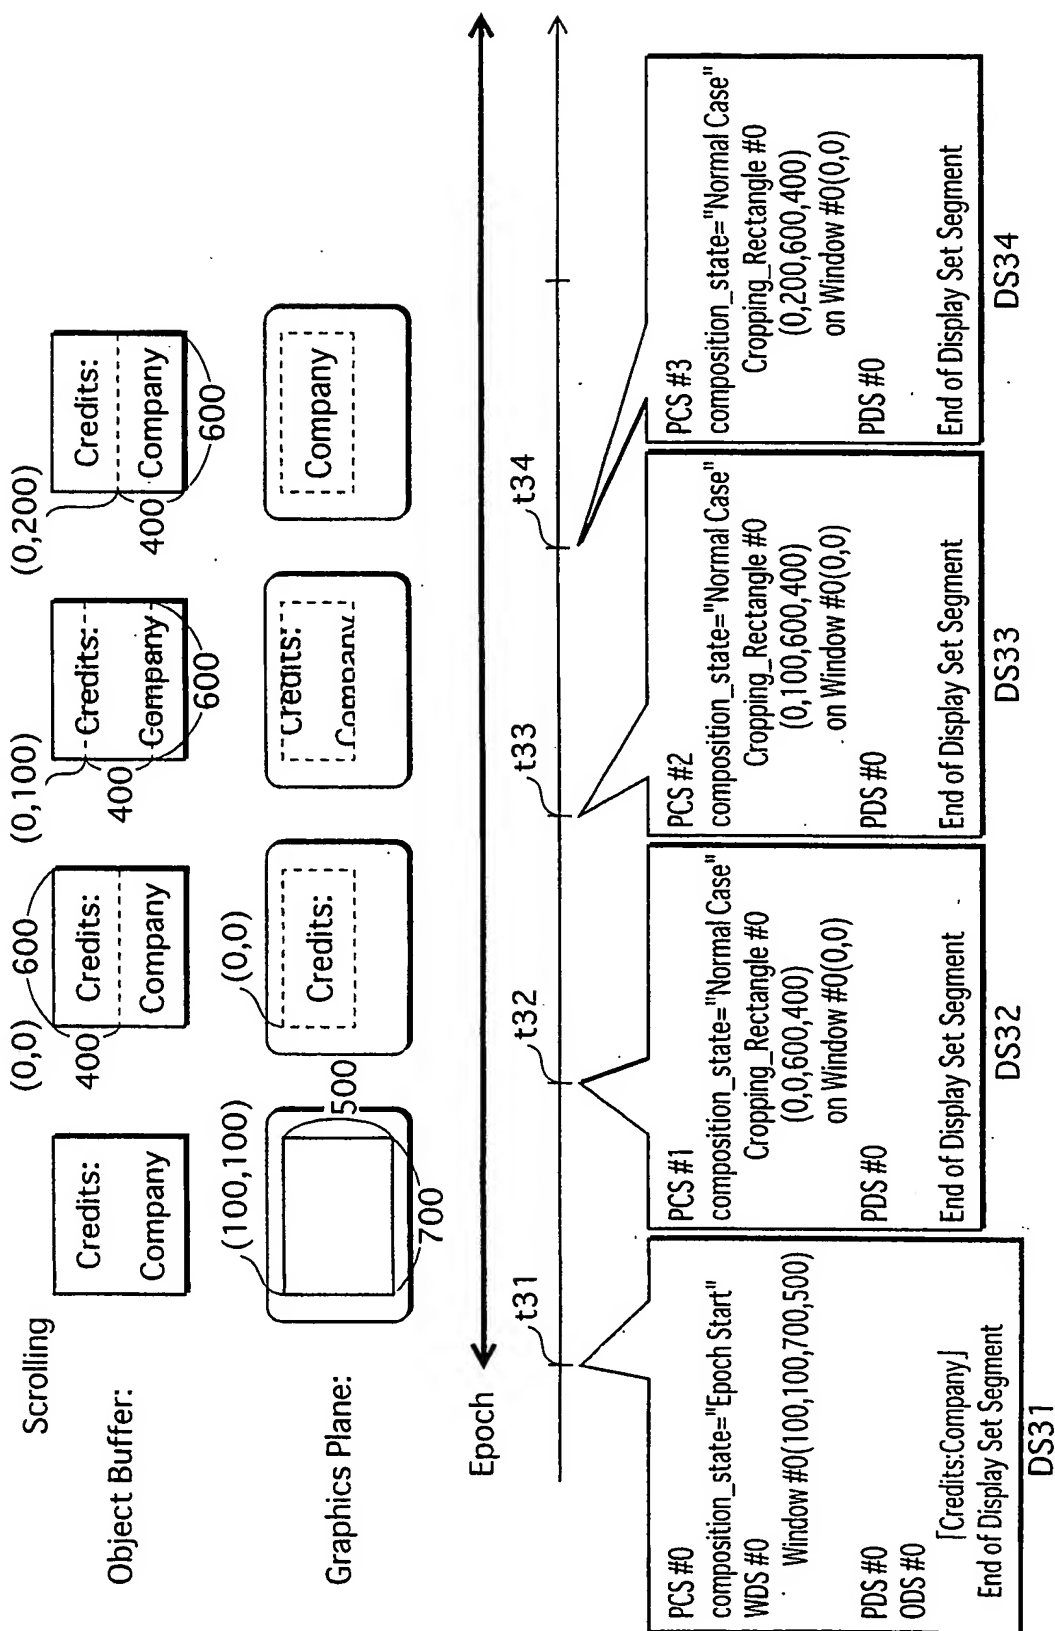


FIG. 16

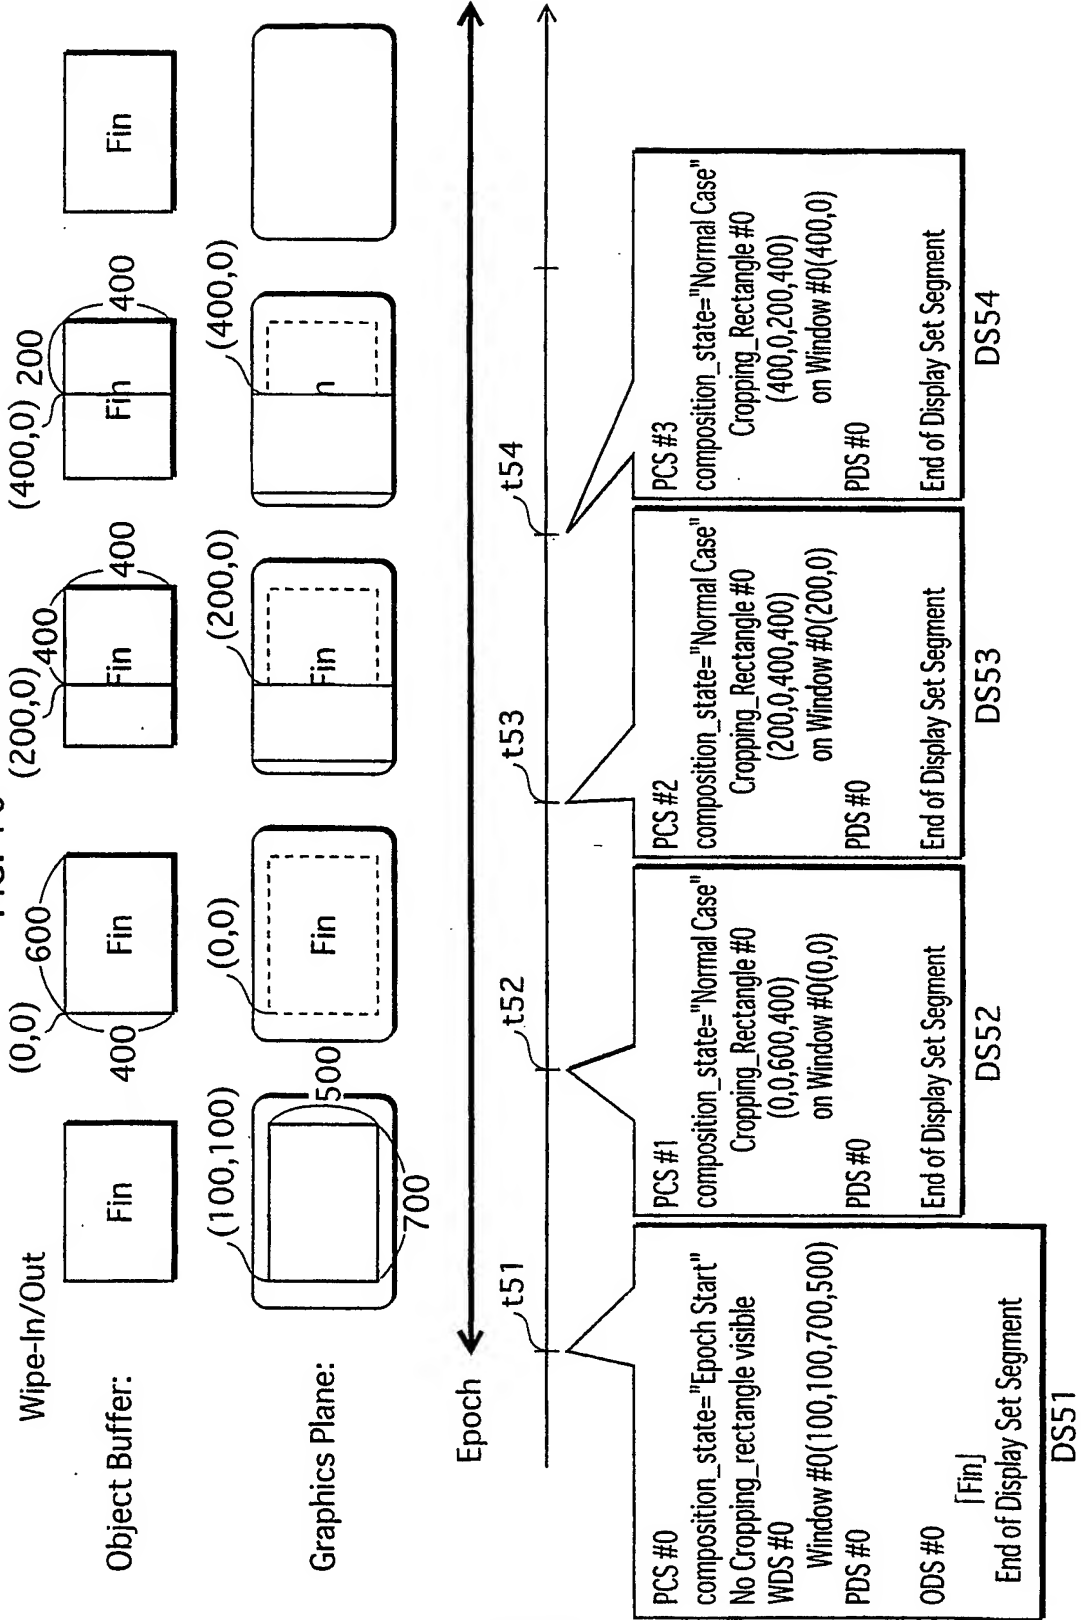


FIG. 17

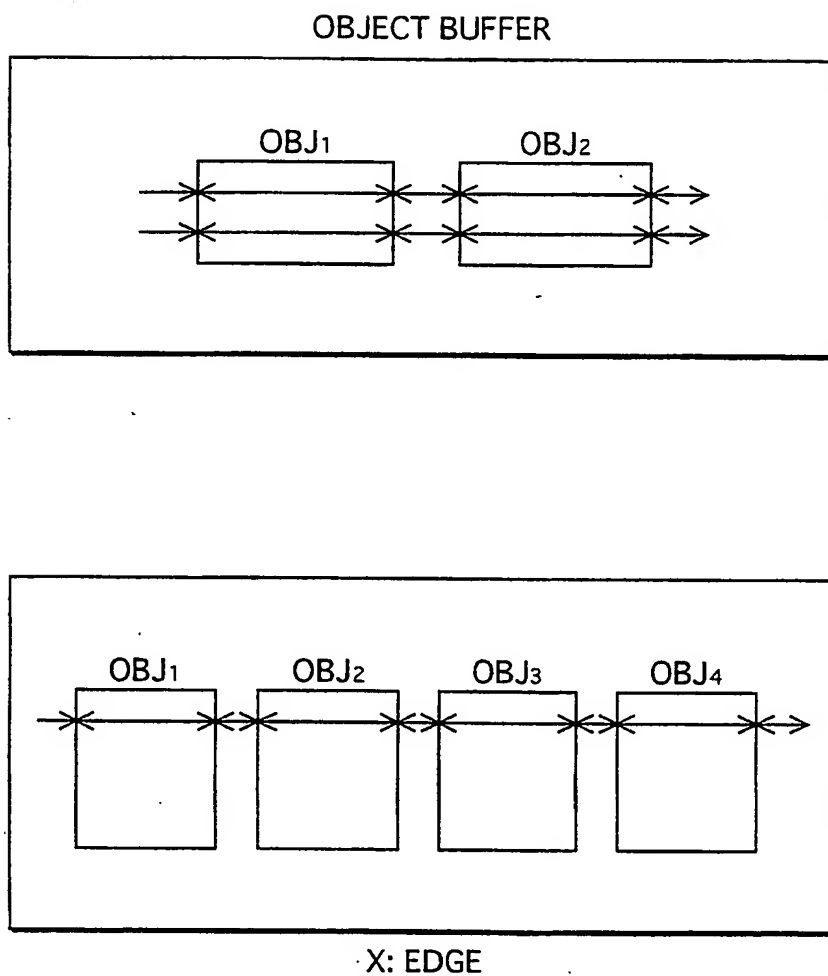


FIG. 18

$PTS(DSn[PCS]) \geq DTS(DSn[PCS]) + DECODEDURATION(DSn)$

Where:

- $DECODEDURATION(DSn)$ is calculated as follows:

```

decode_duration = 0 ;
decode_duration += PLANEINITIALIZATIONTIME( DSn ) ;
if( DSn. PCS. num_of_objects == 2 )
{
    decode_duration += WAIT( DSn, DSn. PCS. OBJ[0], decode_duration ) ;
    if( DSn. PCS. OBJ[0]. window_id == DSn. PCS. OBJ[1]. window_id )
    {
        decode_duration += WAIT( DSn, DSn. PCS. OBJ[1], decode_duration ) ;
        decode_duration += 90000*( SIZE( DSn. PCS. OBJ[0]. window_id )//256*106 ) ;
    }
    else
    {
        decode_duration += 90000*( SIZE( DSn. PCS. OBJ[0]. window_id )//256*106 ) ;
        decode_duration += WAIT( DSn, DSn. PCS. OBJ[1], decode_duration ) ;
        decode_duration += 90000*( SIZE( DSn. PCS. OBJ[1]. window_id )//256*106 ) ;
    }
}
else if( DSn. PCS. num_of_objects == 1 )
{
    decode_duration += WAIT( DSn, DSn. PCS. OBJ[0], decode_duration ) ;
    decode_duration += 90000*( SIZE( DSn. PCS. OBJ[0]. window_id )//256*106 ) ;
}
return decode_duration ;

```

- $PLANEINITIALIZATIONTIME(DSn)$ is calculated as follows:

```

initialize_duration=0 ;
if( DSn. PCS. composition_state == EPOCH_START )
{
    initialize_duration = 90000*( 8*video_width*video_height//256*106 ) ;
}
else
{
    for( i=0 ; i < WDS. num_windows ; i++ )
    {
        if( EMPTY(DSn.WDS.WIN[i],DSn) )
            initialize_duration += 90000*( SIZE( DSn. WDS. WIN[i] )//256*106 ) ;
    }
}
return initialize_duration ;

```

- $WAIT(DSn, OBJ, current_duration)$ is calculated as follows:

```

wait_duration = 0 ;
if( EXISTS( OBJ. object_id, DSn ) )
{
    object_definition_ready_time = PTS( GET( OBJ. object_id, DSn ) ) ;
    current_time = DTS( DSn. PCS )+current_duration ;
    if( current_time < object_definition_ready_time )
        wait_duration += object_definition_ready_time - current_time ;
}
return wait_duration ;

```

FIG. 19

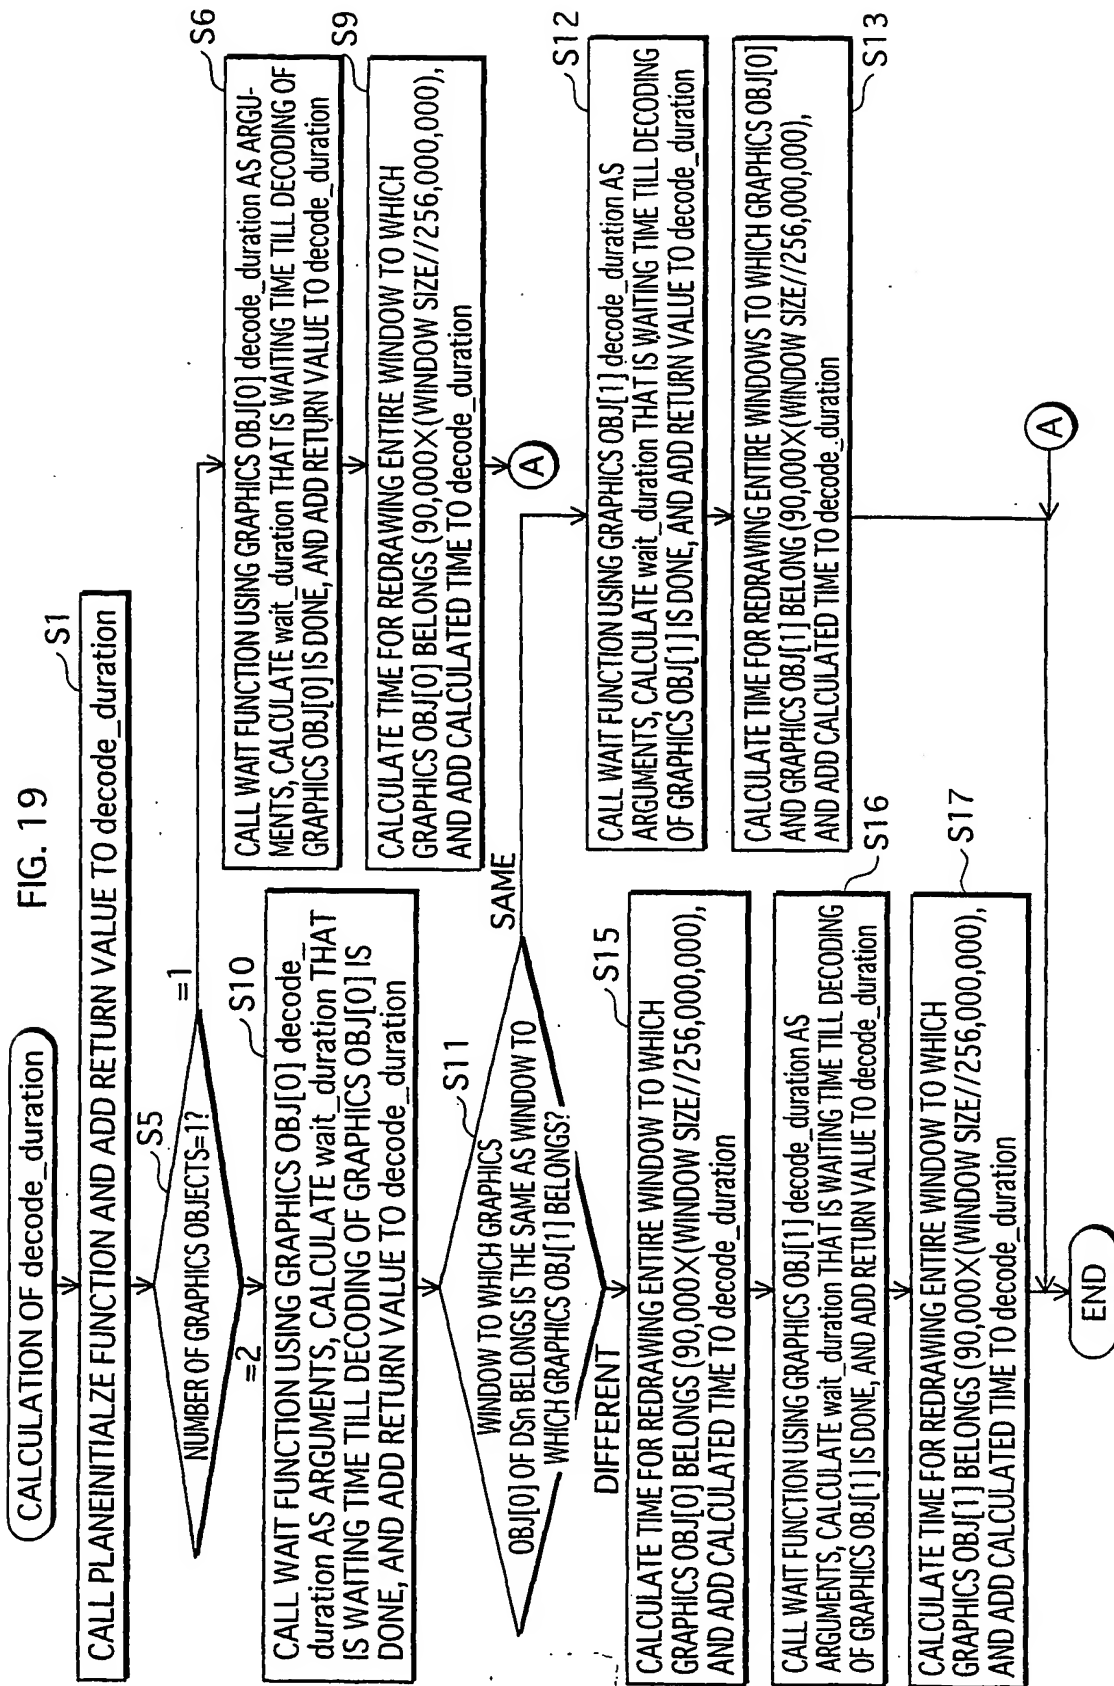


FIG. 20A

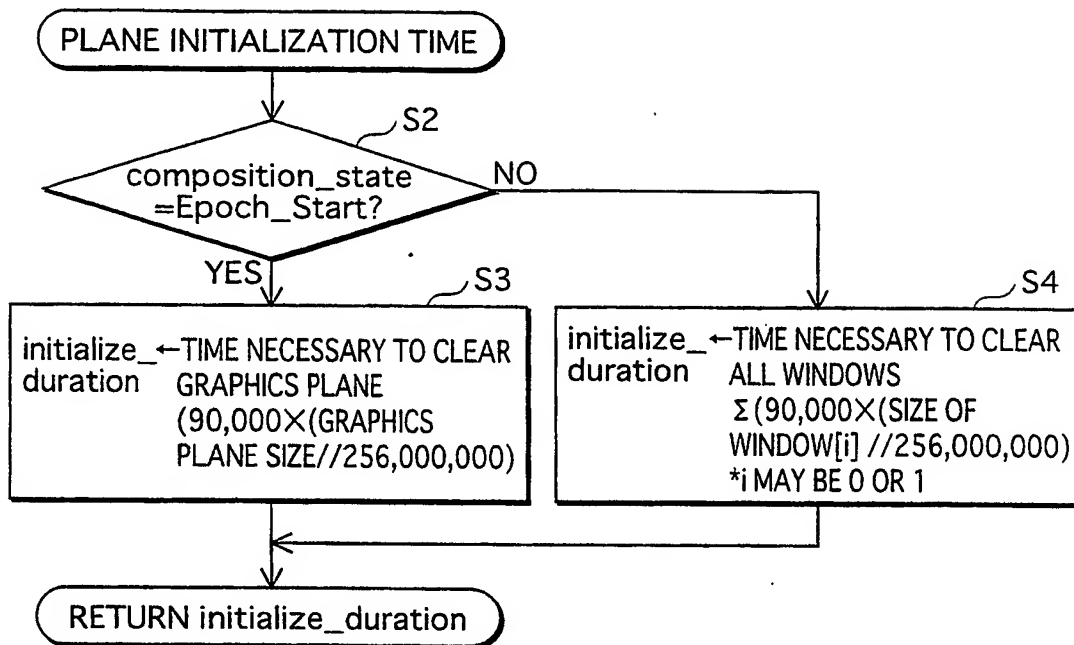


FIG. 20B

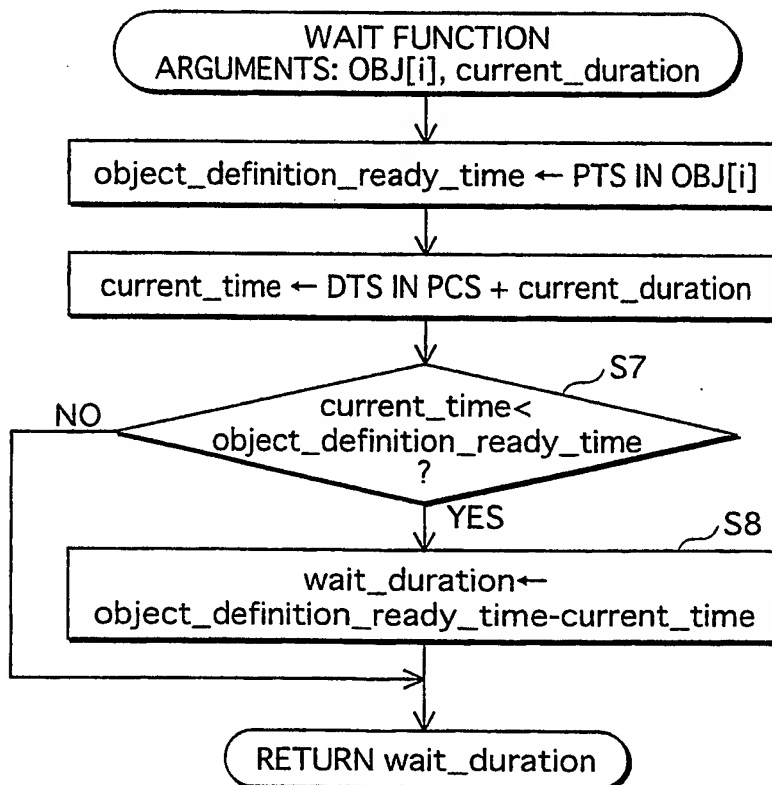


FIG. 21A

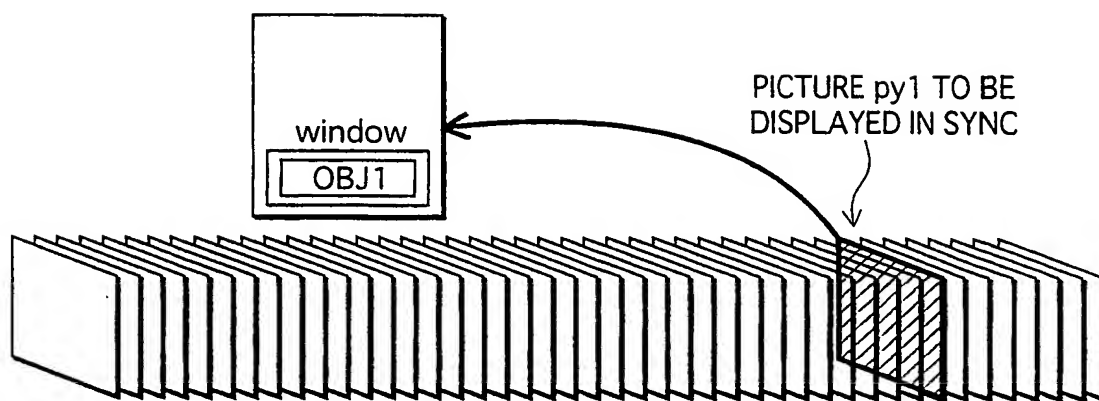


FIG. 21B.

DECODE_DURATION
=(2)+(3)

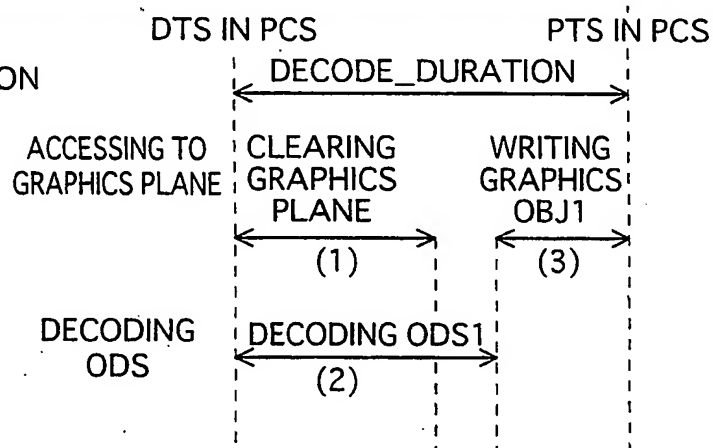


FIG. 21C

DECODE_DURATION
=(1)+(3)

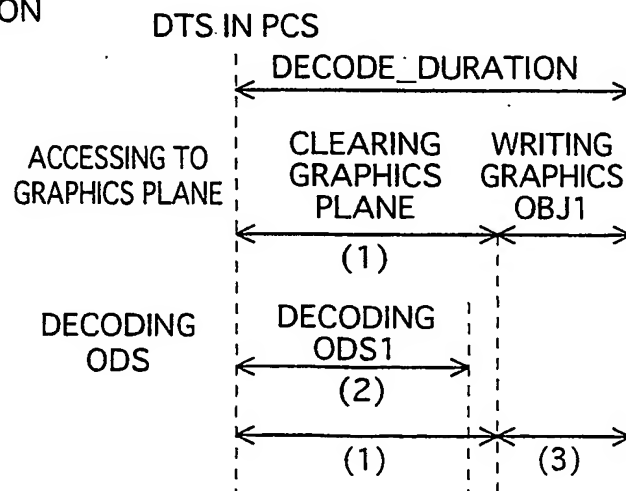


FIG. 22A

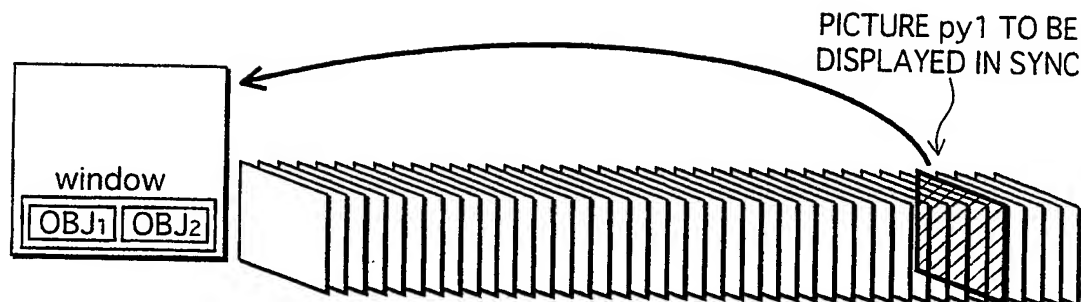


FIG. 22B

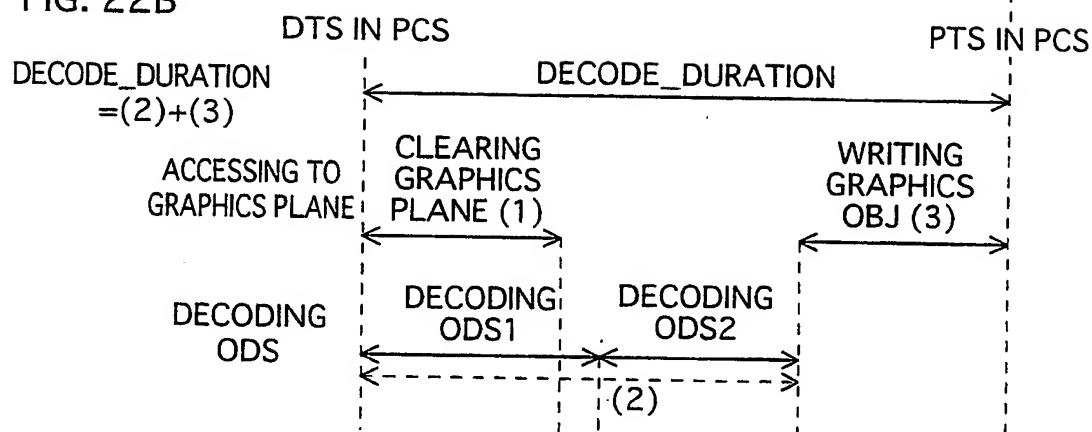
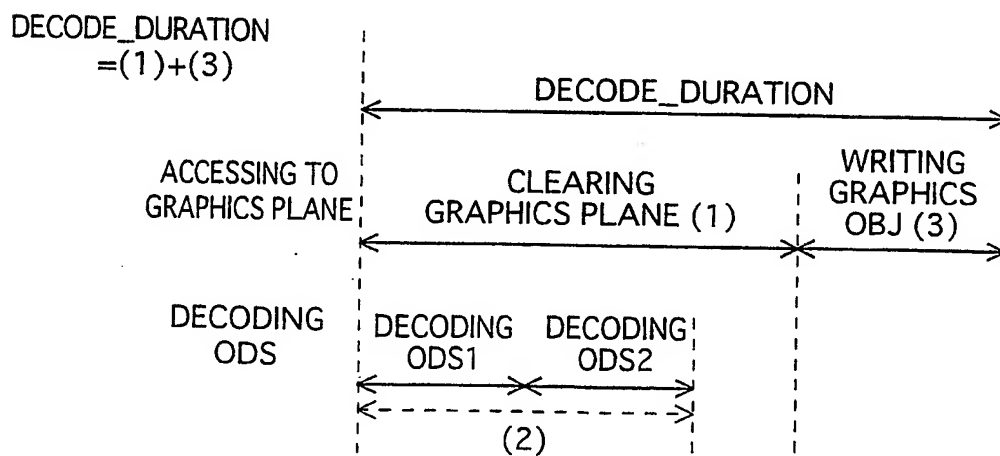


FIG. 22C



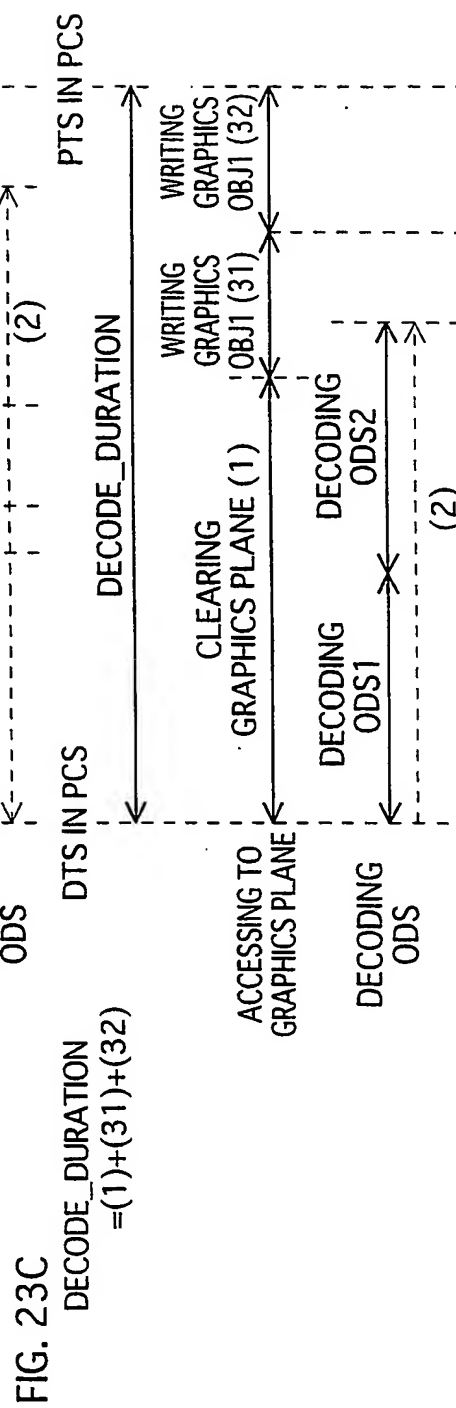
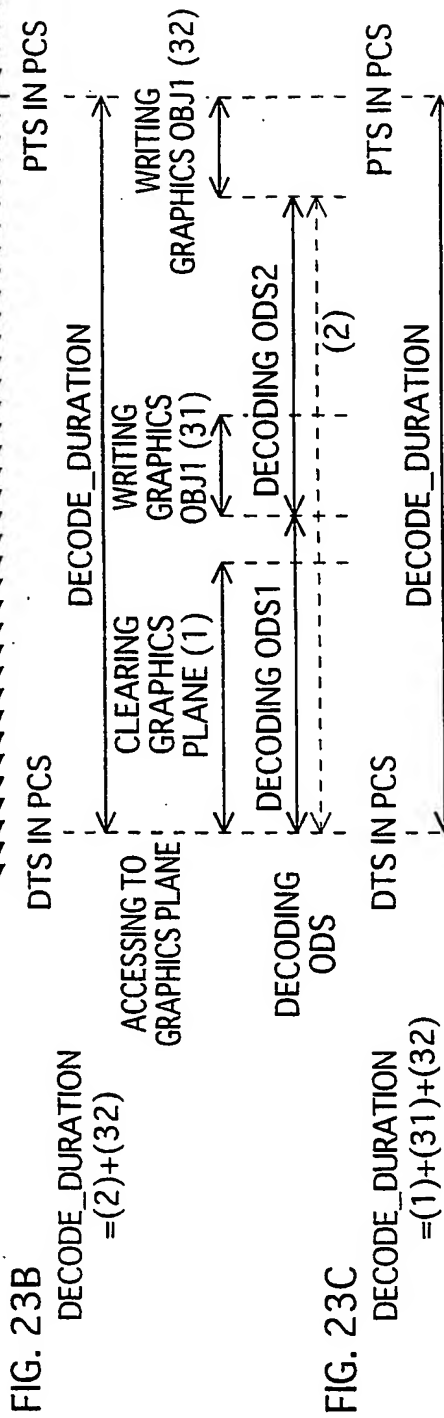
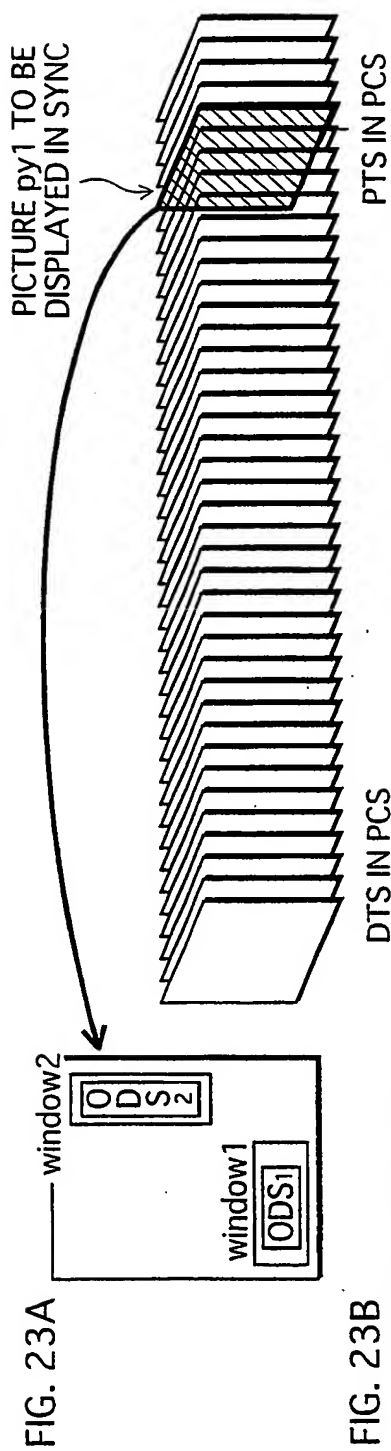


FIG. 24

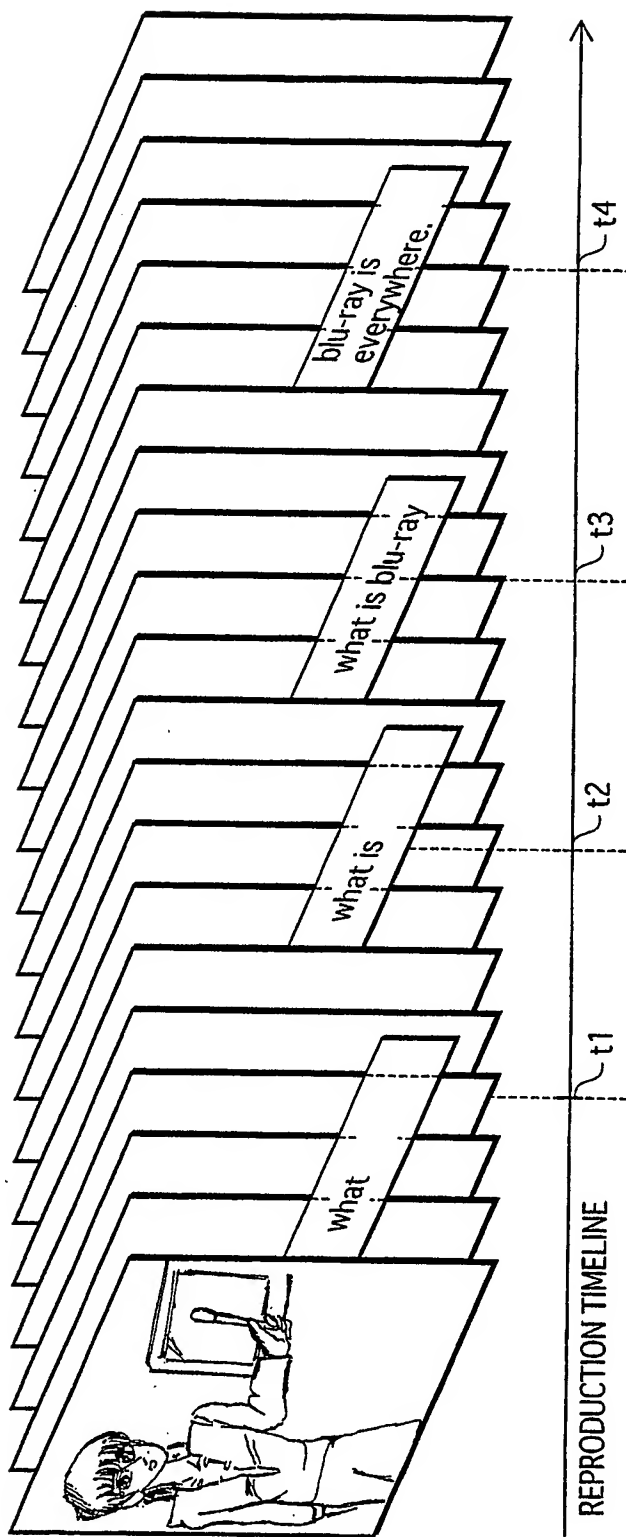


FIG. 25A

(DS1) PCS1.1-PDS1-ODS1-END

ODS1 "what is blu-ray"

(DS3) PCS1.3-END

(DS4) PCS2-ODS2-END

ODS2 "blu-ray is " everywhere

FIG. 25B

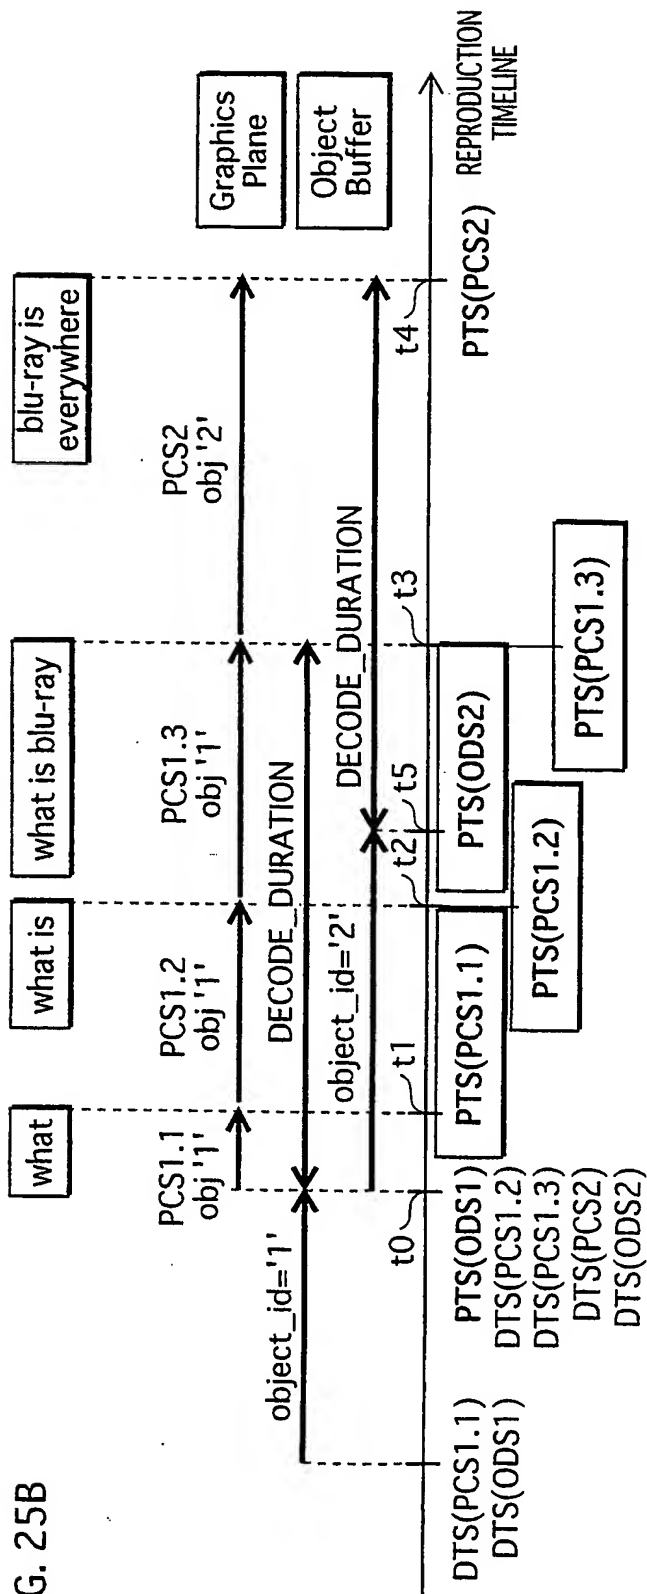


FIG. 26

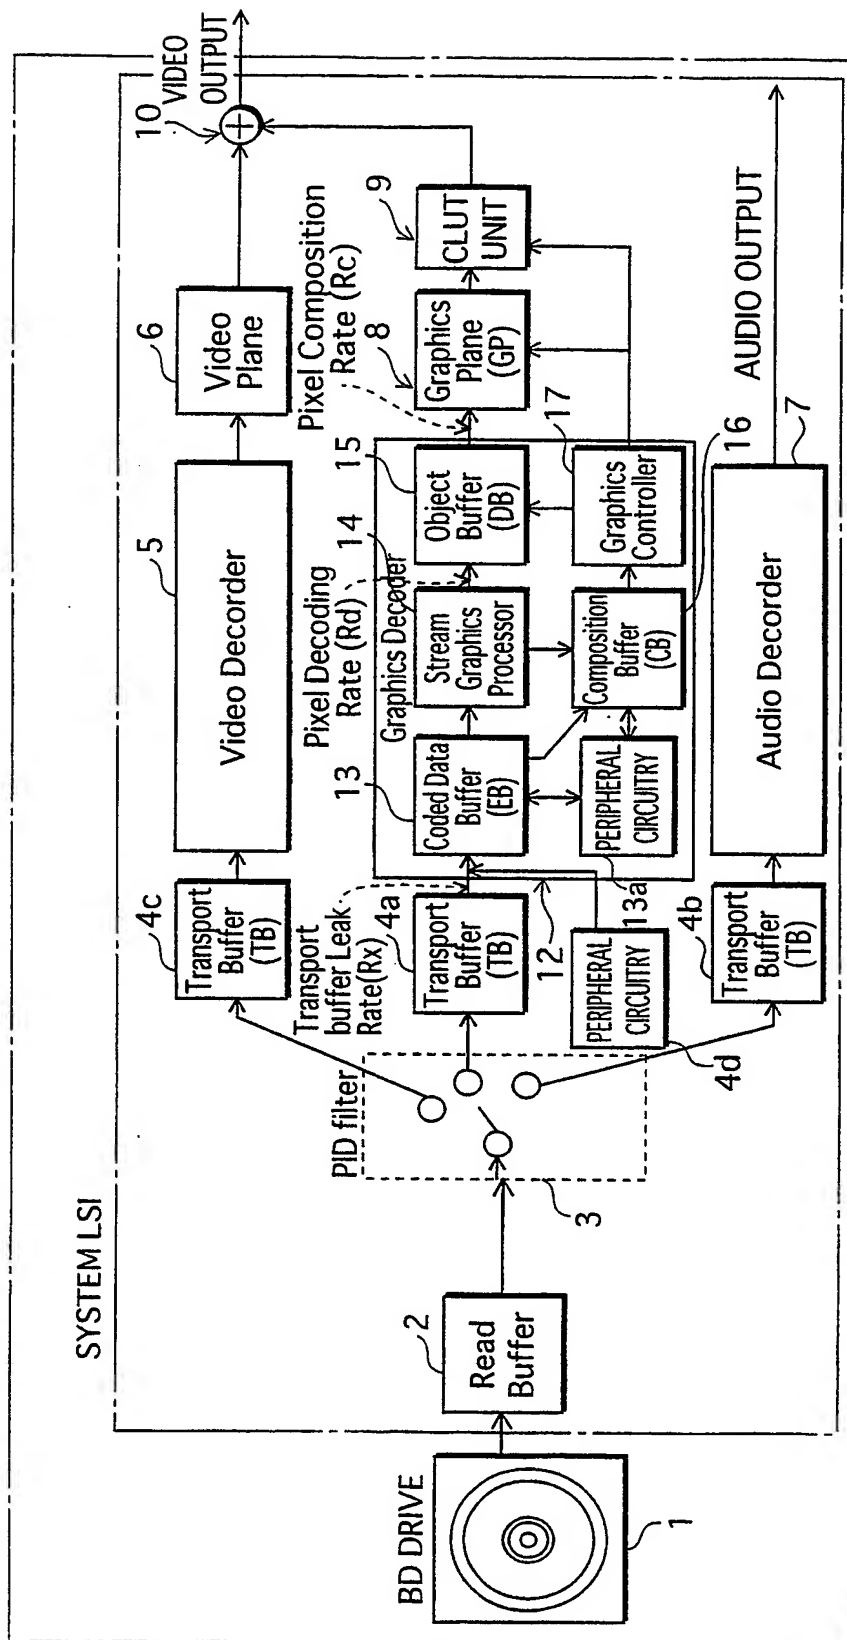
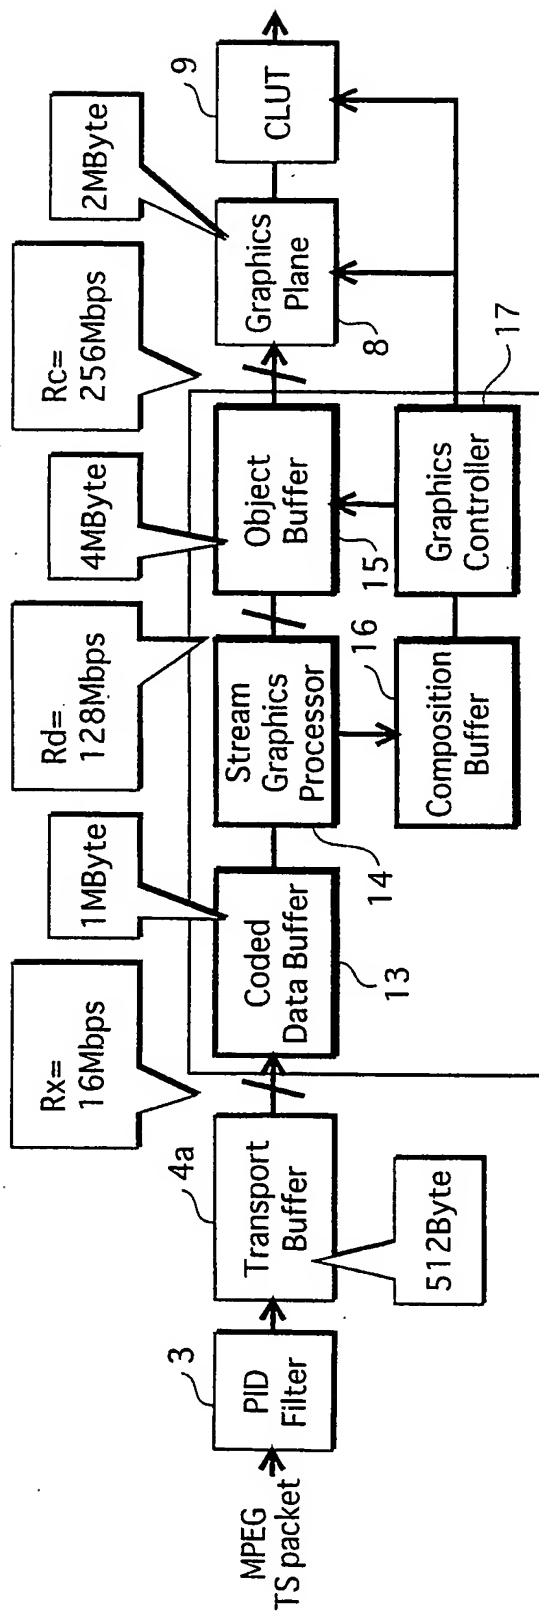
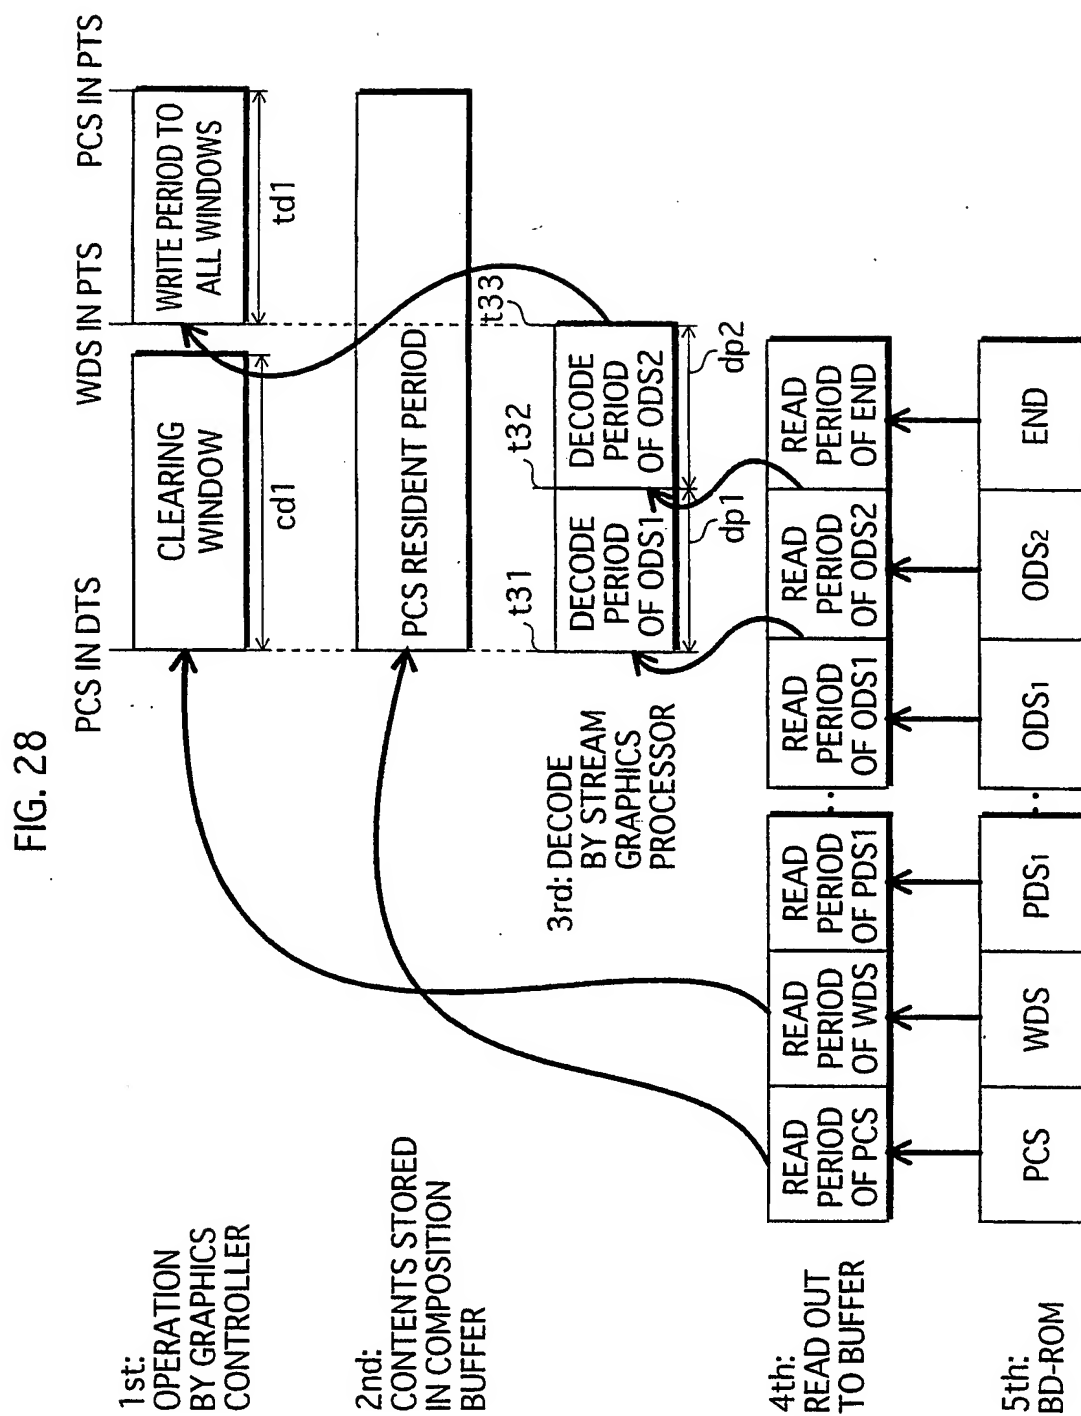
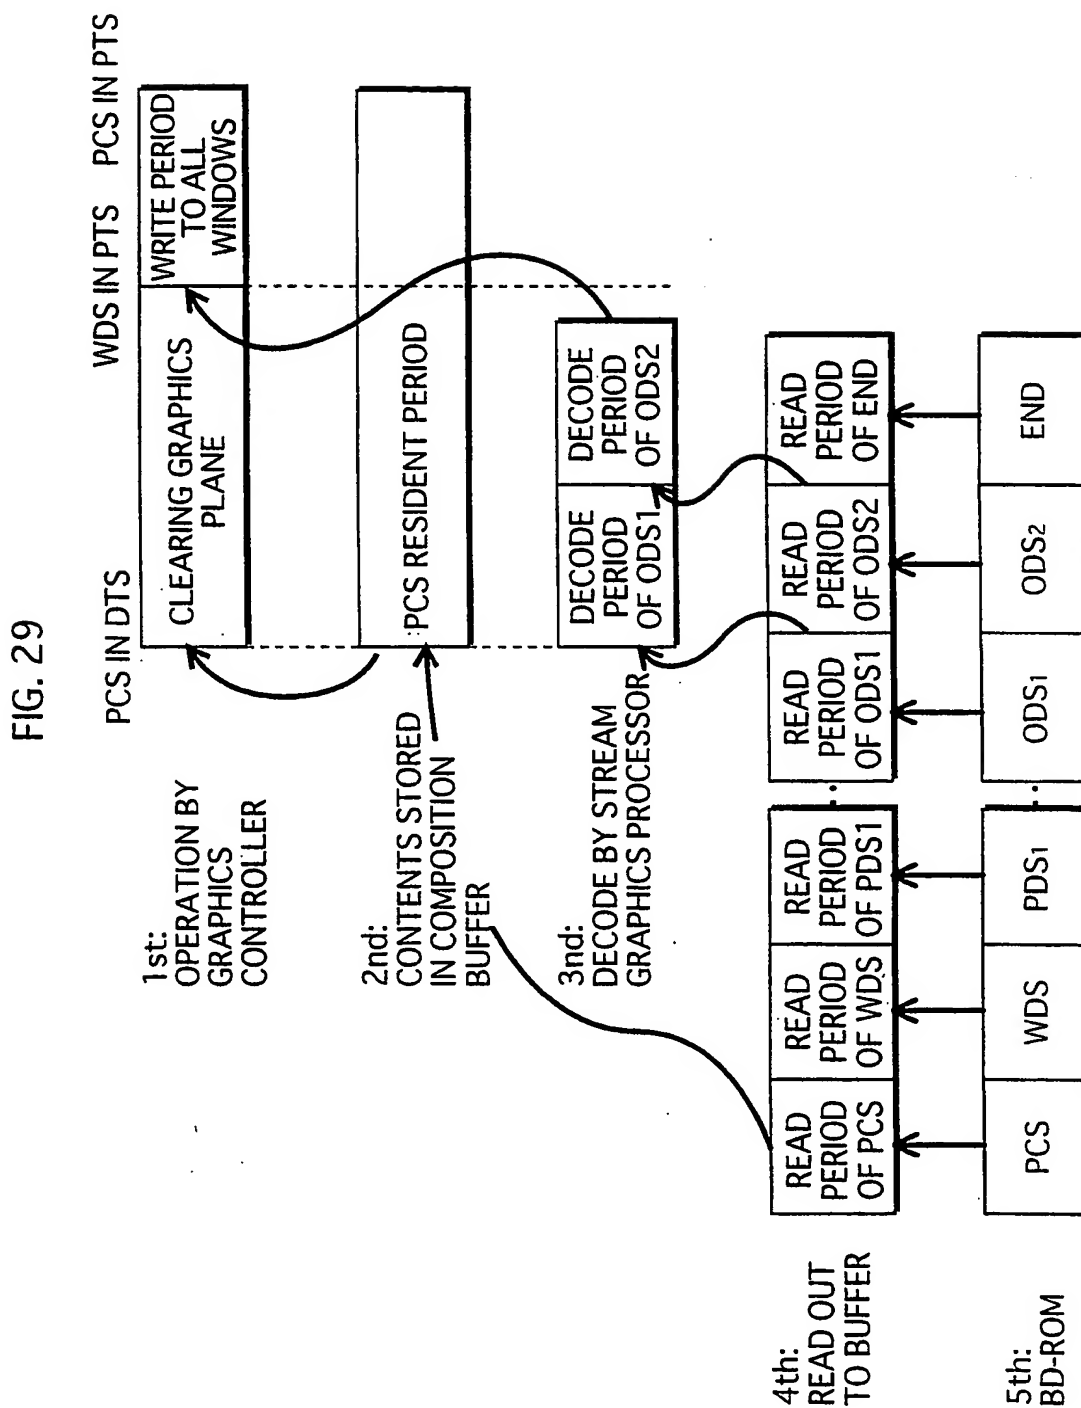


FIG. 27







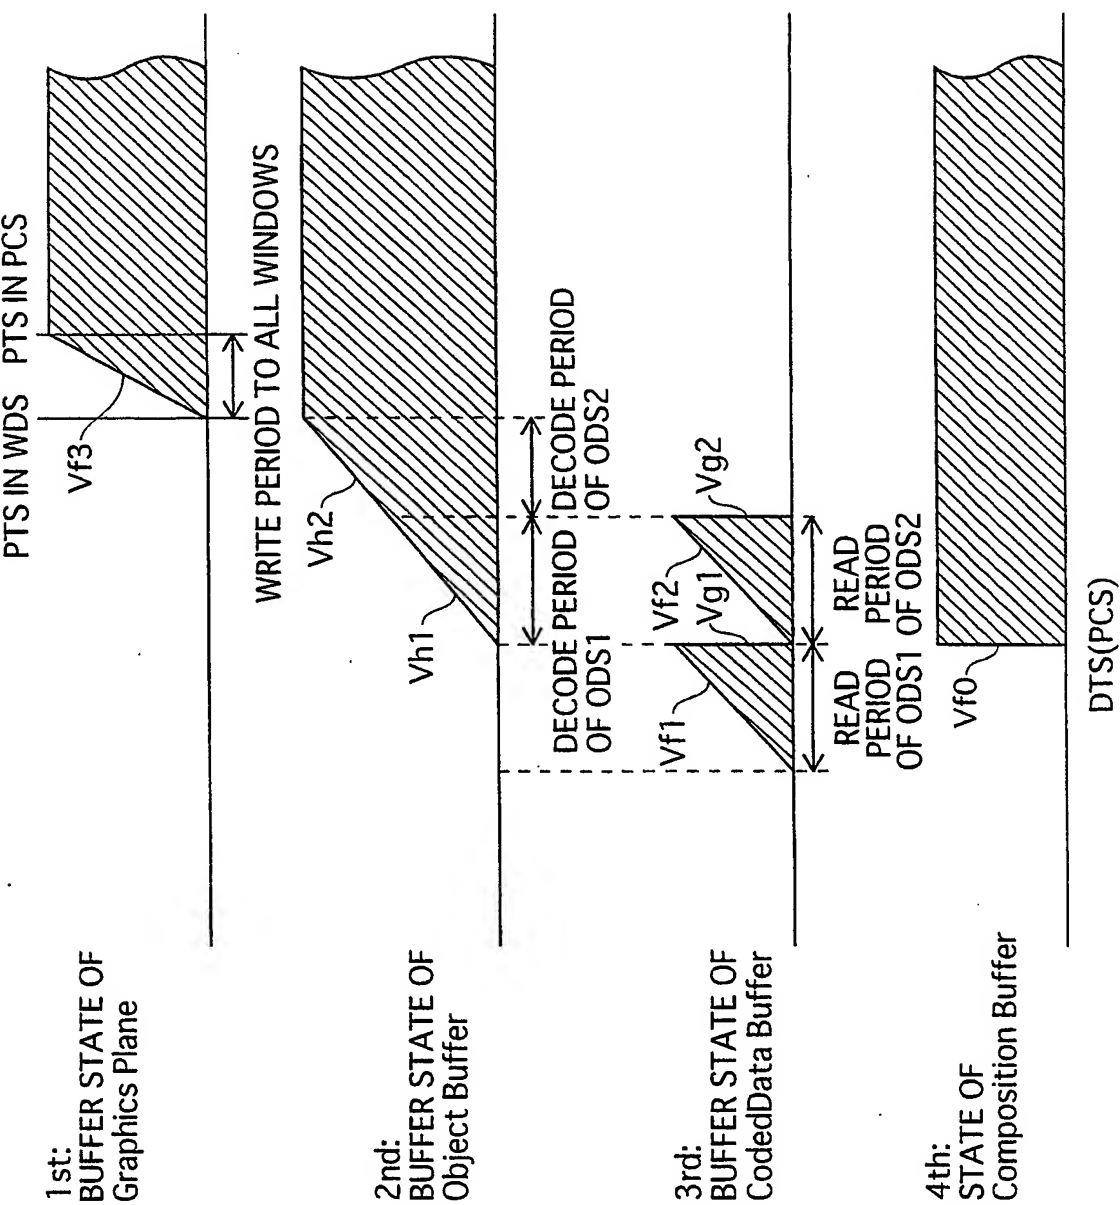


FIG. 30

FIG. 31

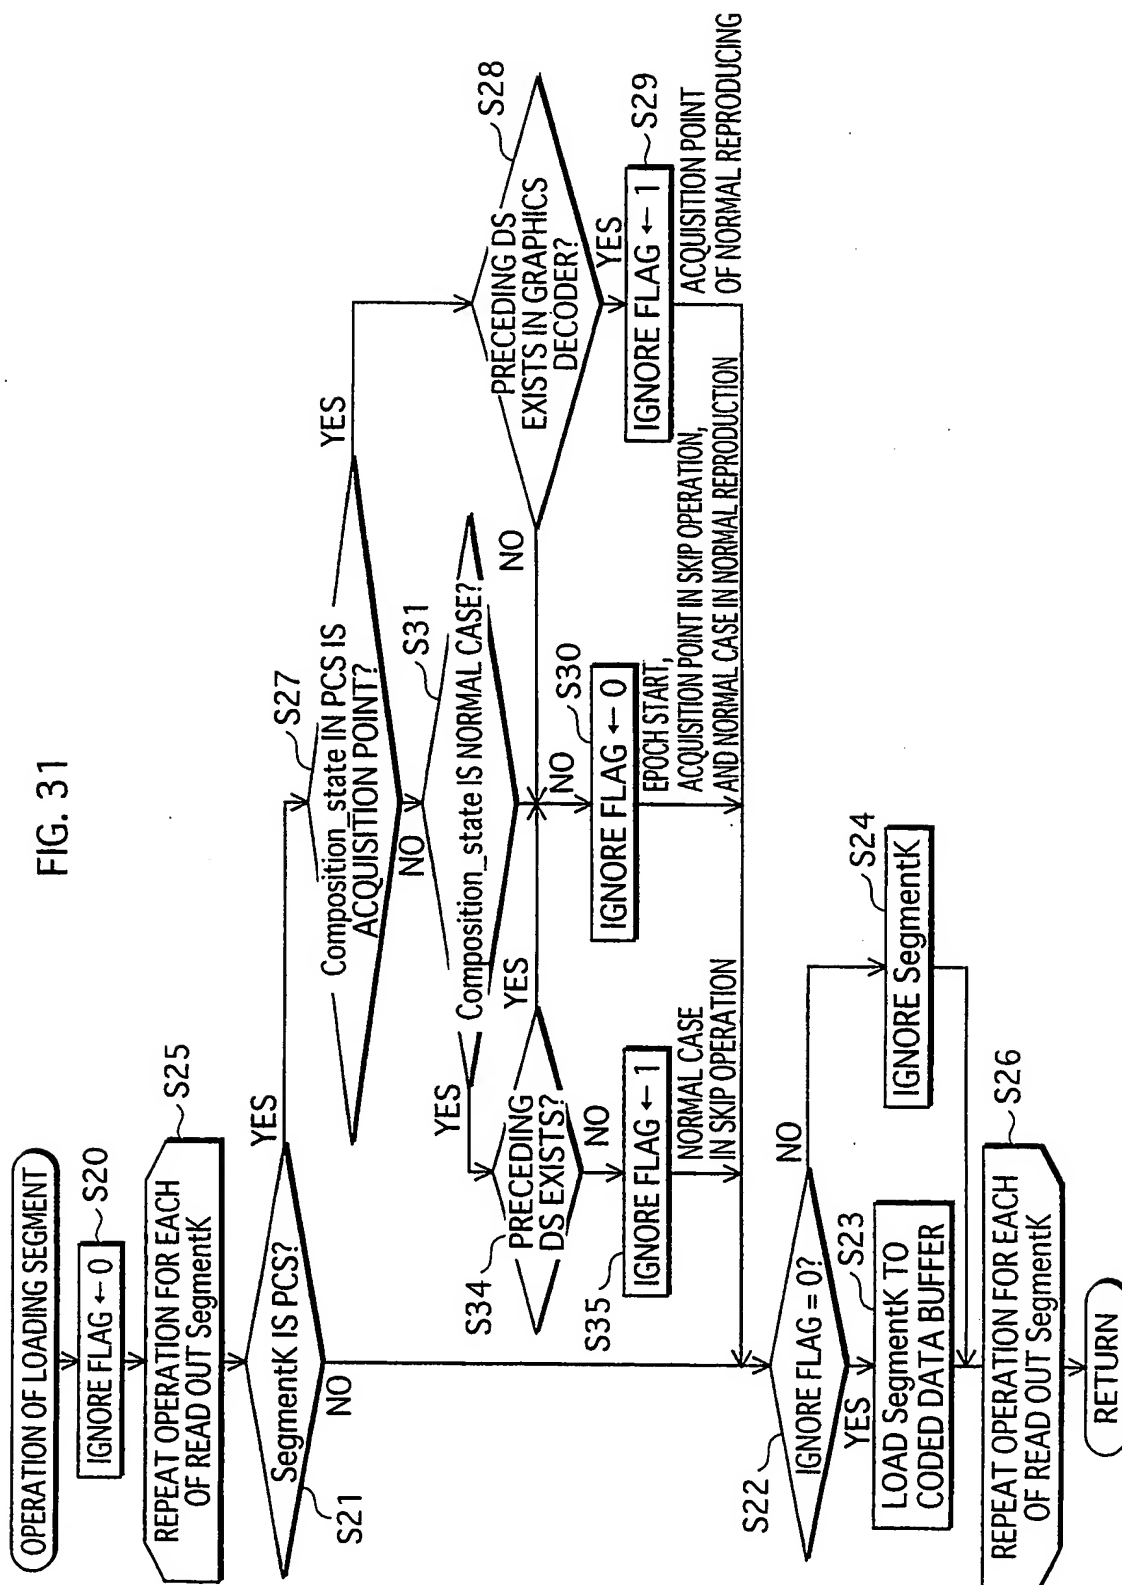


FIG. 32

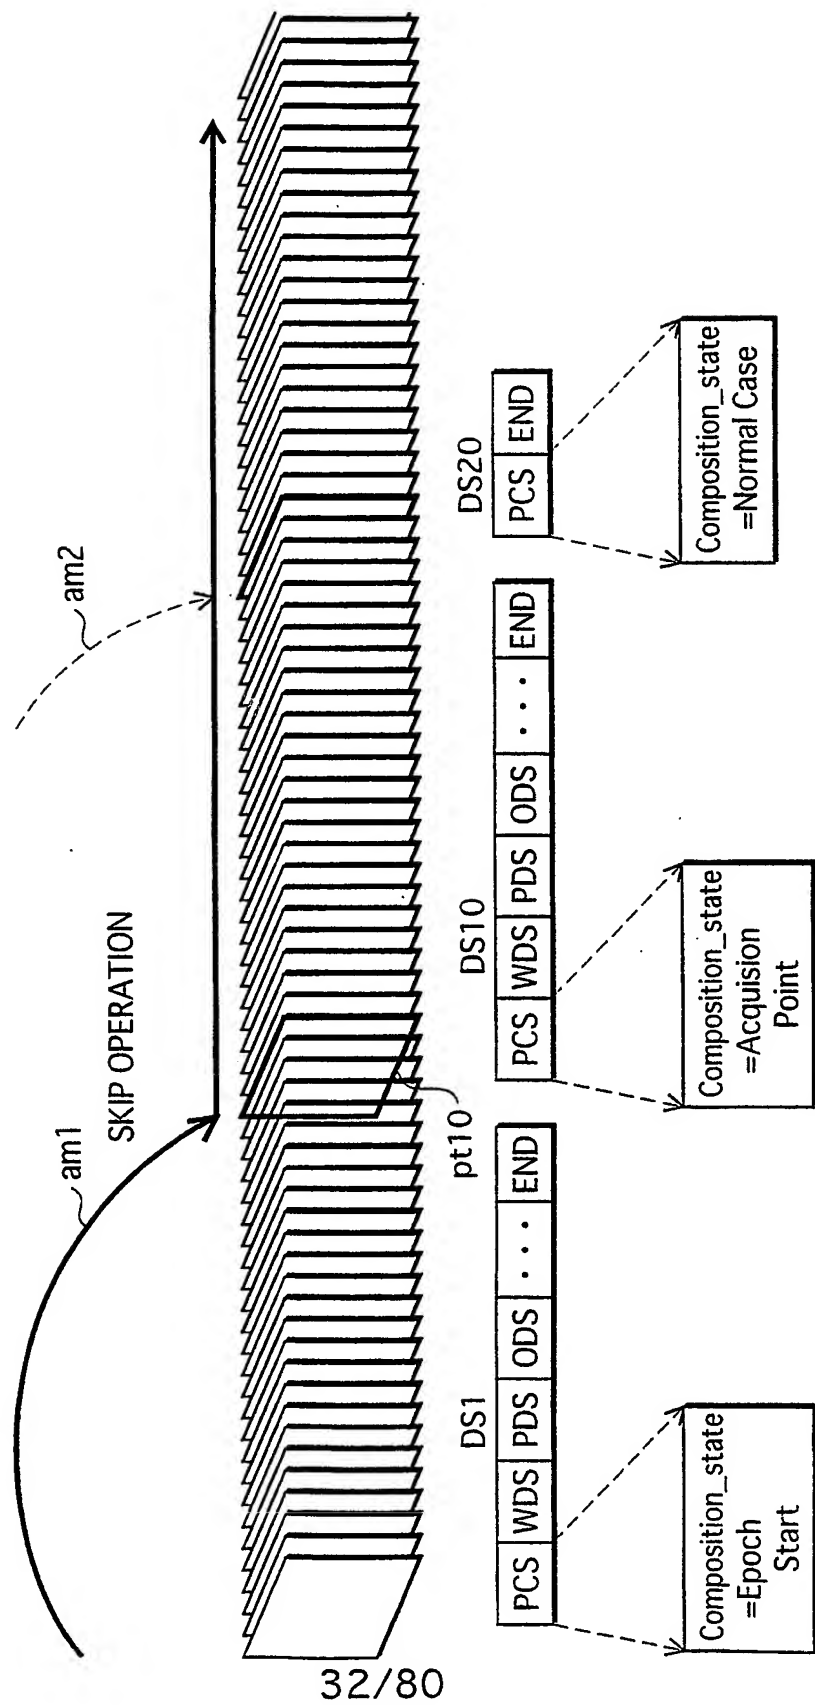


FIG. 33

CODED DATA BUFFER OF REPRODUCING APPARATUS

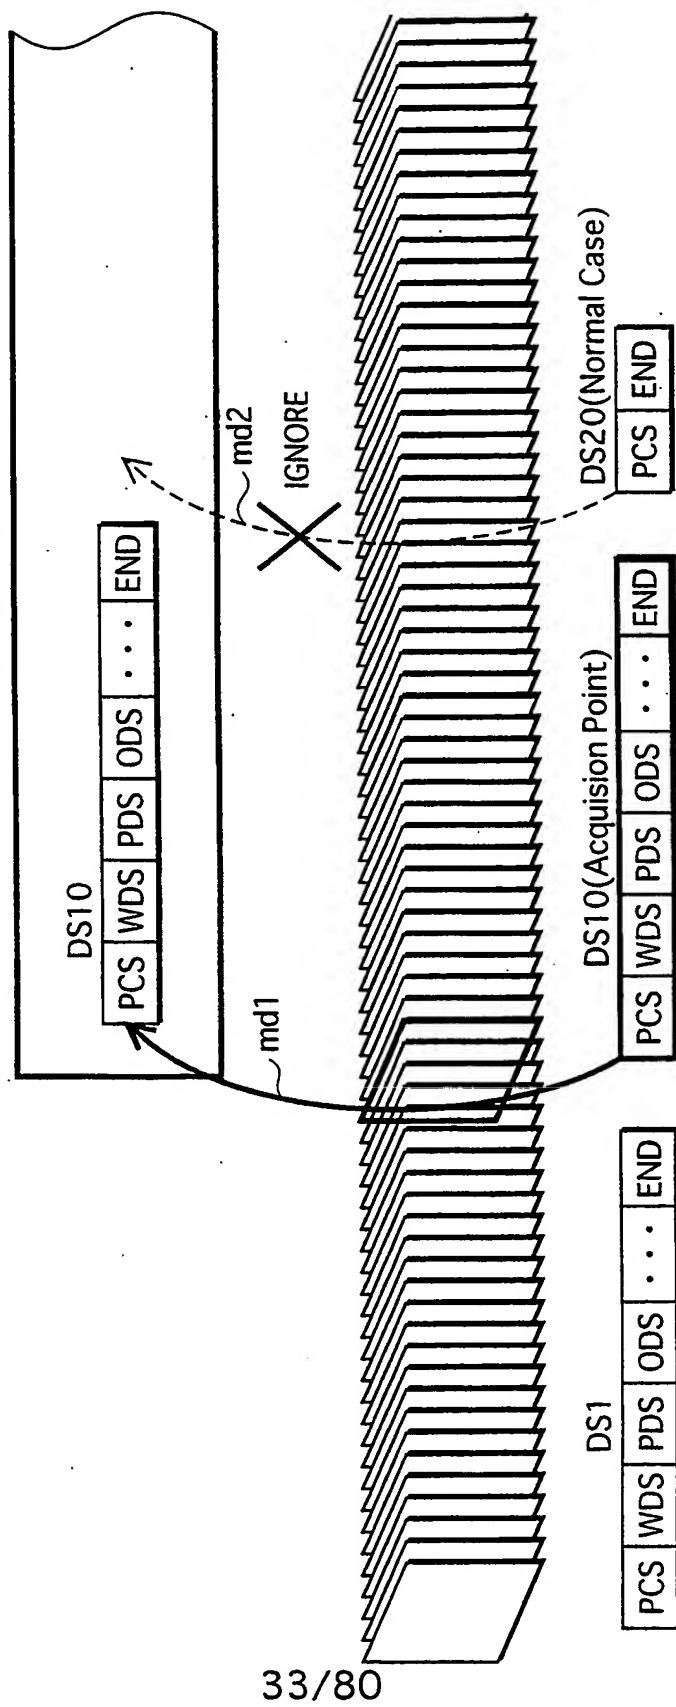


FIG. 34

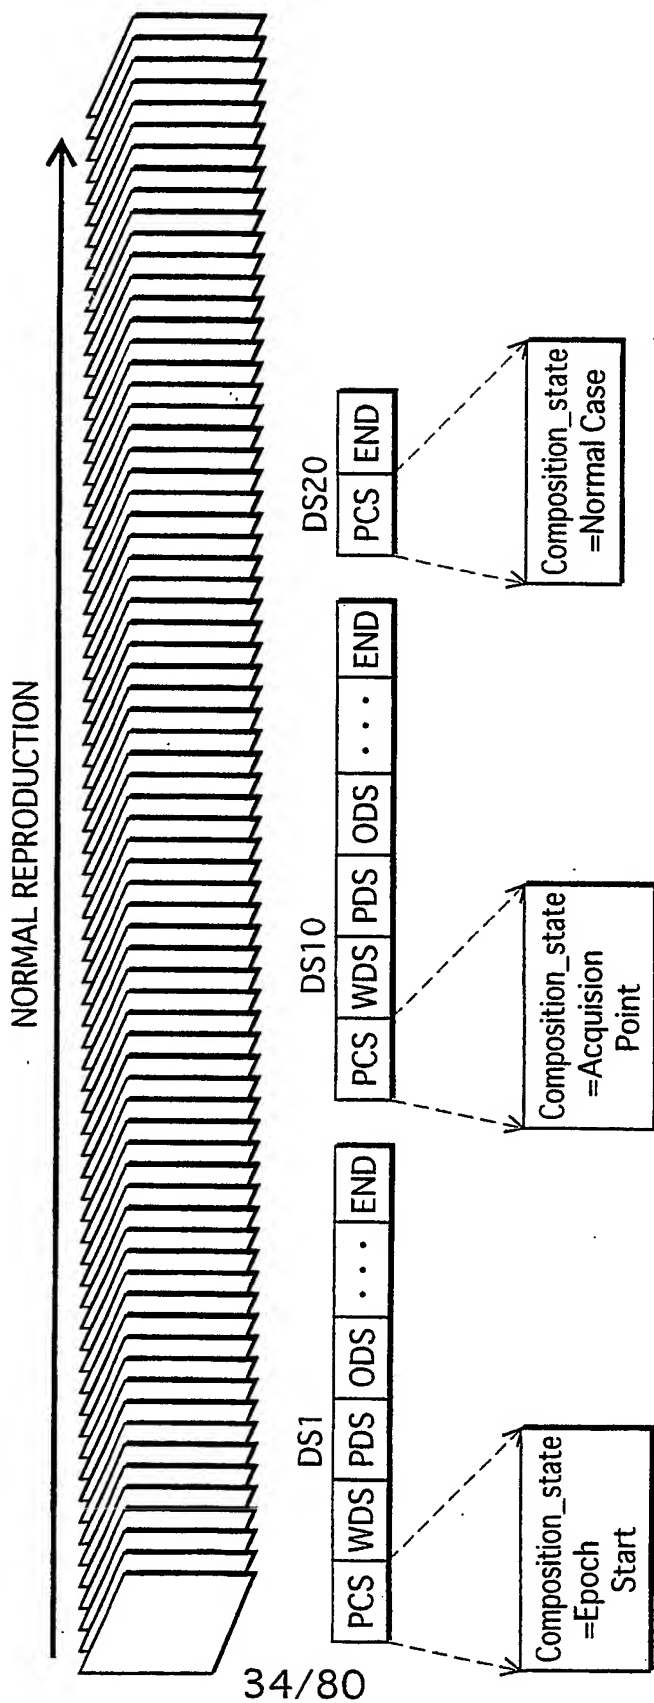


FIG. 35

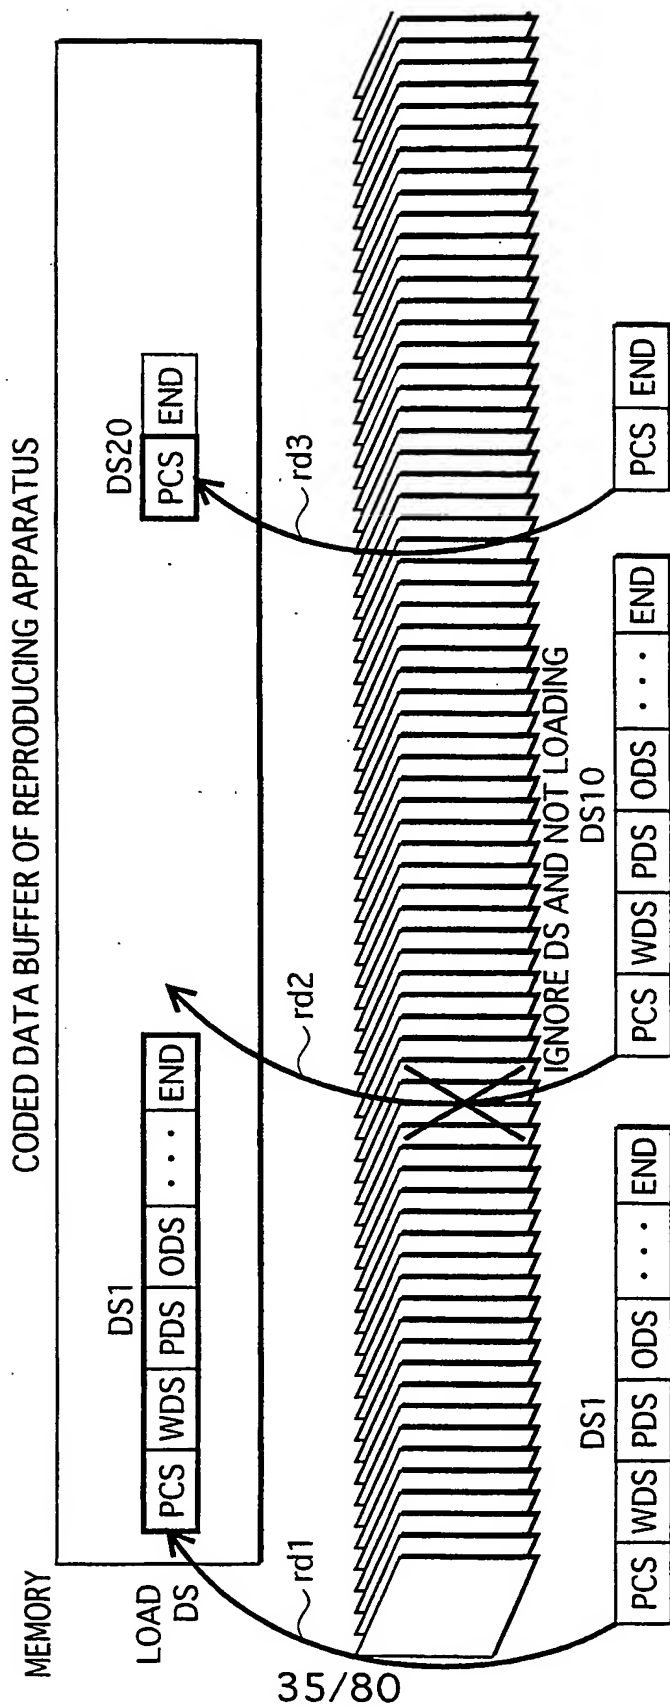


FIG. 36

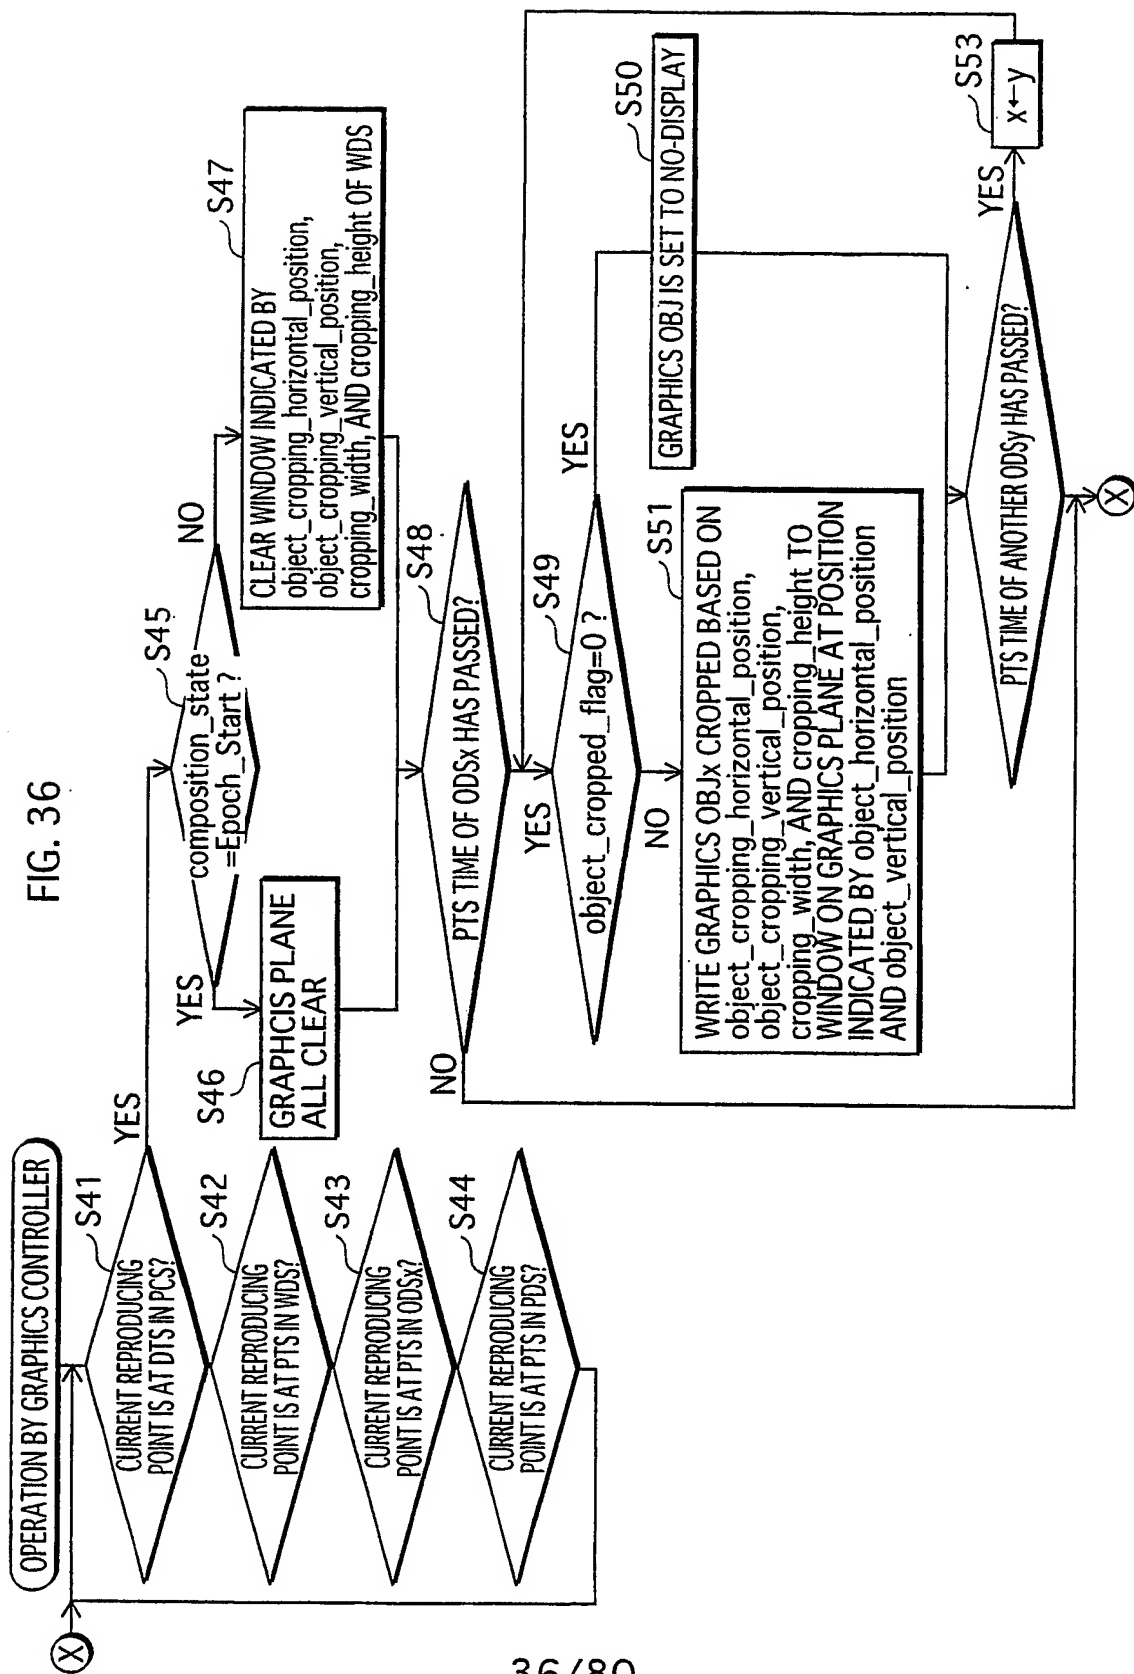


FIG. 37

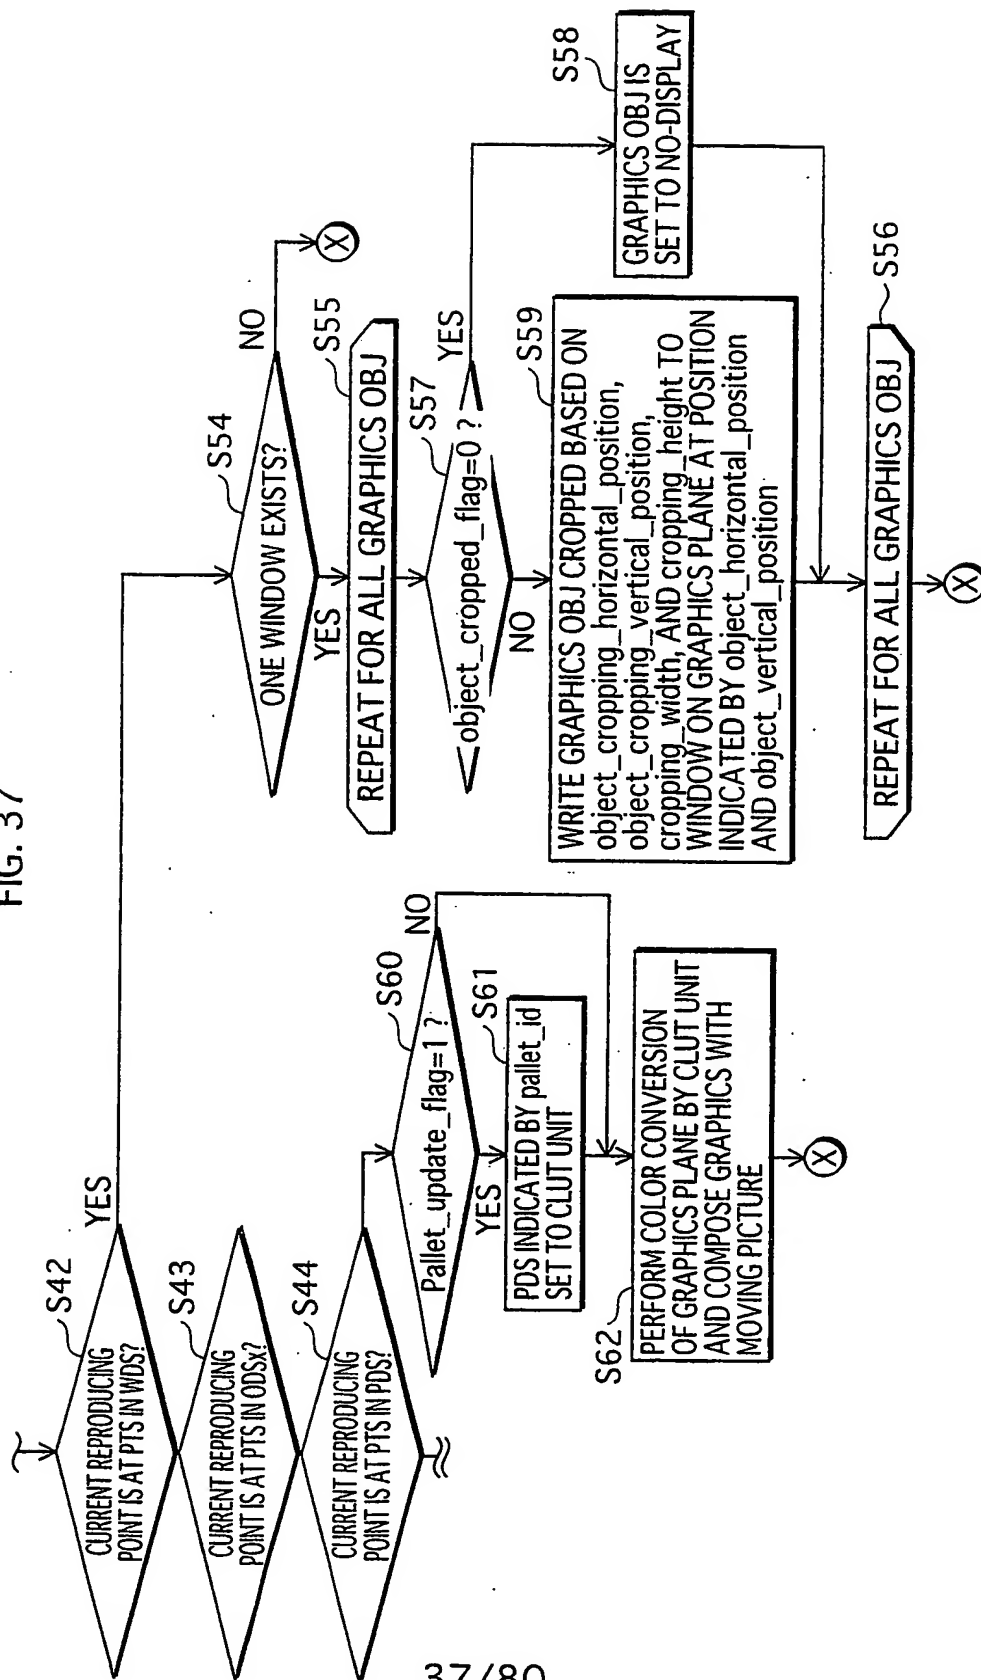


FIG. 38

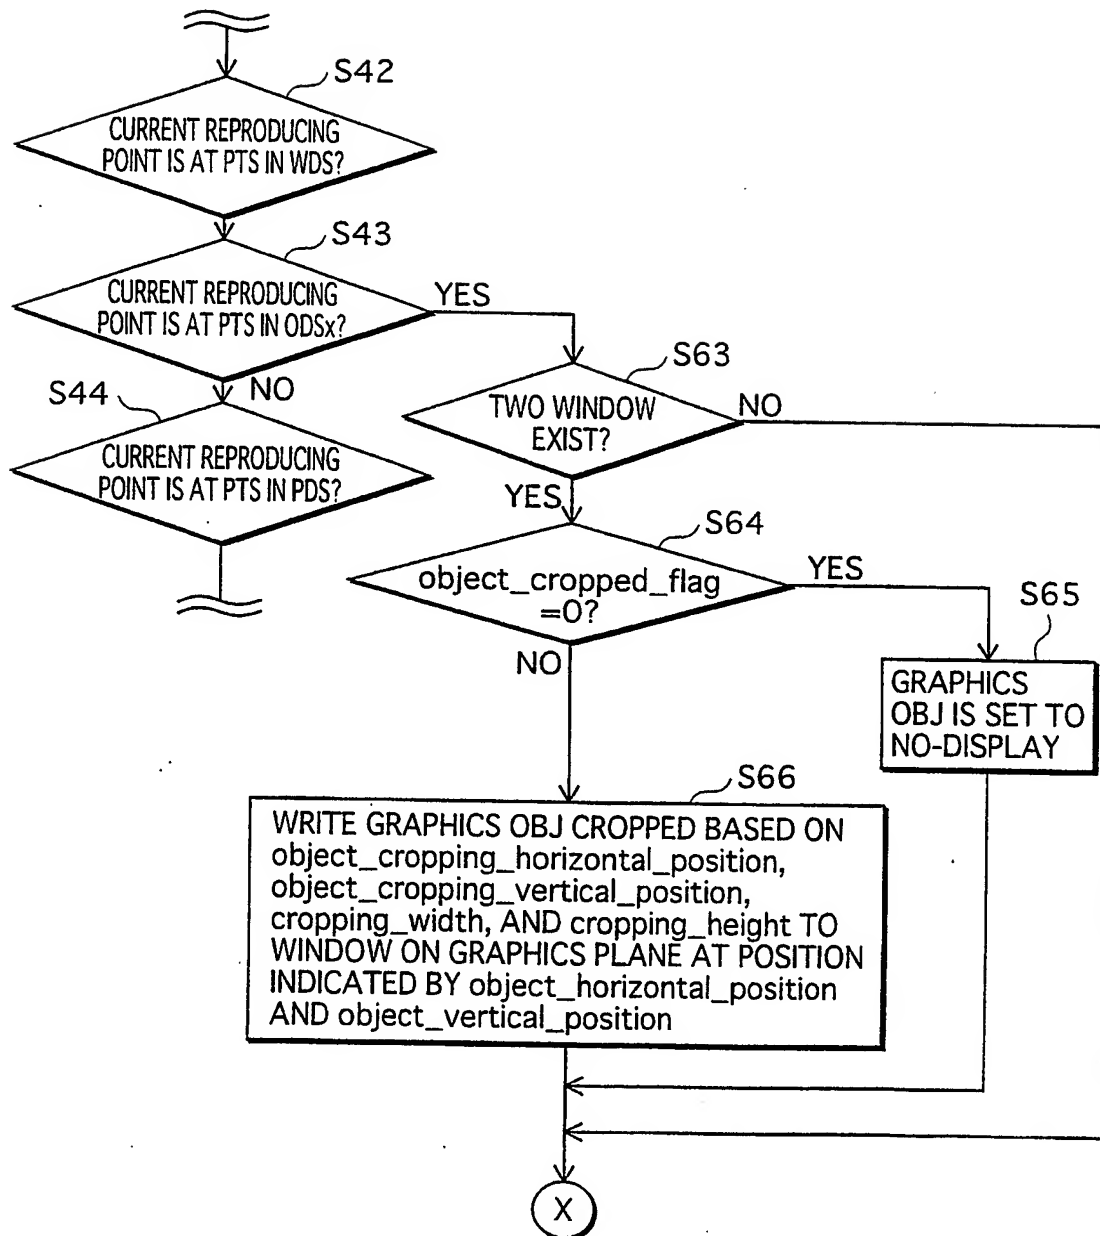


FIG. 39

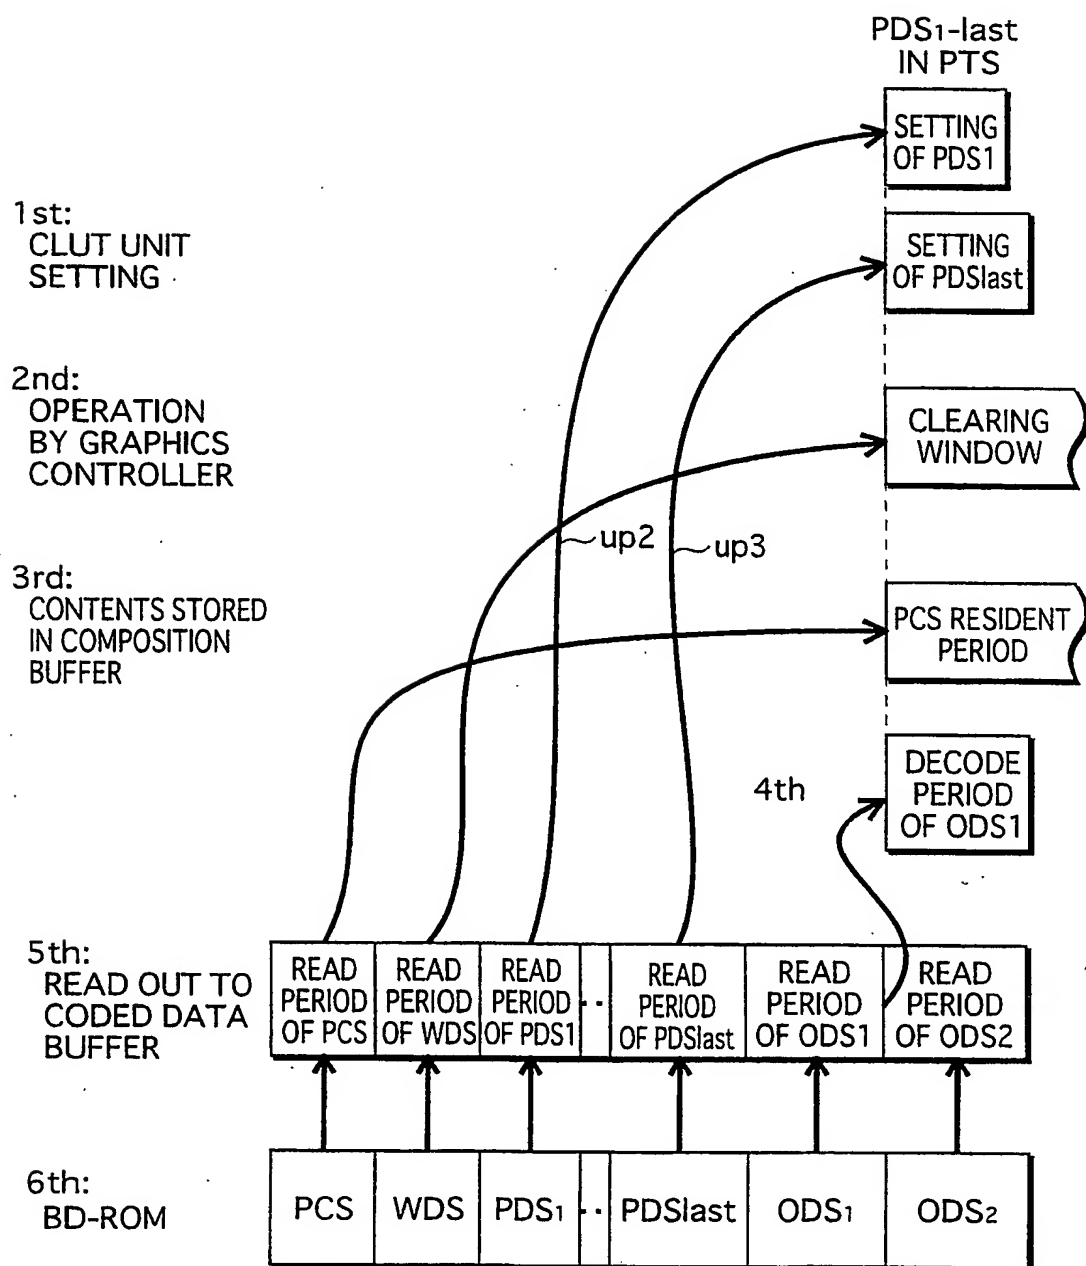
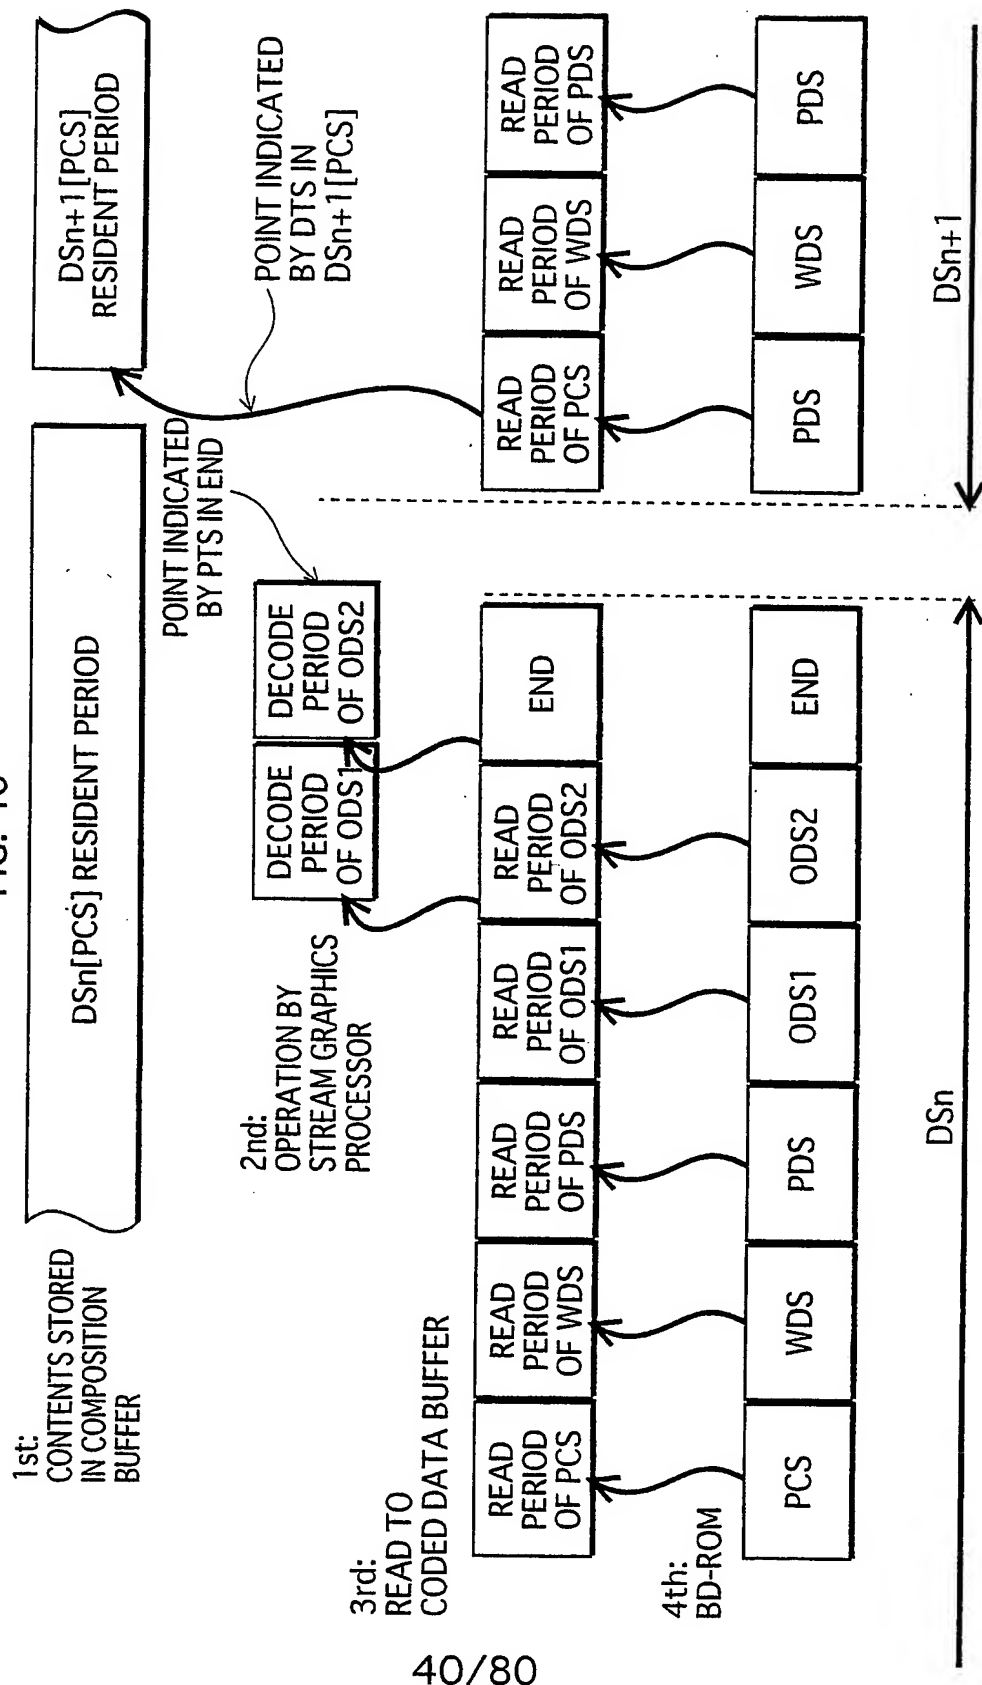


FIG. 40



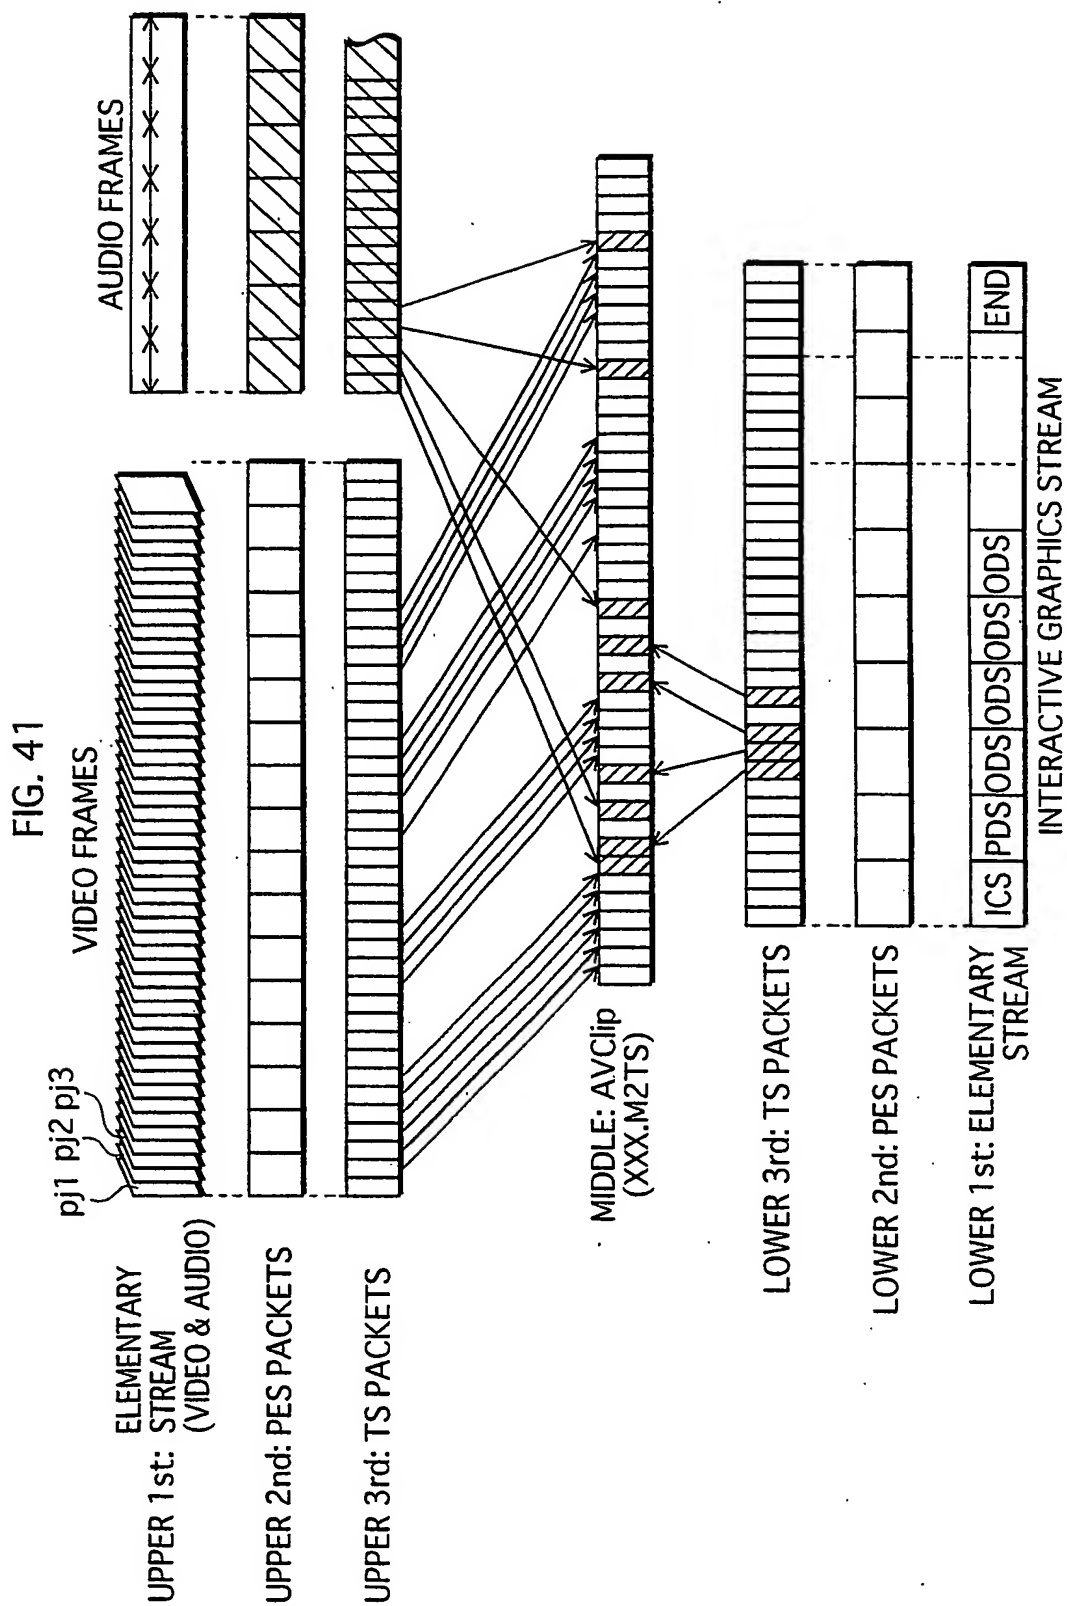


FIG.42A

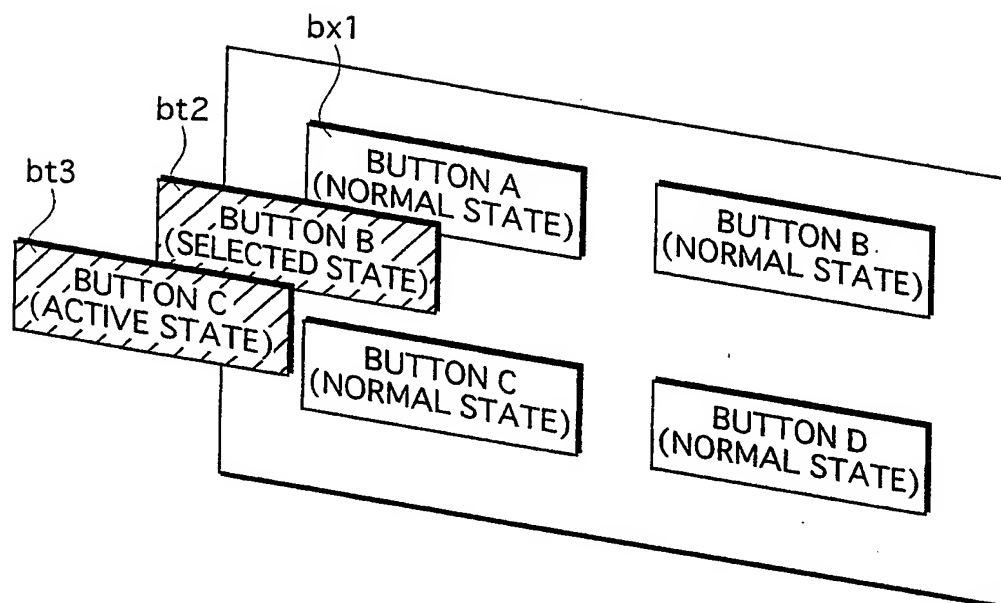


FIG.42B

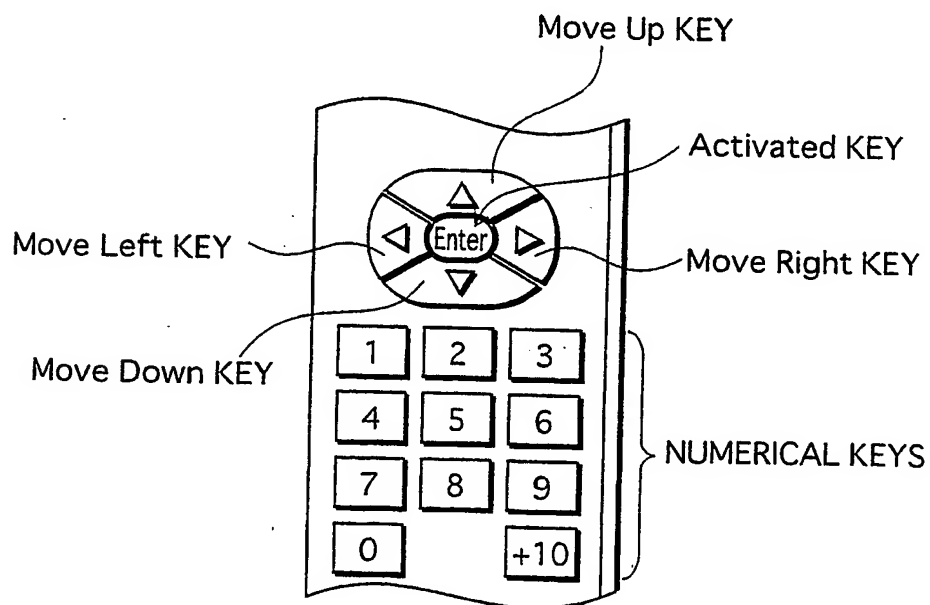
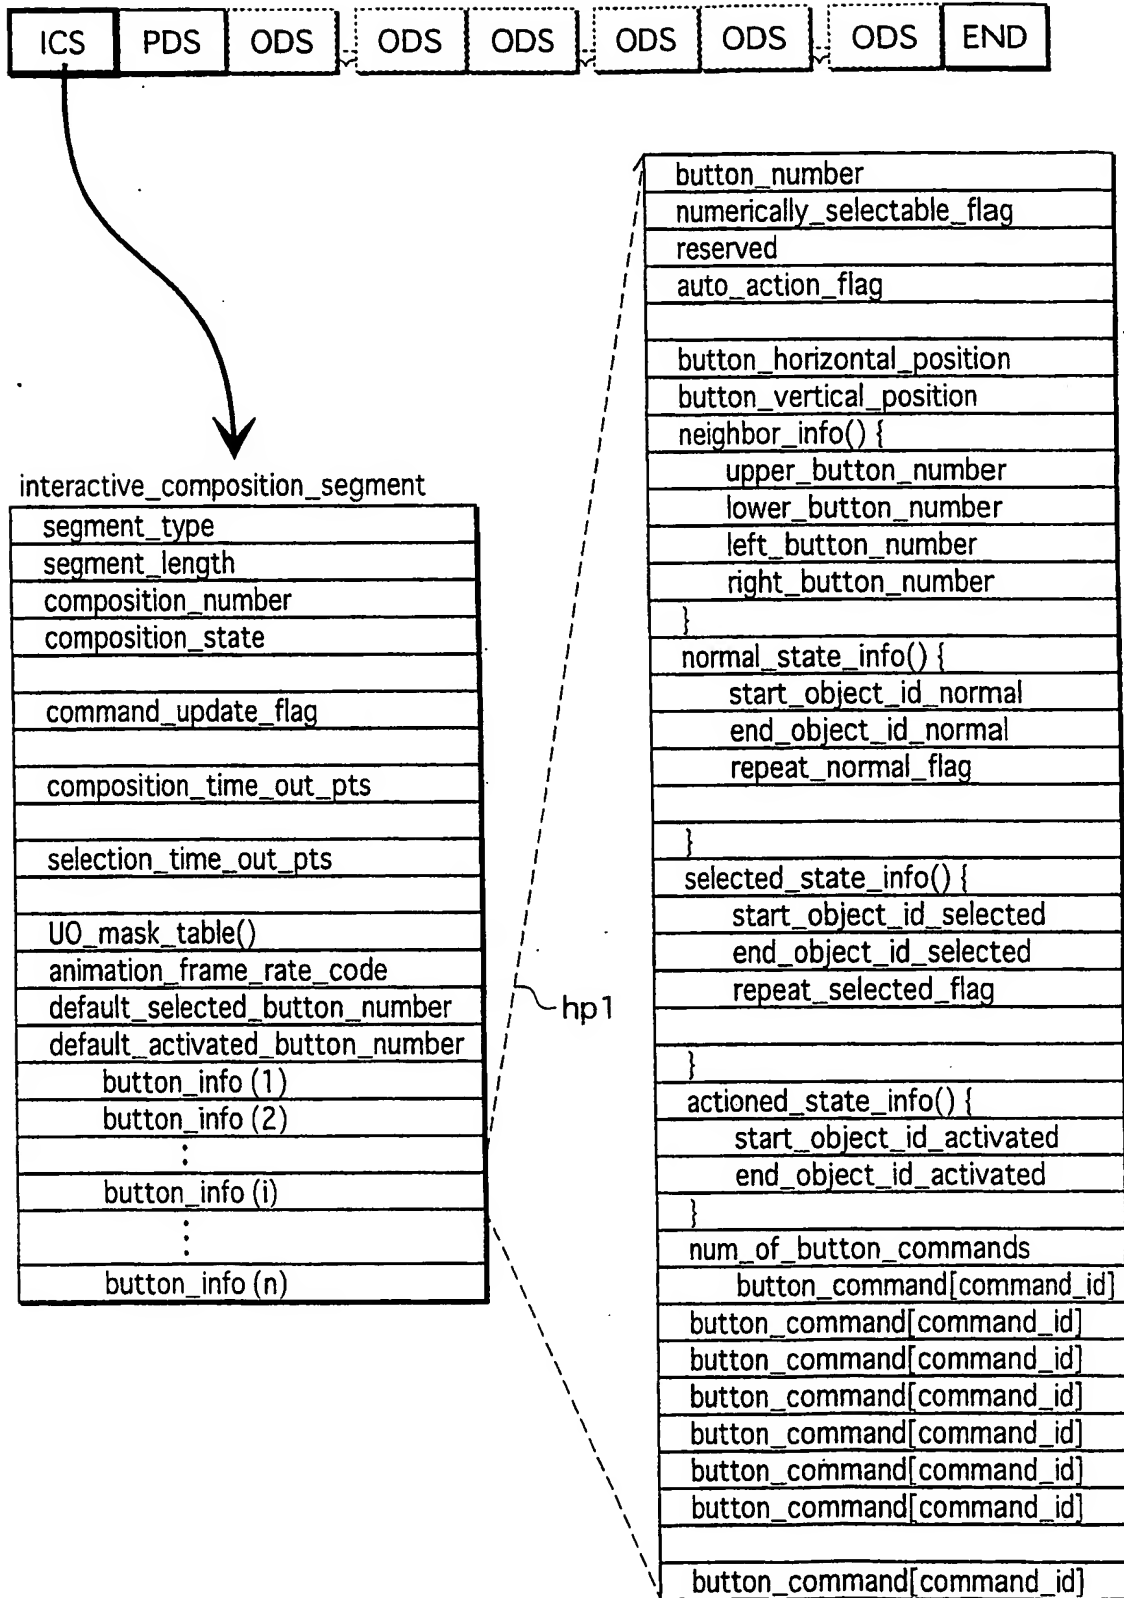
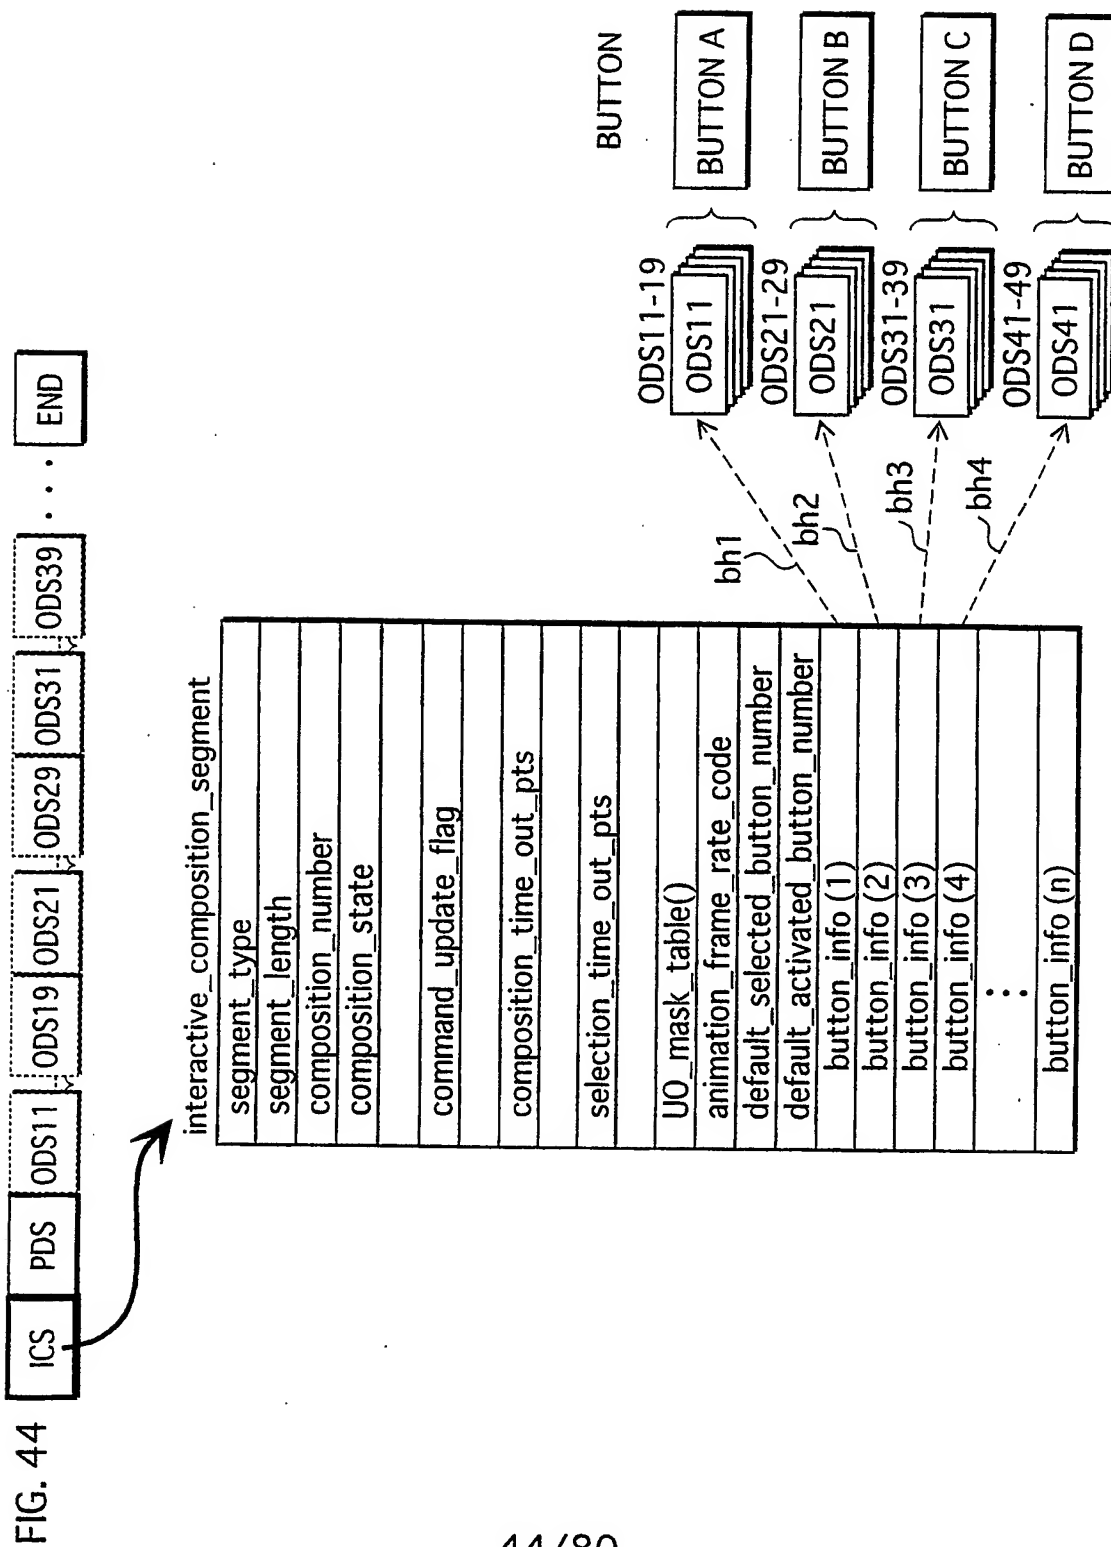


FIG.43





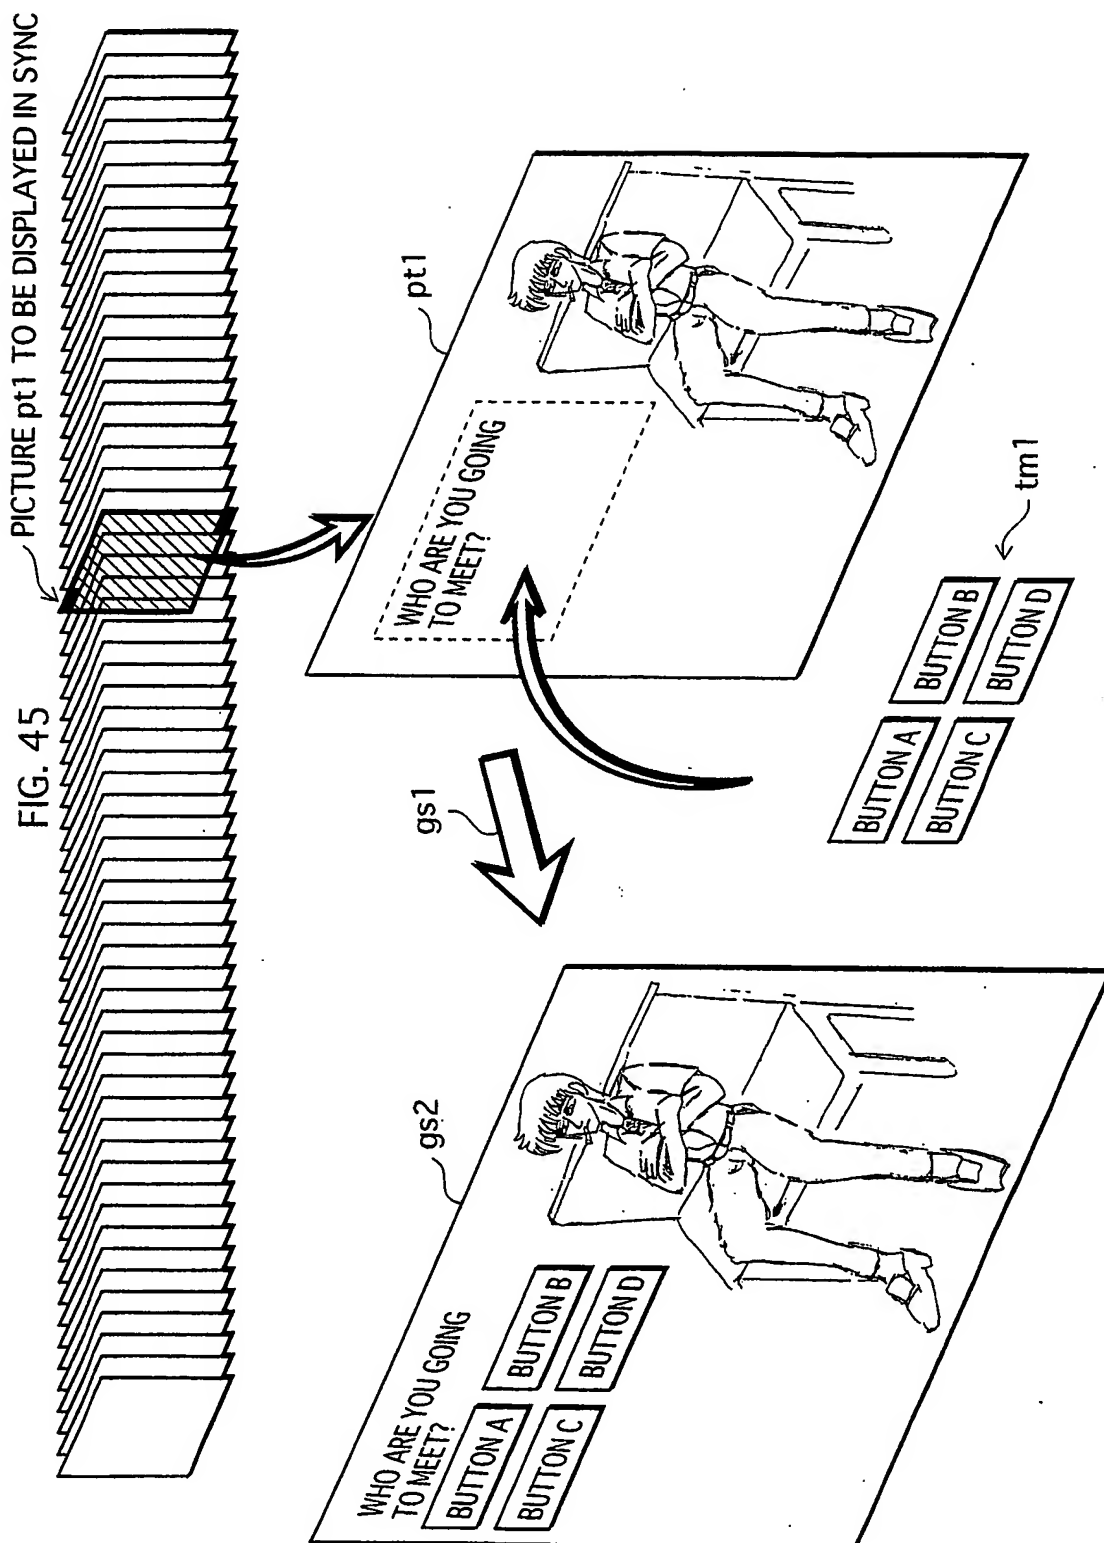
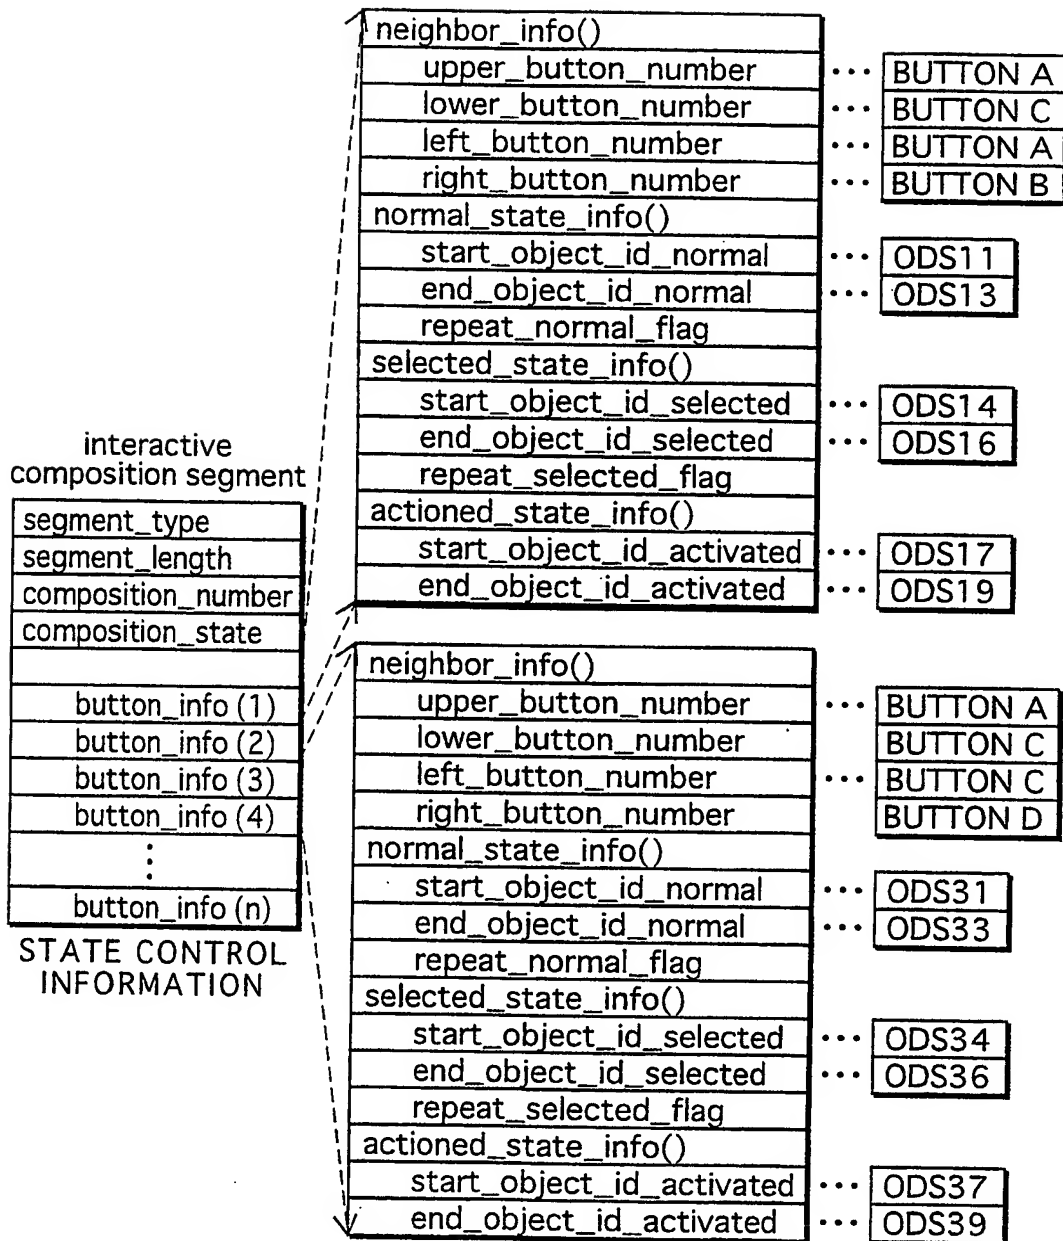


FIG.46



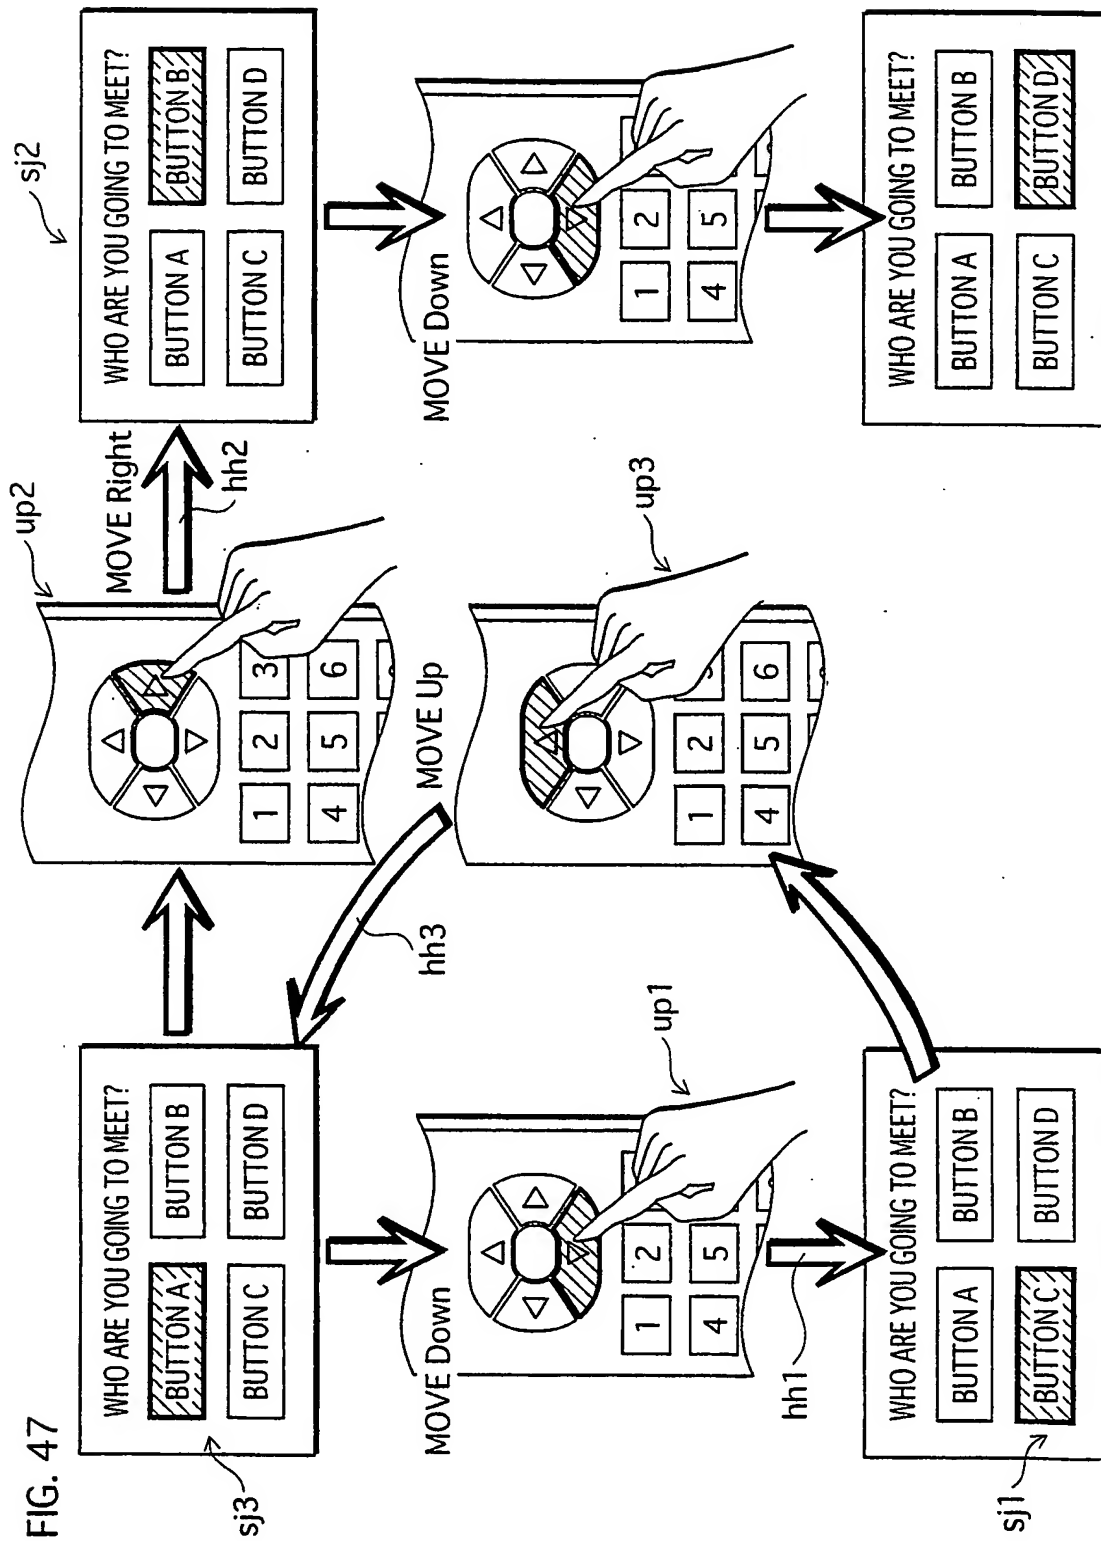


FIG.48

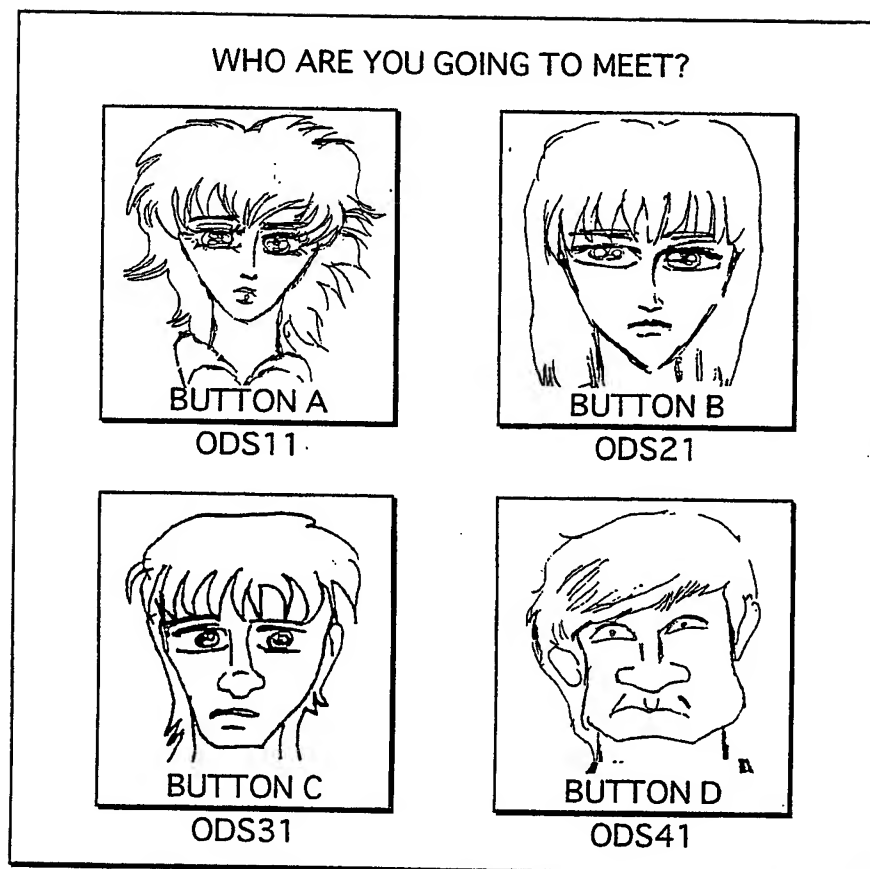


FIG.49

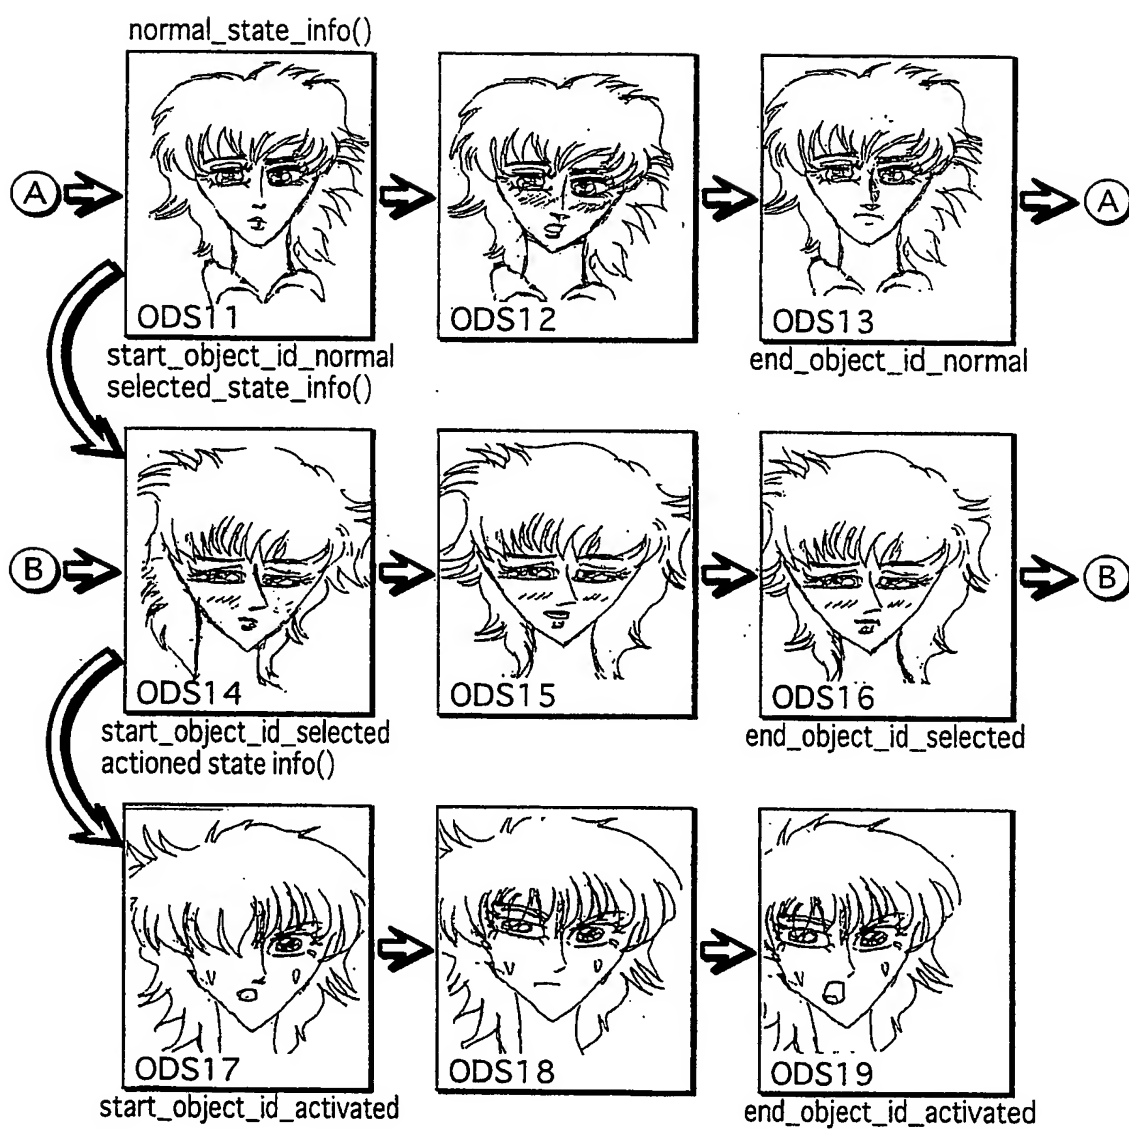


FIG. 50

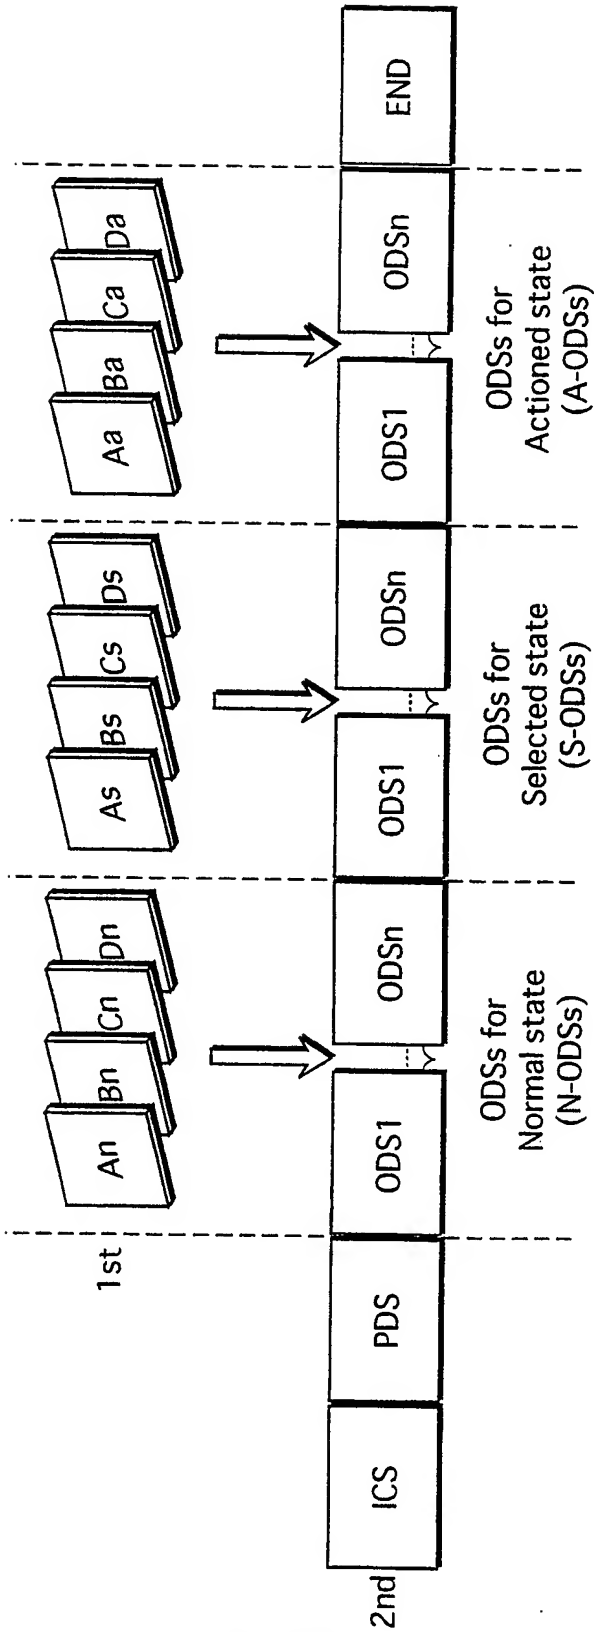


FIG. 51

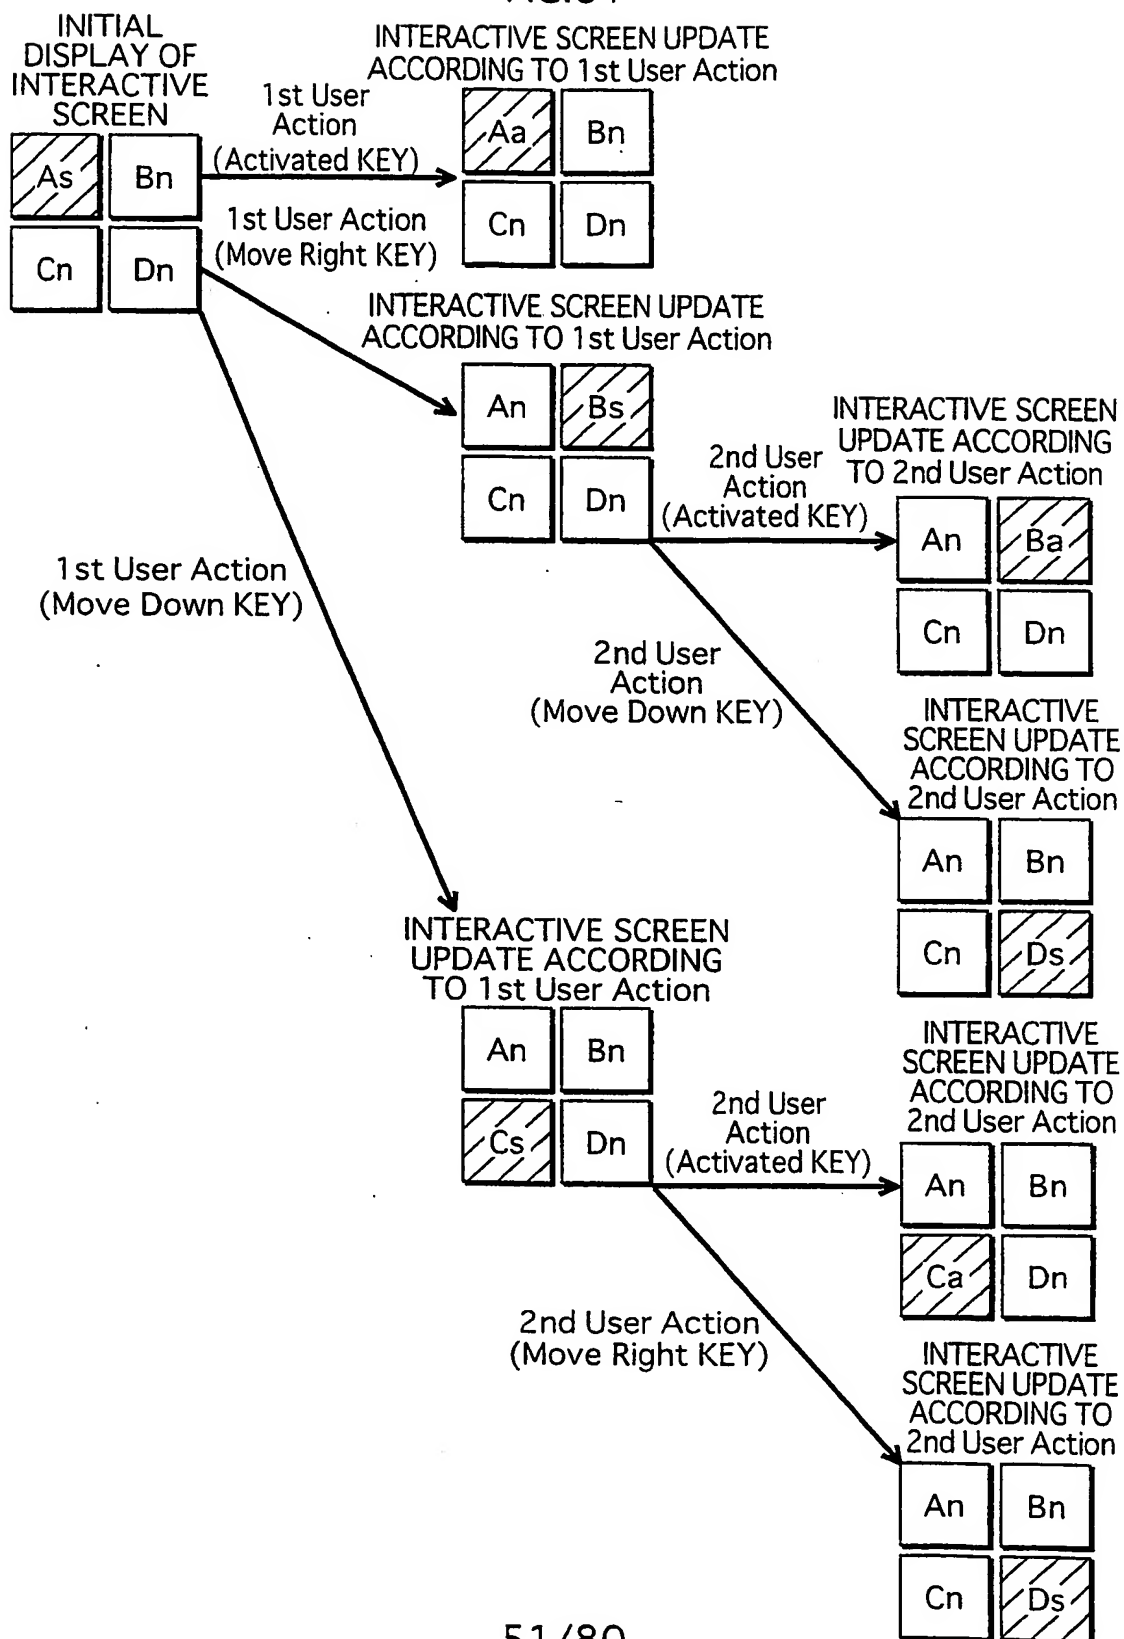


FIG. 52

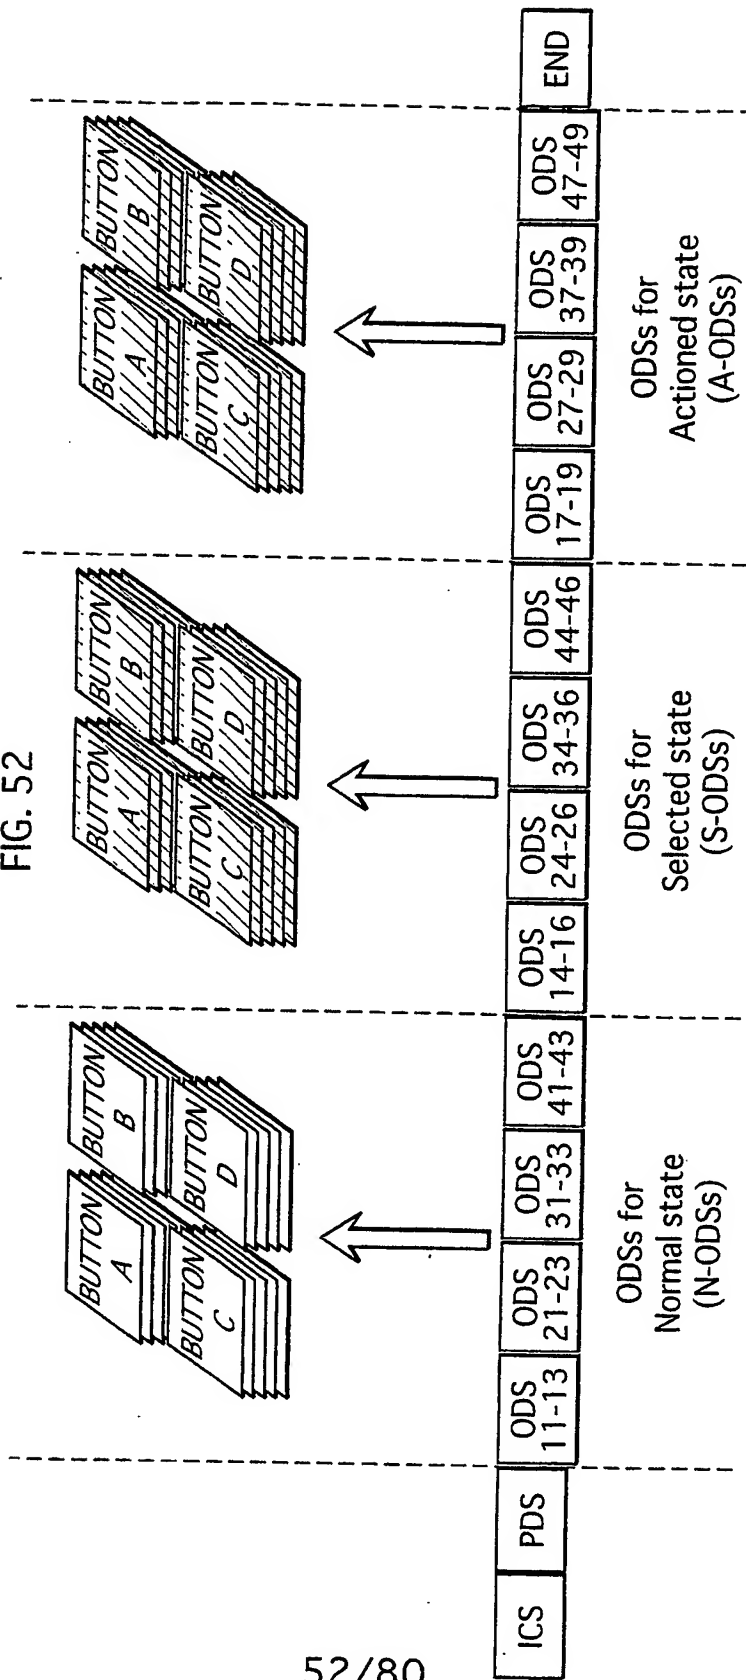


FIG. 53

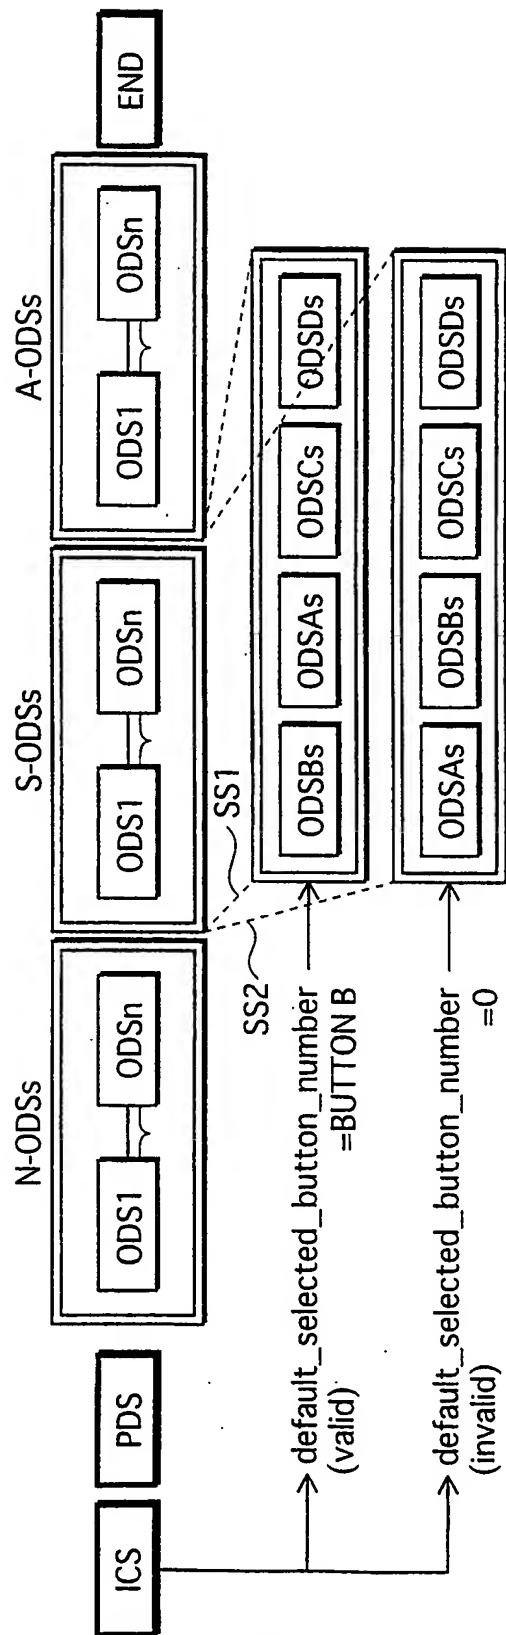


FIG. 54A

default_selected_button_number is indicated

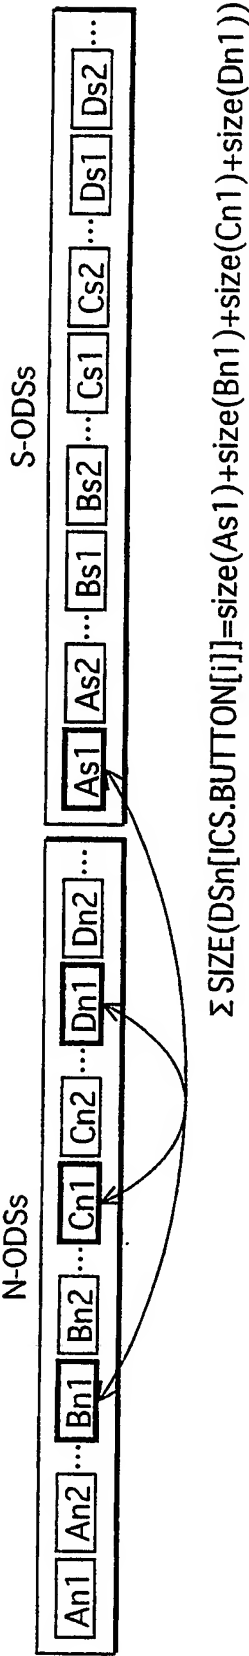


FIG. 54B

default_selected_button_number=0

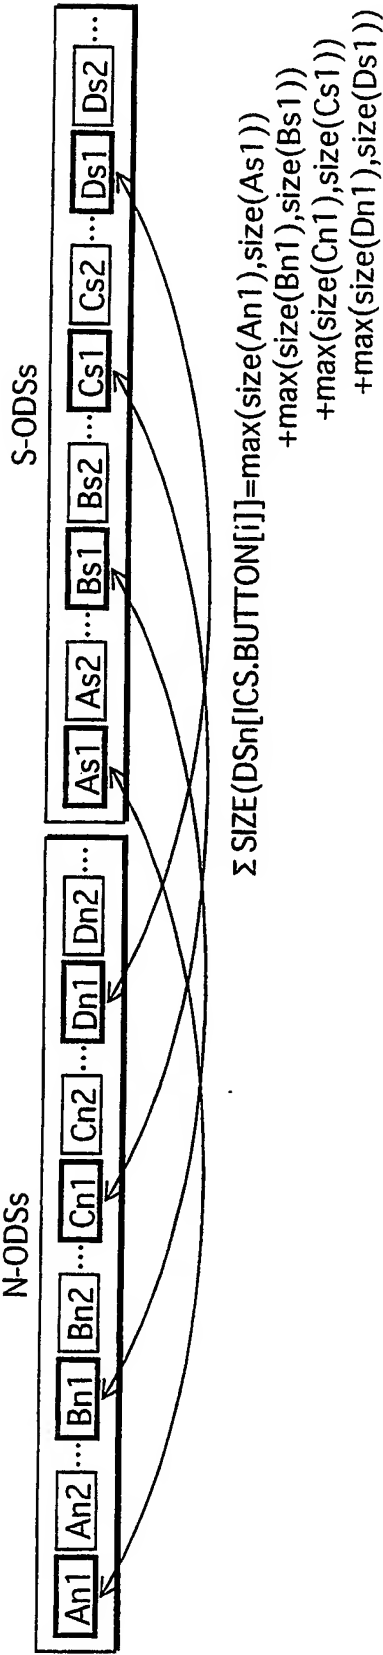


FIG. 55

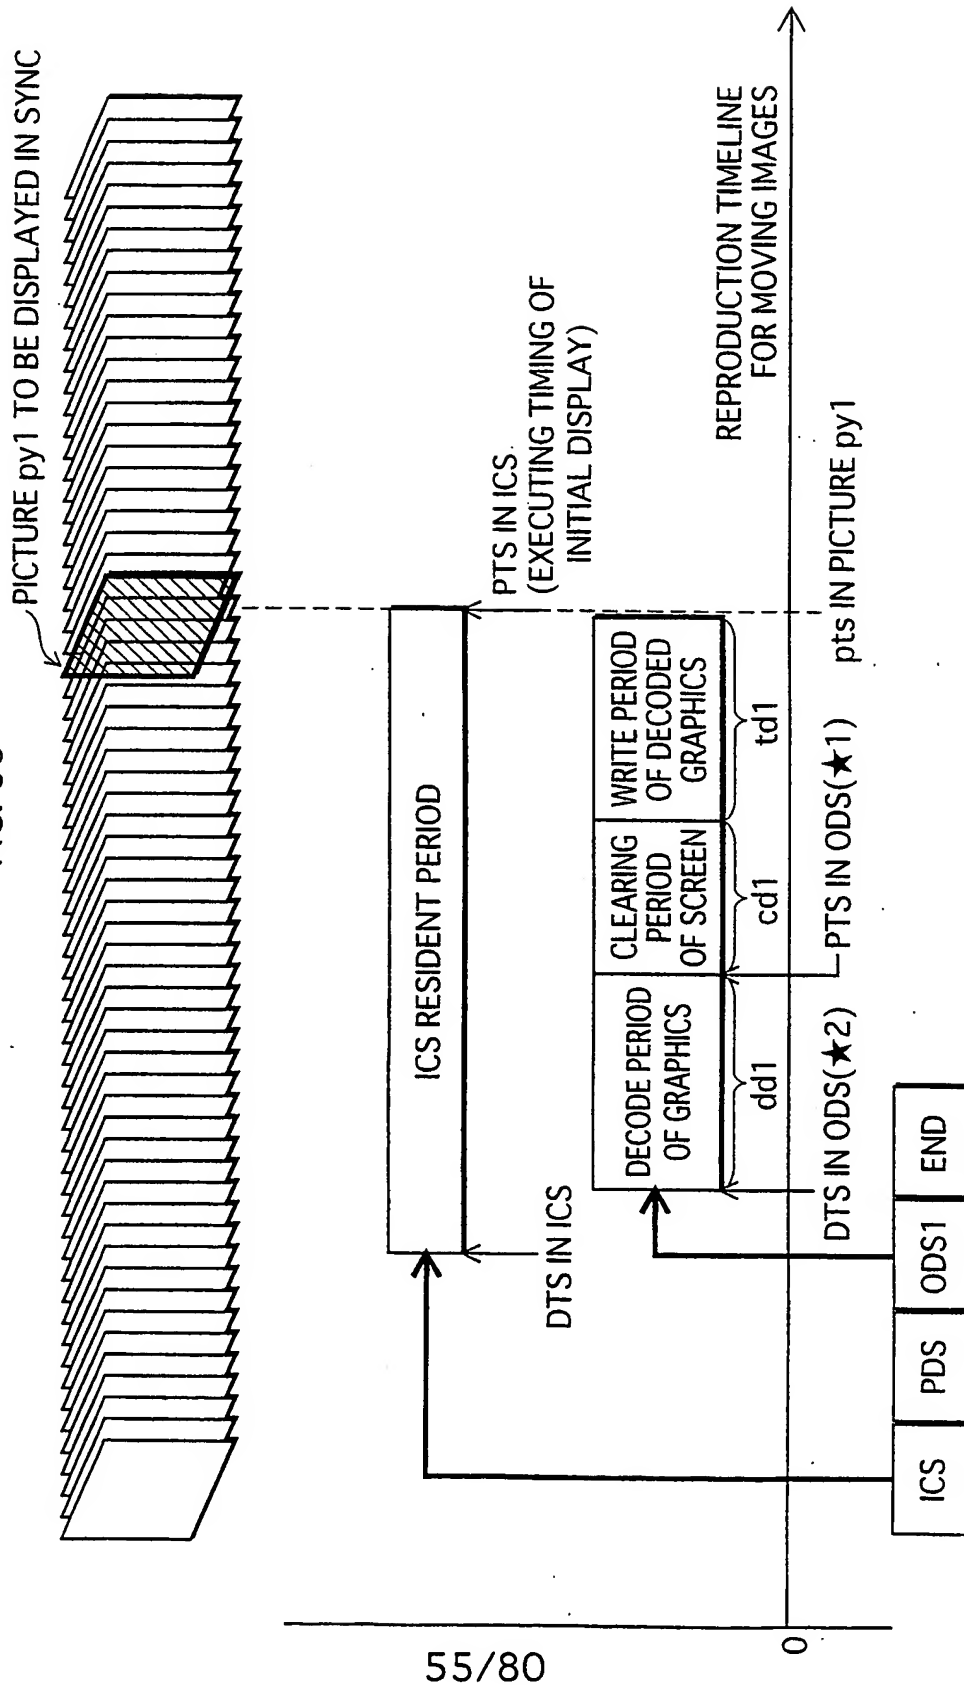


FIG. 56

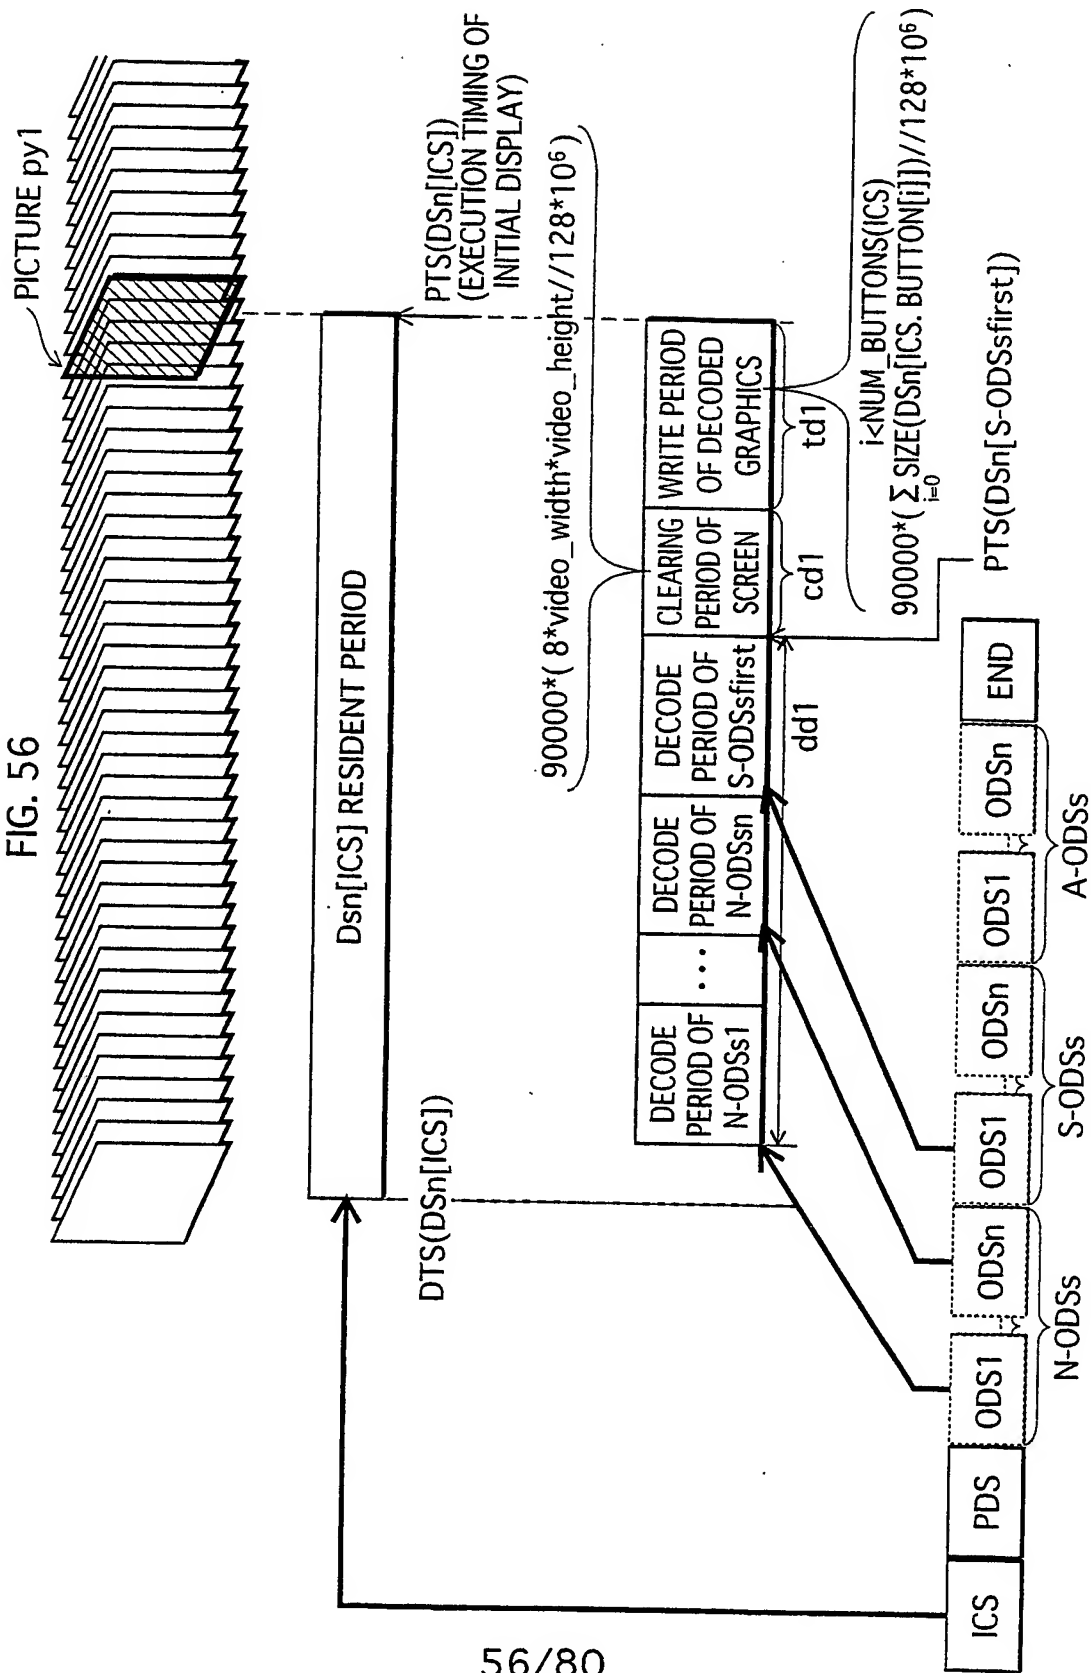


FIG. 57



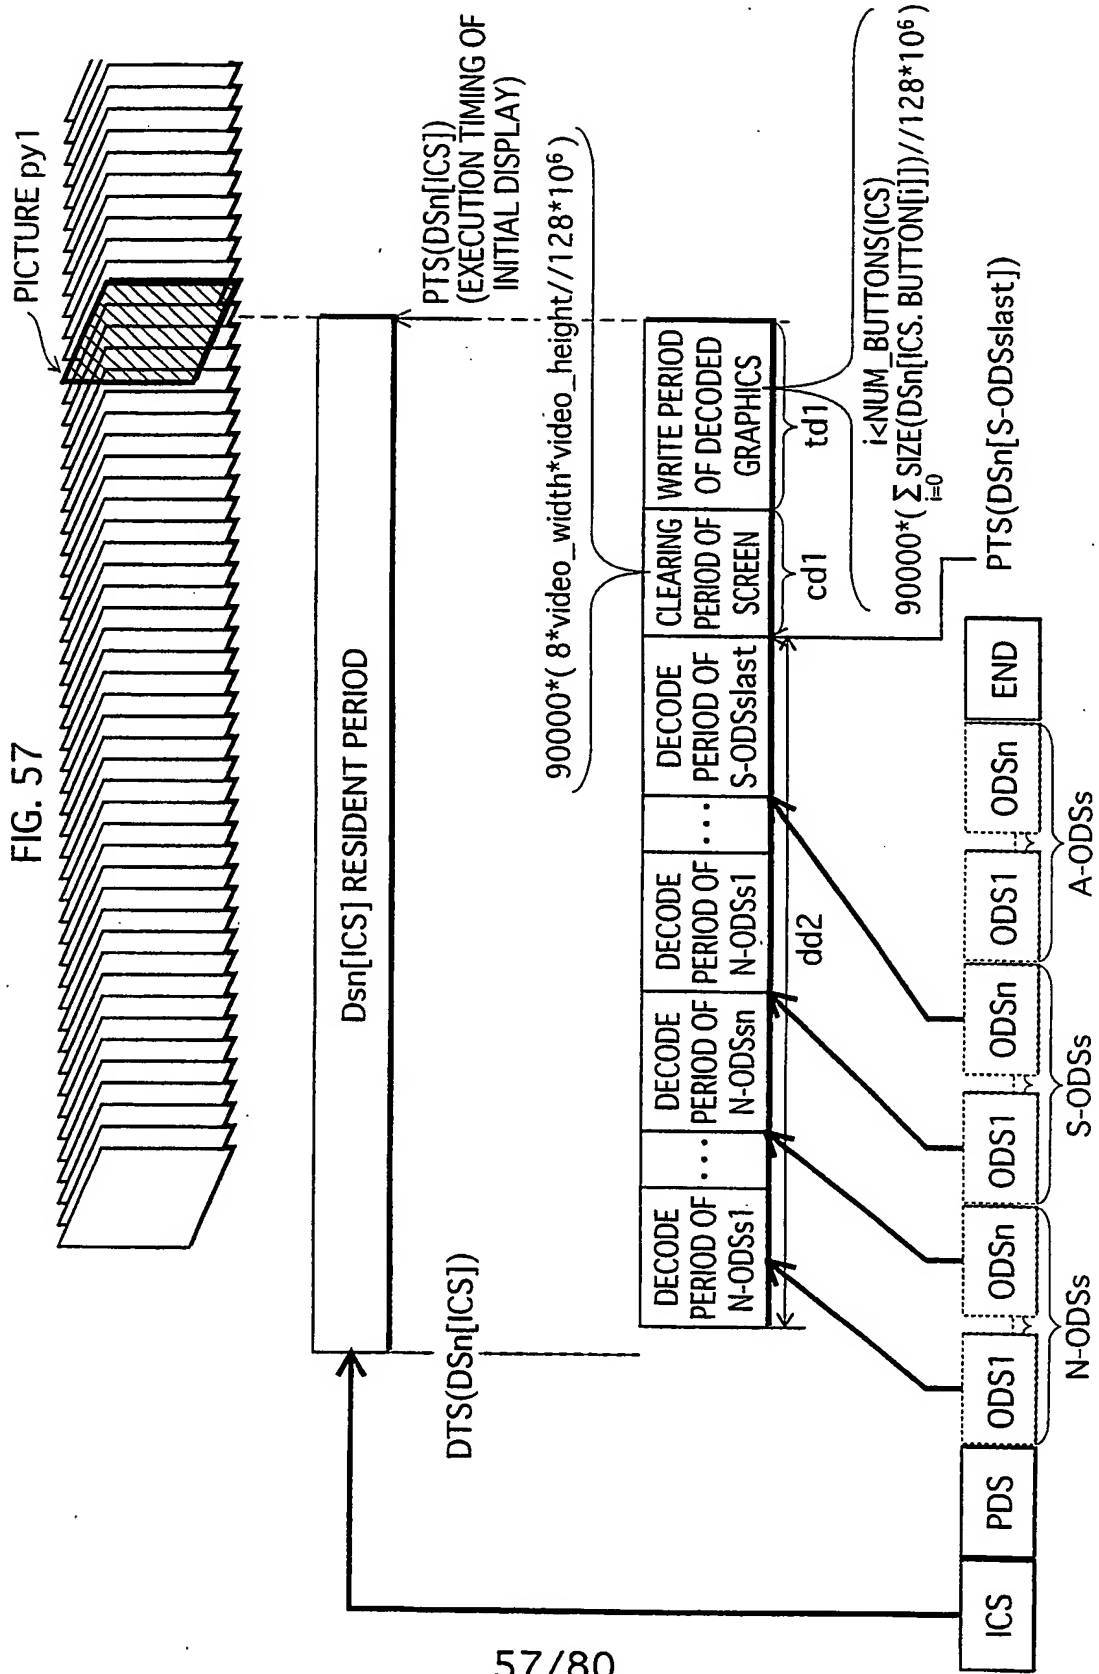


FIG. 58

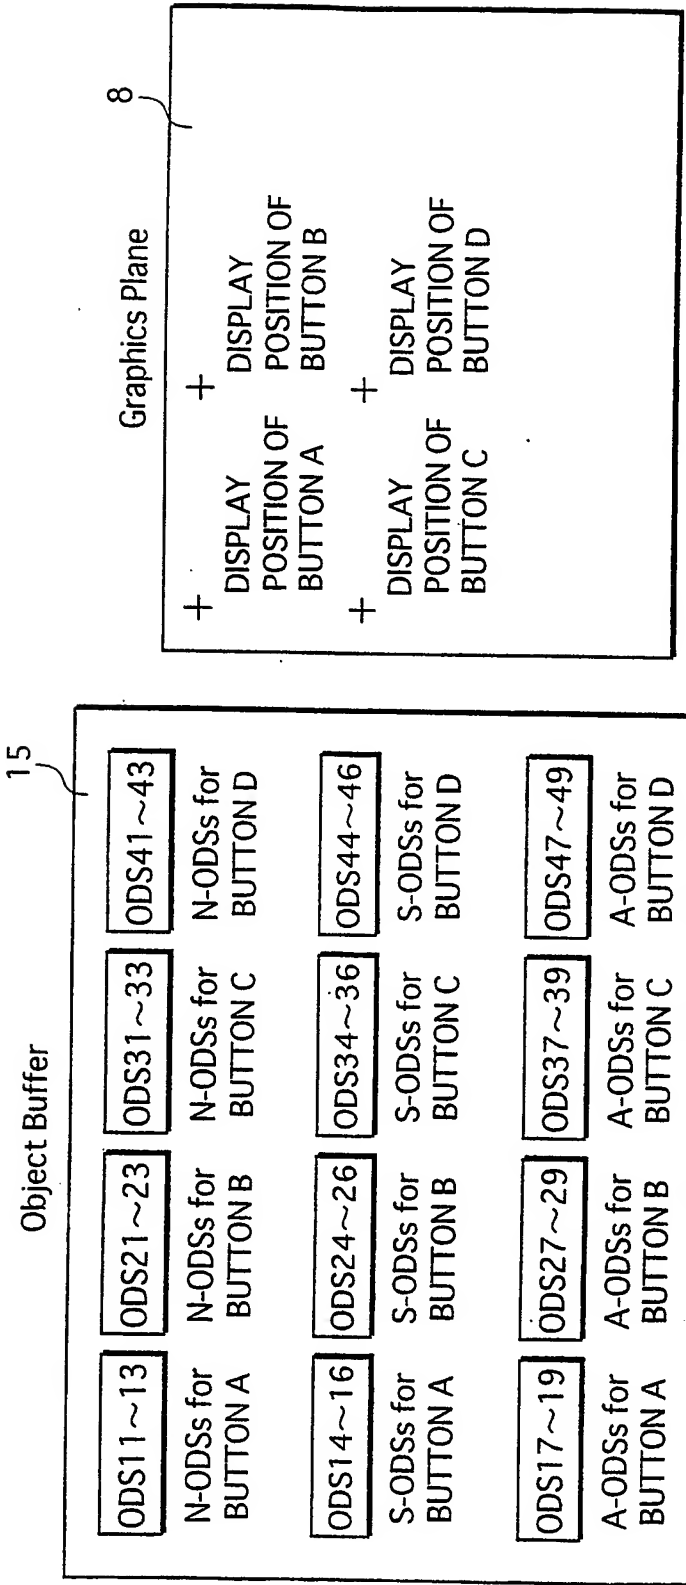

DISPLAY POSITION OF BUTTON=DISPLAY POSITION DEFINED
BY button_horizontal_position, button_vertical_position
OF BUTTON INFORMATION


FIG. 59
WRITE OPERATION OF Graphics Controller AT INITIAL DISPLAY

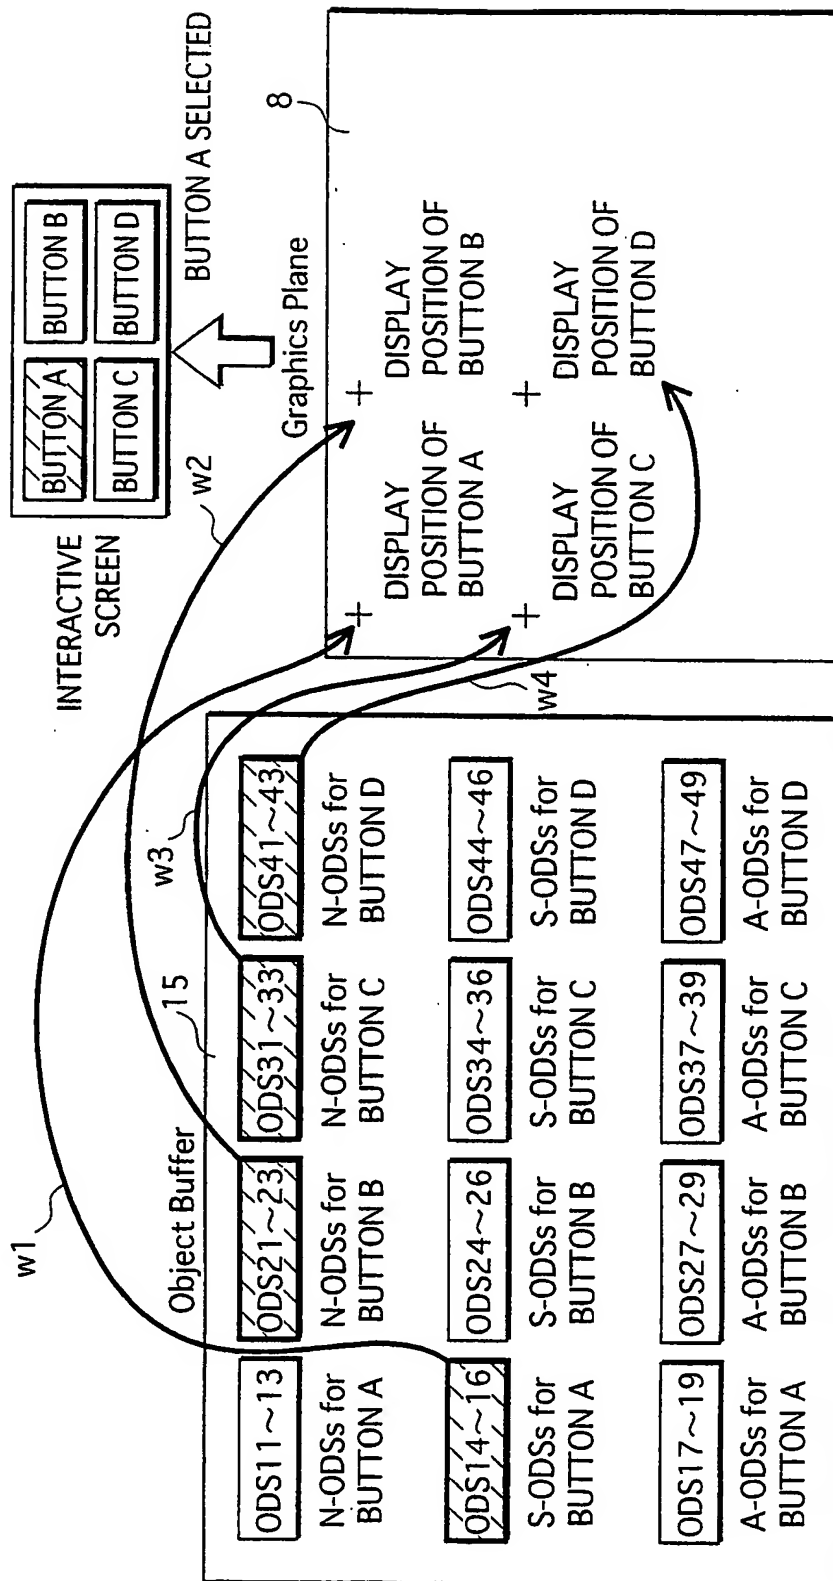

DISPLAY POSITION OF BUTTON=DISPLAY POSITION DEFINED
BY button_horizontal_position, button_vertical_position
OF BUTTON INFORMATION

FIG. 61


WRITE OPERATION OF Graphics Controller
AT INTERACTIVE-SCREEN UPDATE ACCORDING TO
1st User Action(Move Down)

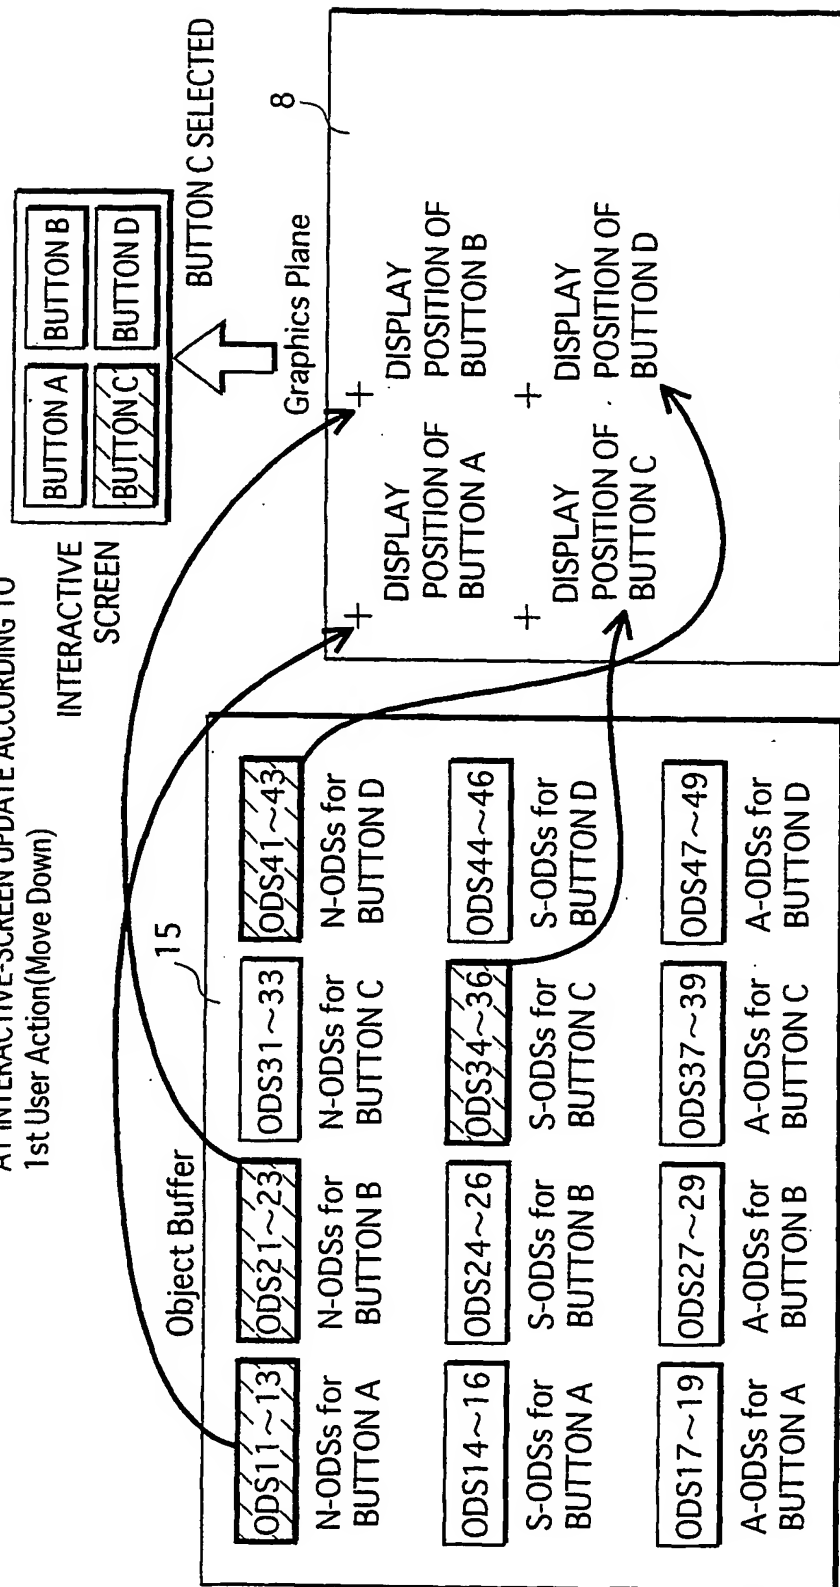


DISPLAY POSITION OF BUTTON=DISPLAY POSITION DEFINED
BY button_horizontal position, button_vertical_position
OF BUTTON INFORMATION

FIG. 62

WRITE OPERATION OF Graphics Controller
AT INTERACTIVE-SCREEN UPDATE ACCORDING TO
1st User Action(Activated)

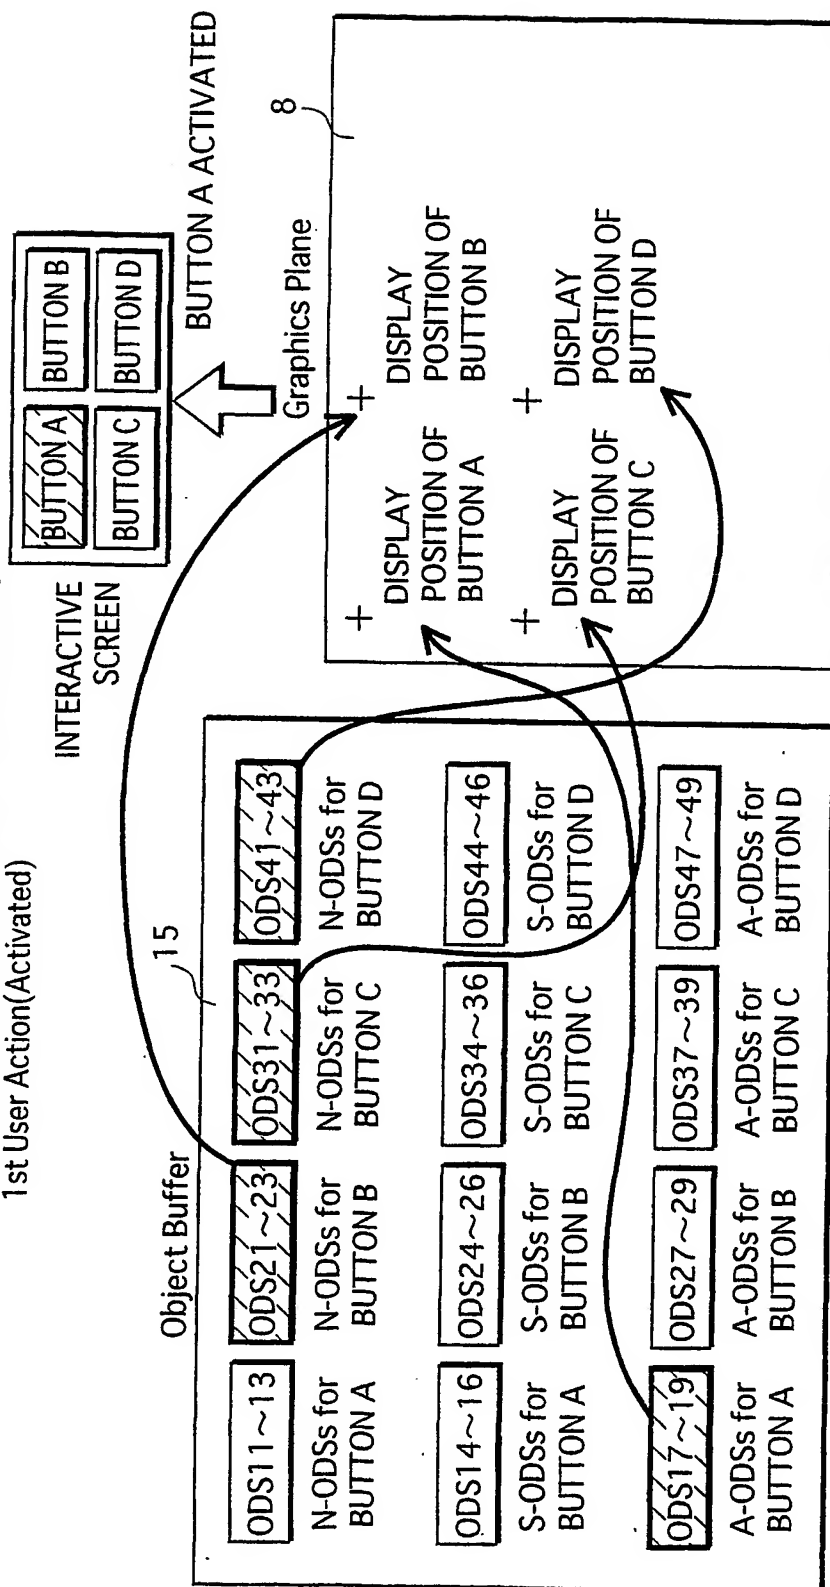


DISPLAY POSITION OF BUTTON=DISPLAY POSITION DEFINED
BY button_horizontal_position, button_vertical_position
OF BUTTON INFORMATION

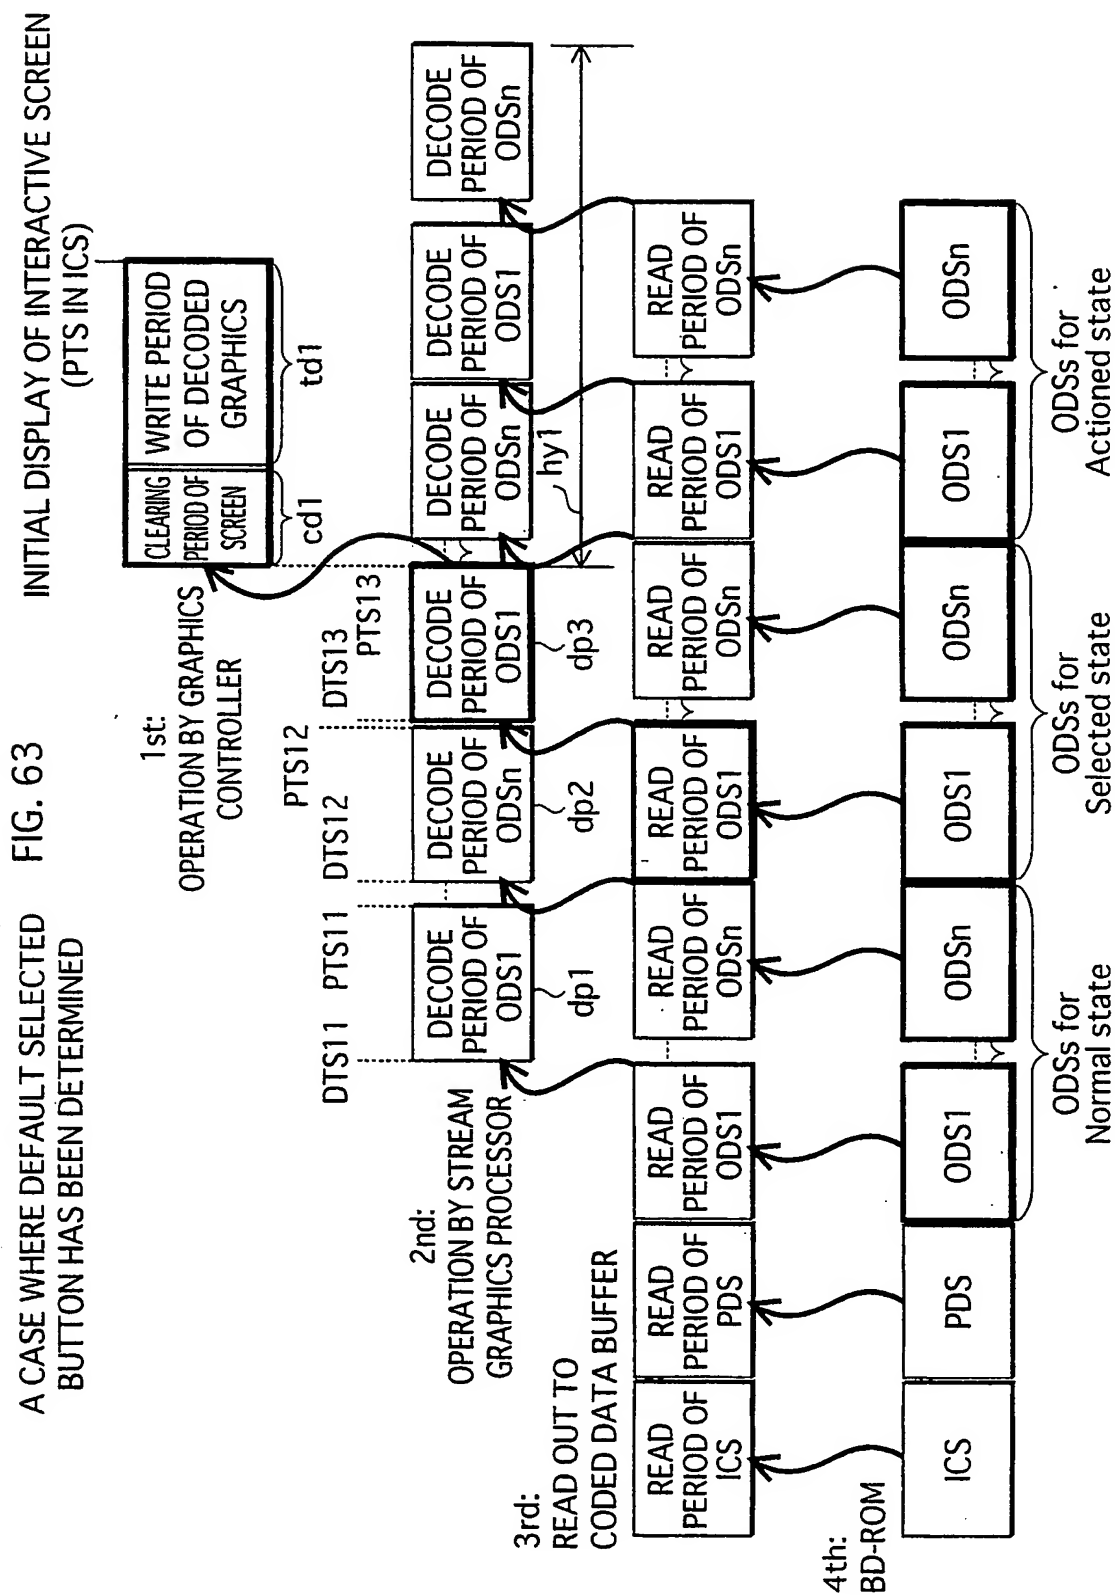

A CASE WHERE DEFAULT SELECTED
BUTTON HAS NOT BEEN DETERMINED

FIG. 64

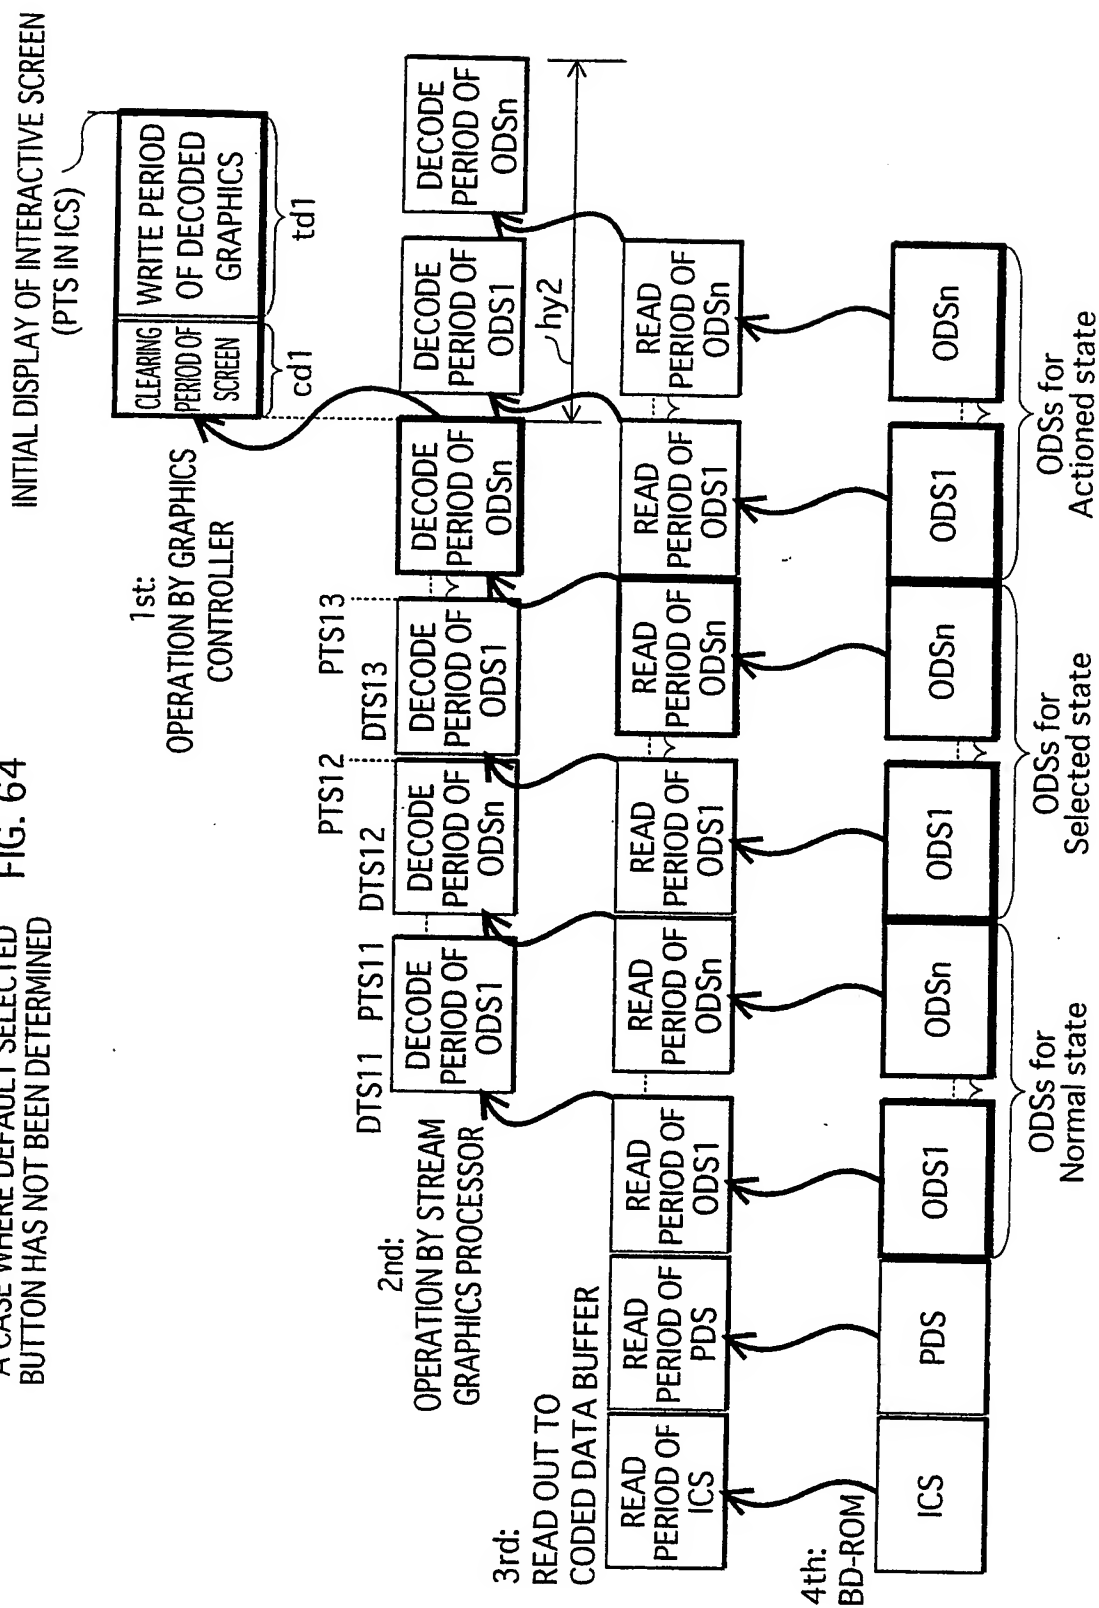

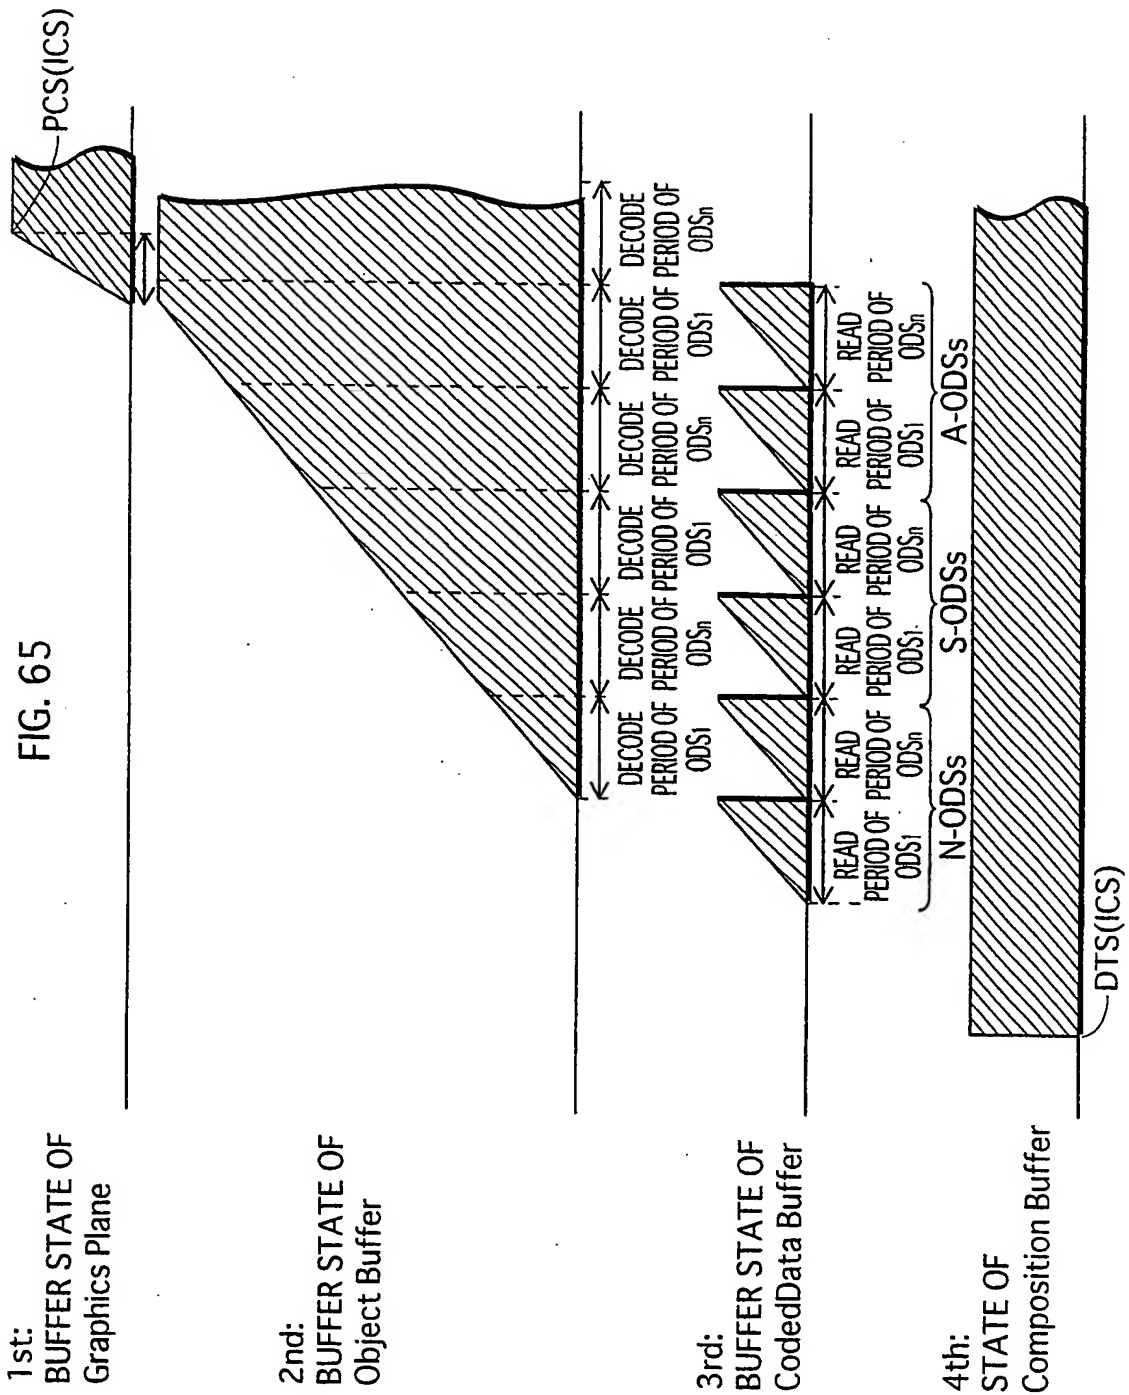


FIG. 66

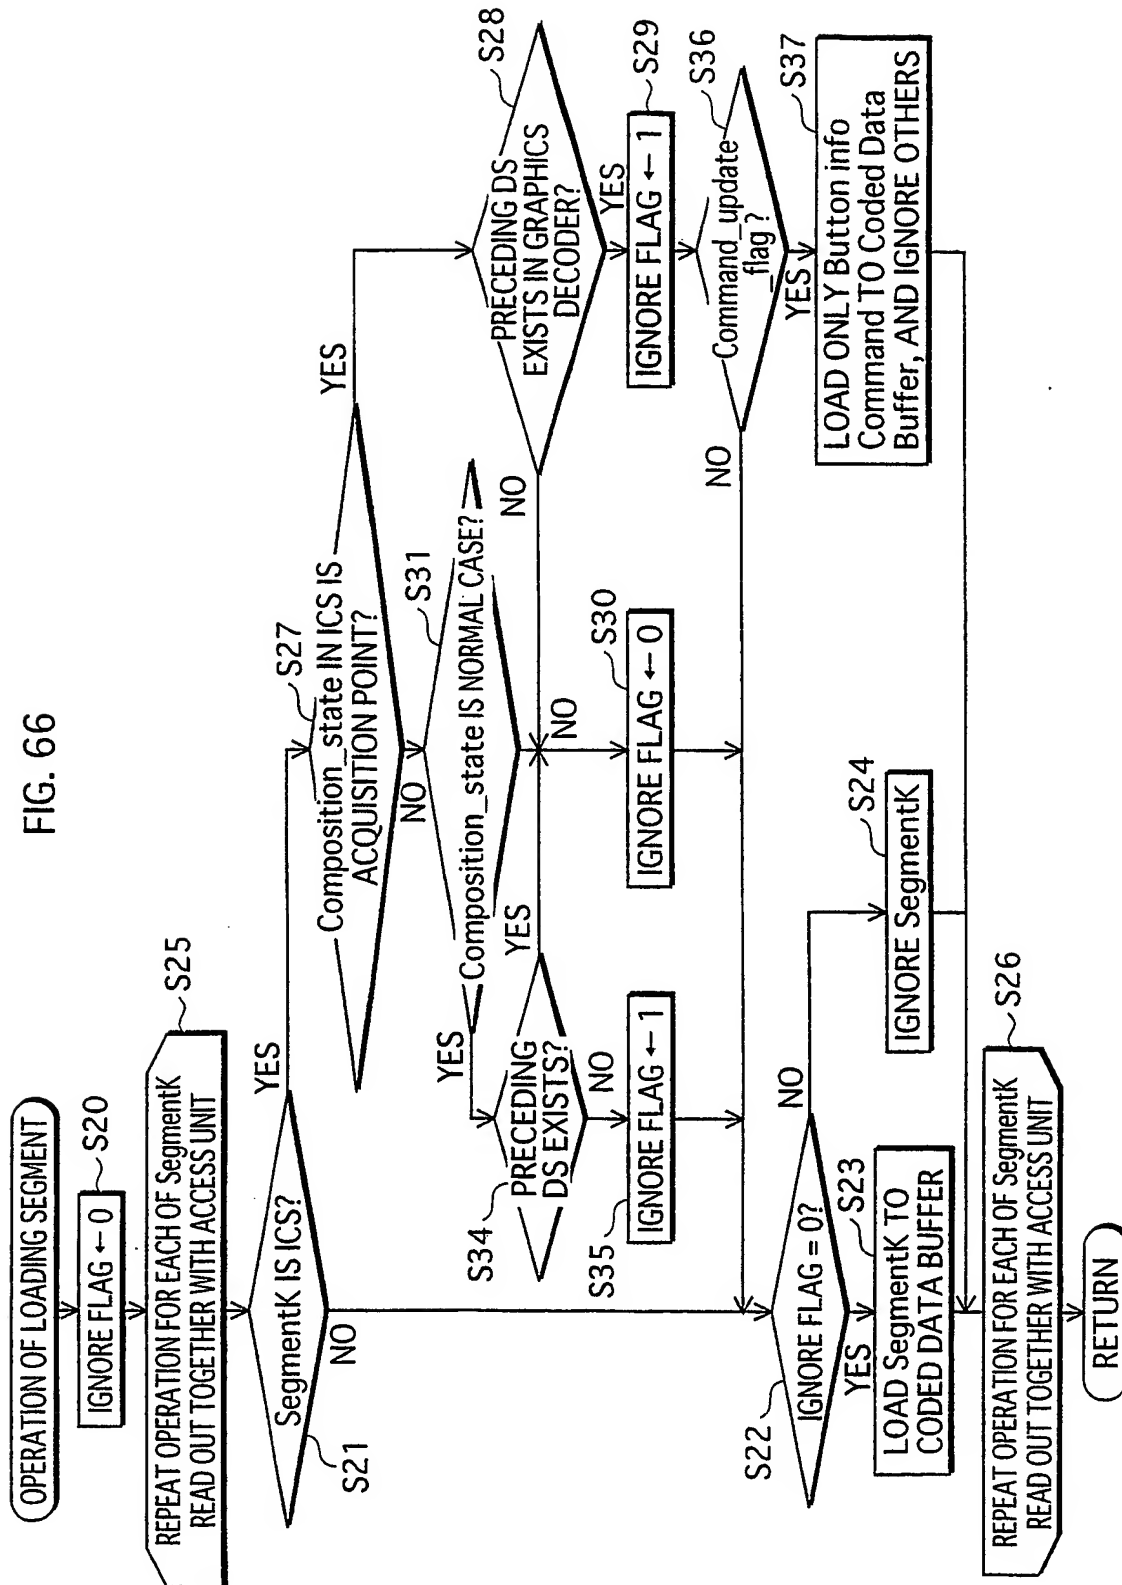


FIG. 67

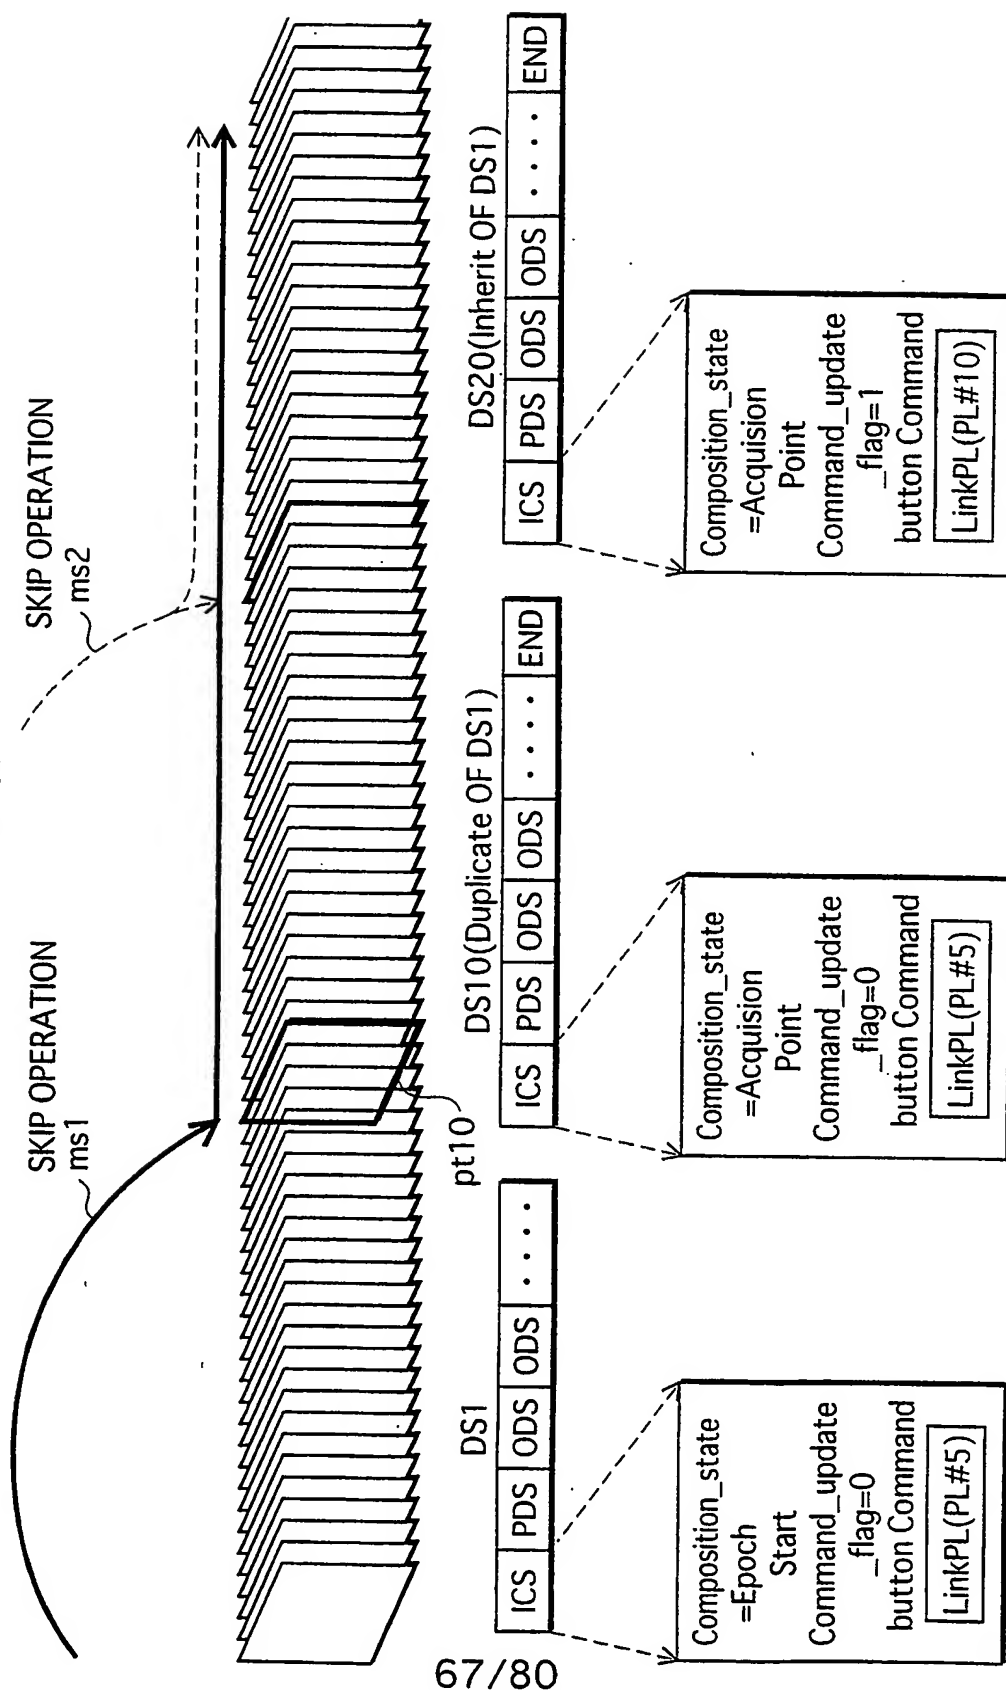


FIG. 68

Coded Data Buffer OF REPRODUCTION APPARATUS

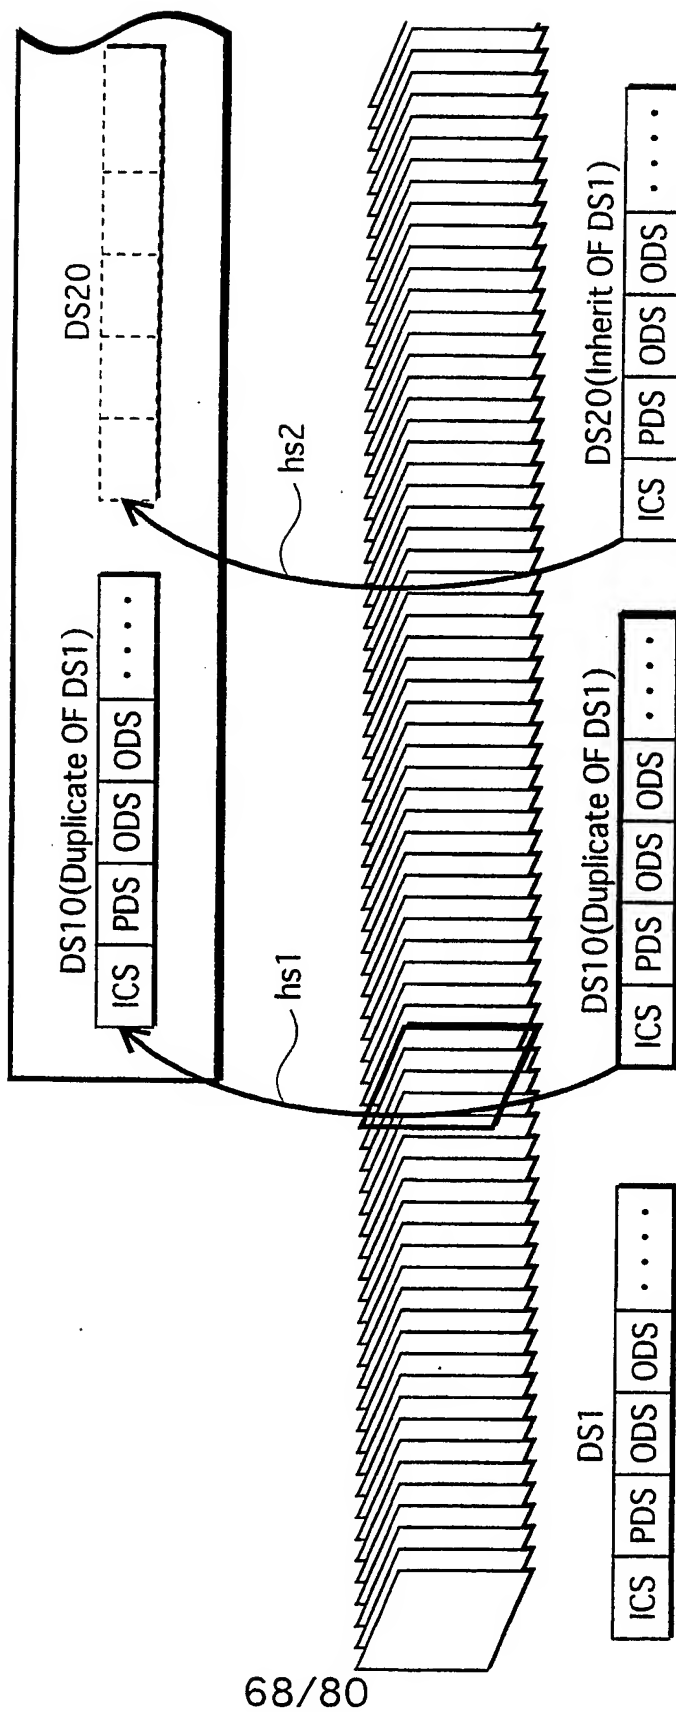


FIG. 69

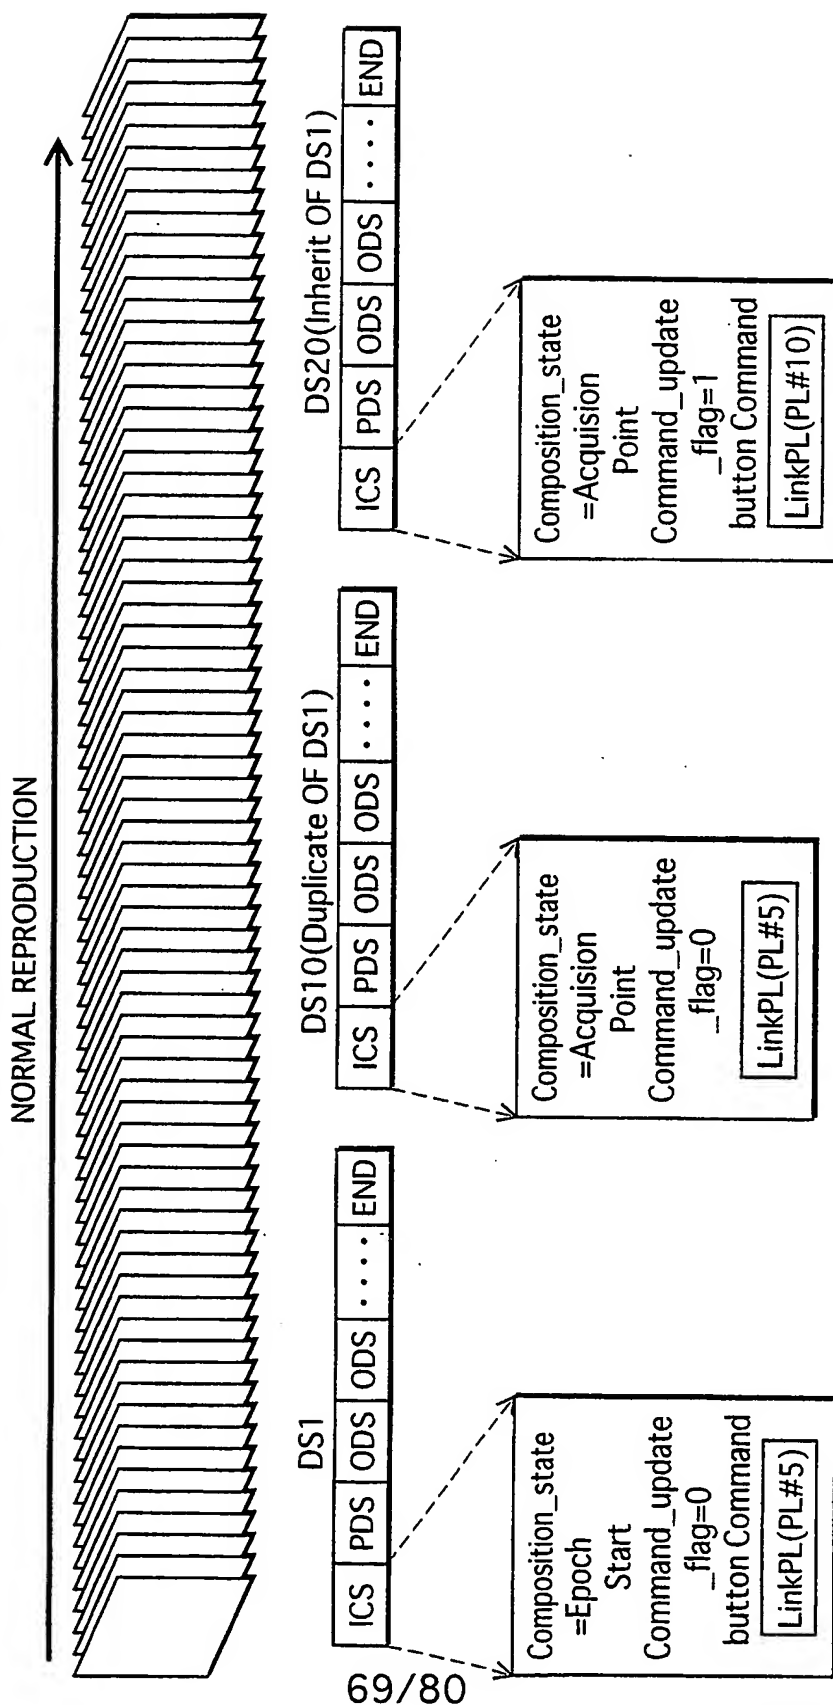


FIG. 70
Coded Data Buffer of Reproduction Apparatus

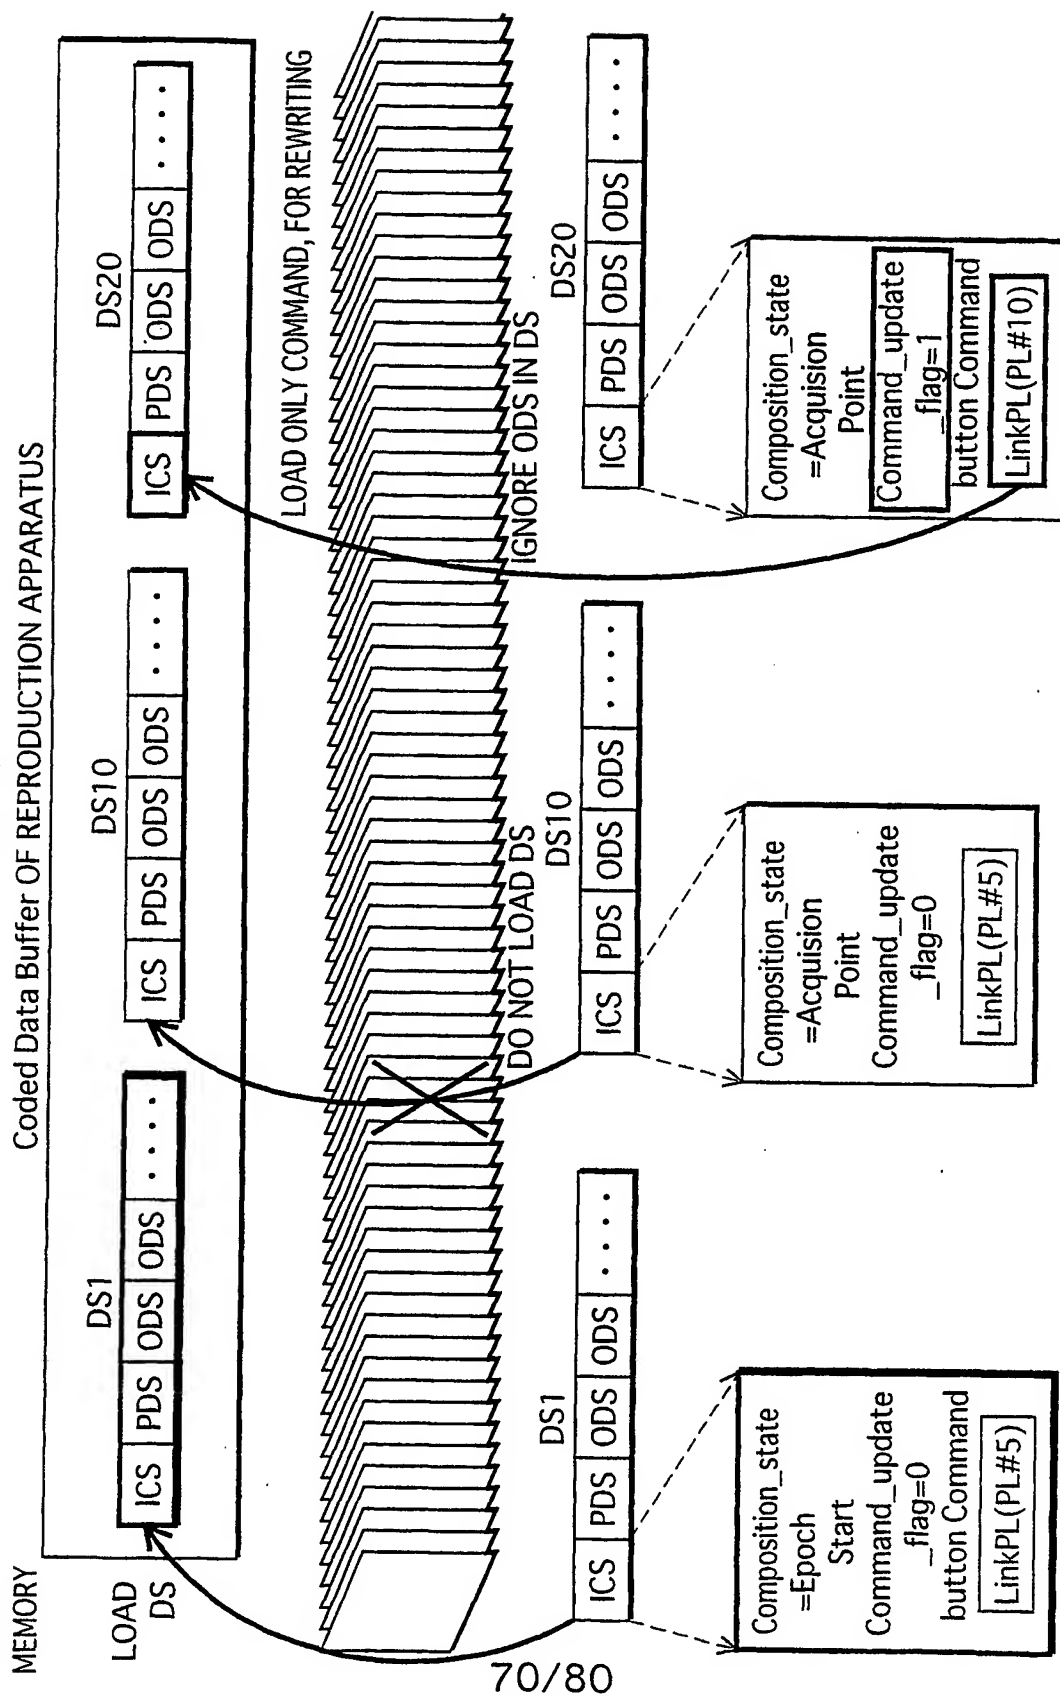


FIG.71


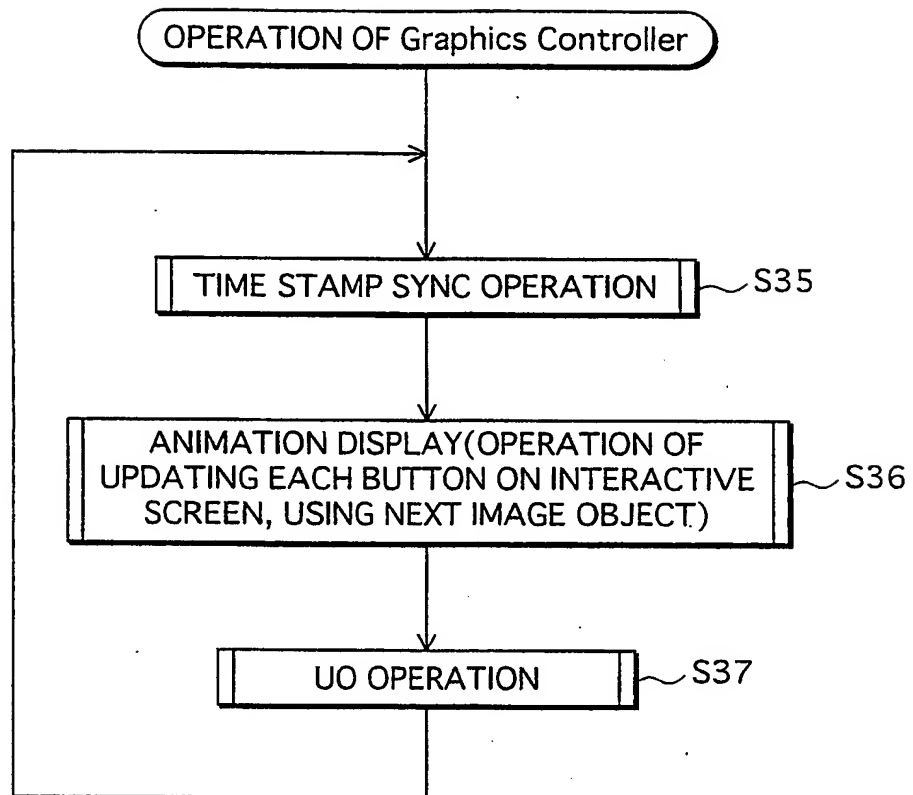


FIG.72

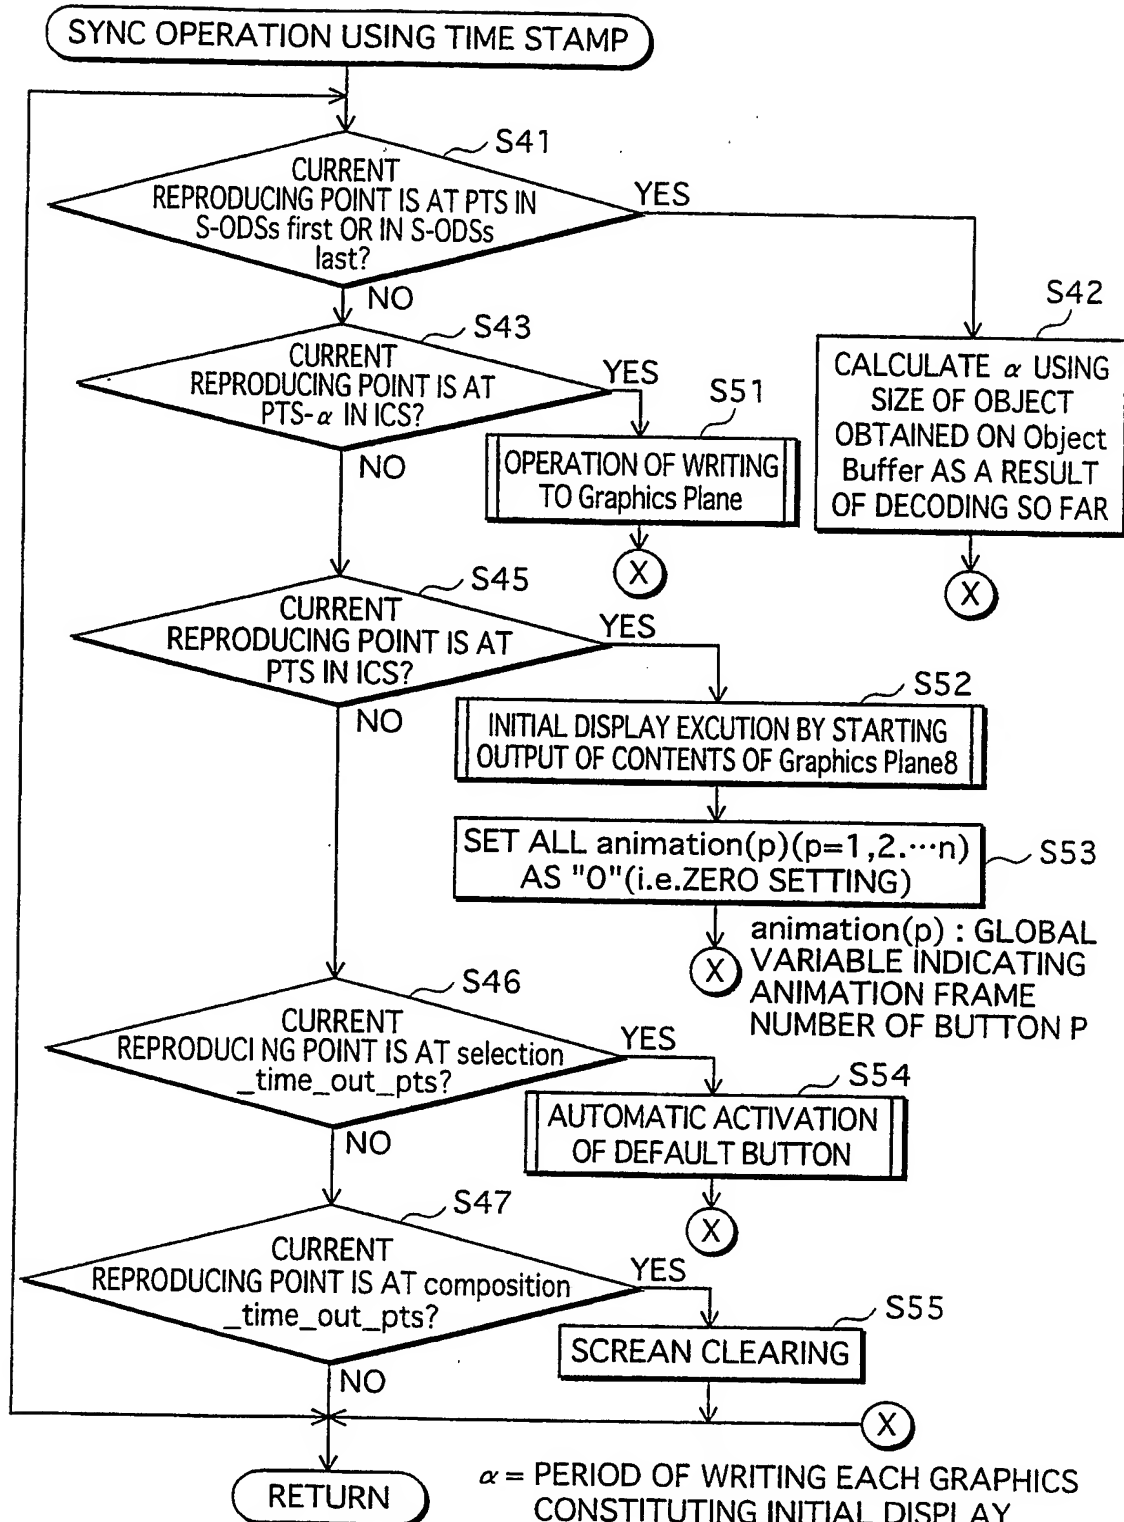

α = PERIOD OF WRITING EACH GRAPHICS
CONSTITUTING INITIAL DISPLAY,
TO GraphicsPlane+GraphicsPlane
CLEARING PERIOD

FIG. 73

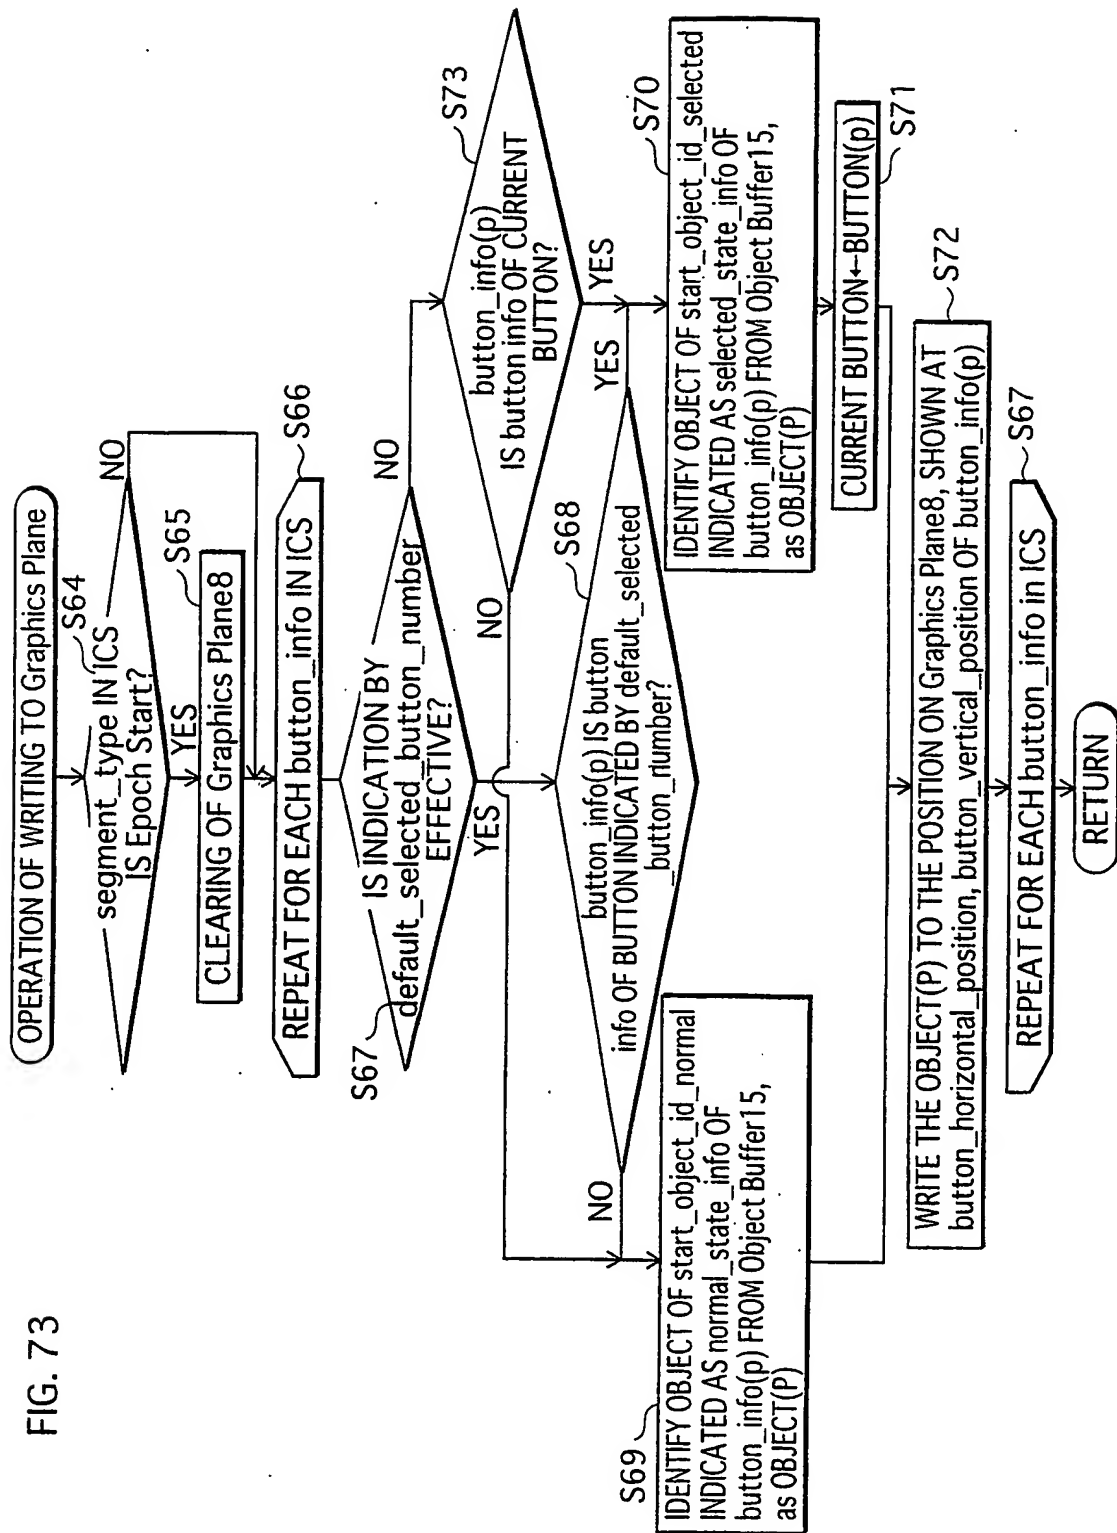


FIG.74

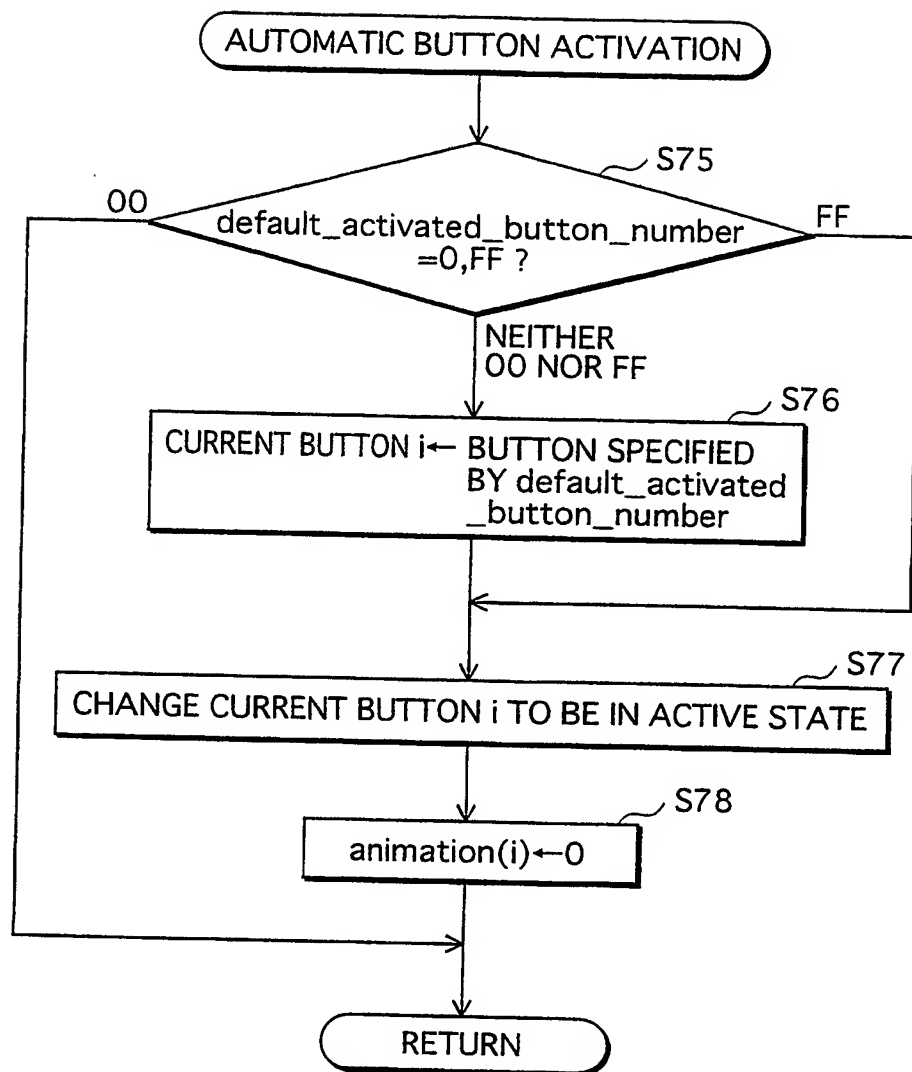
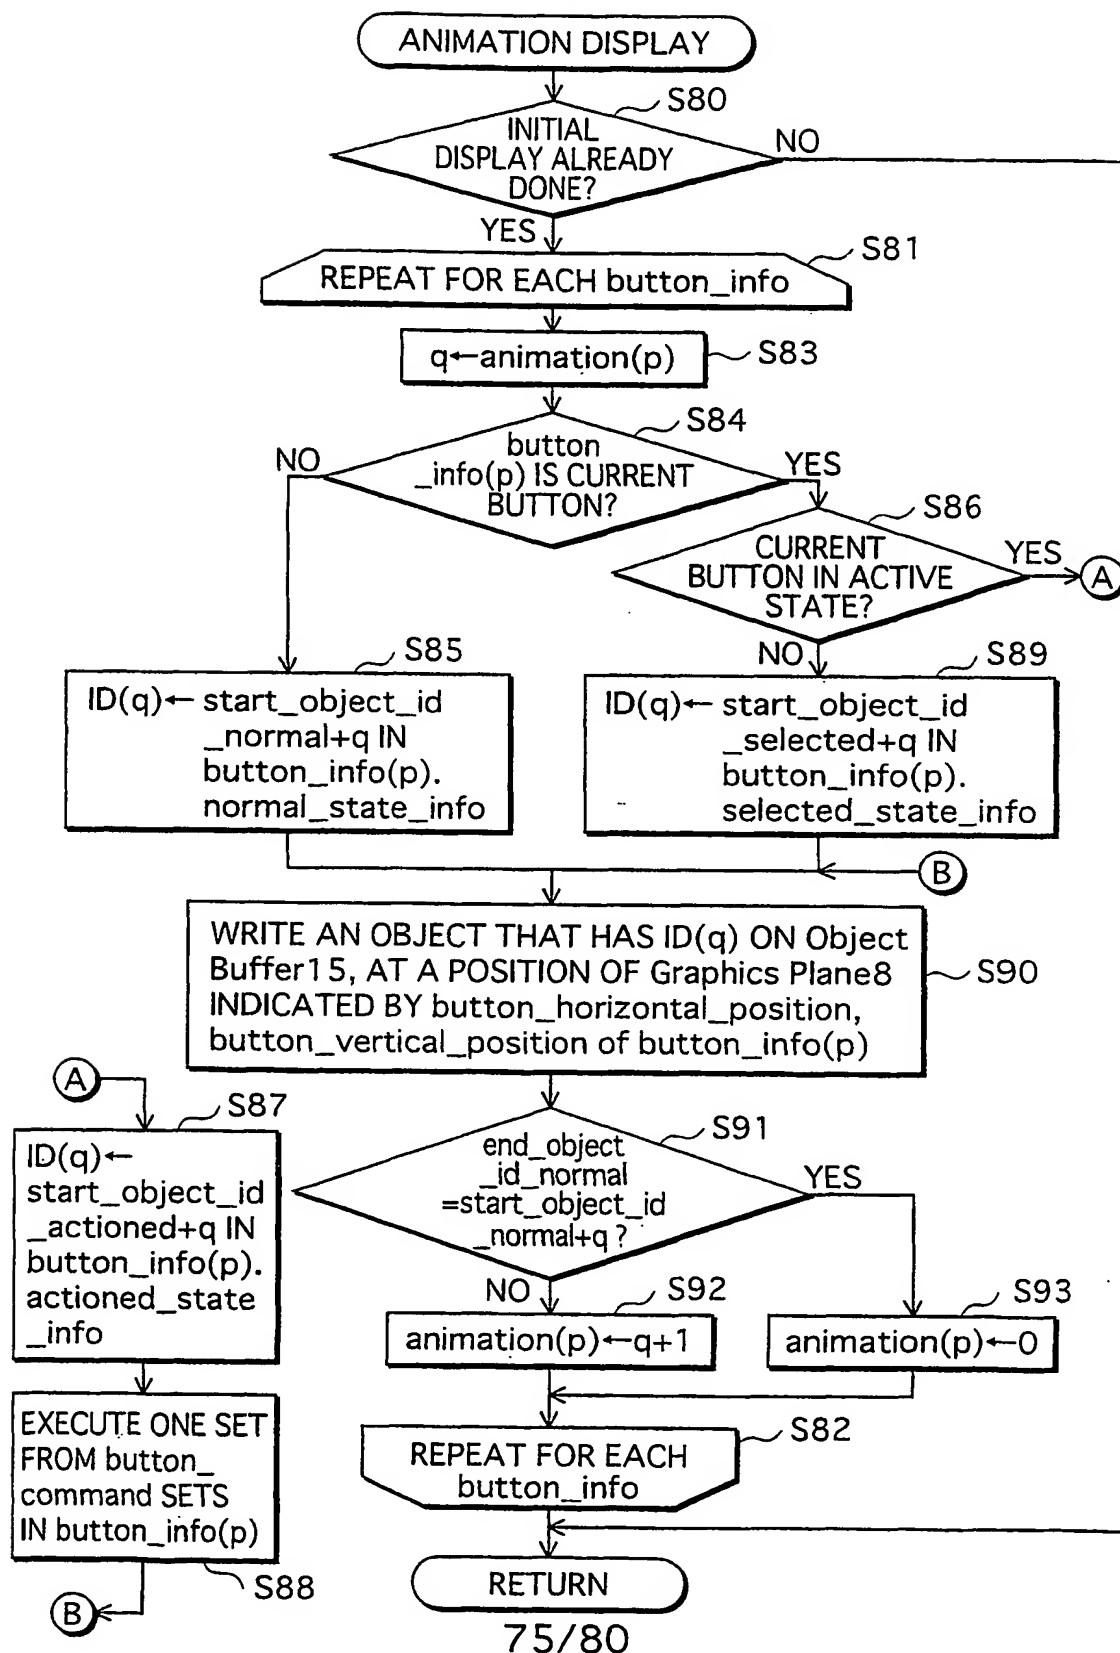


FIG.75







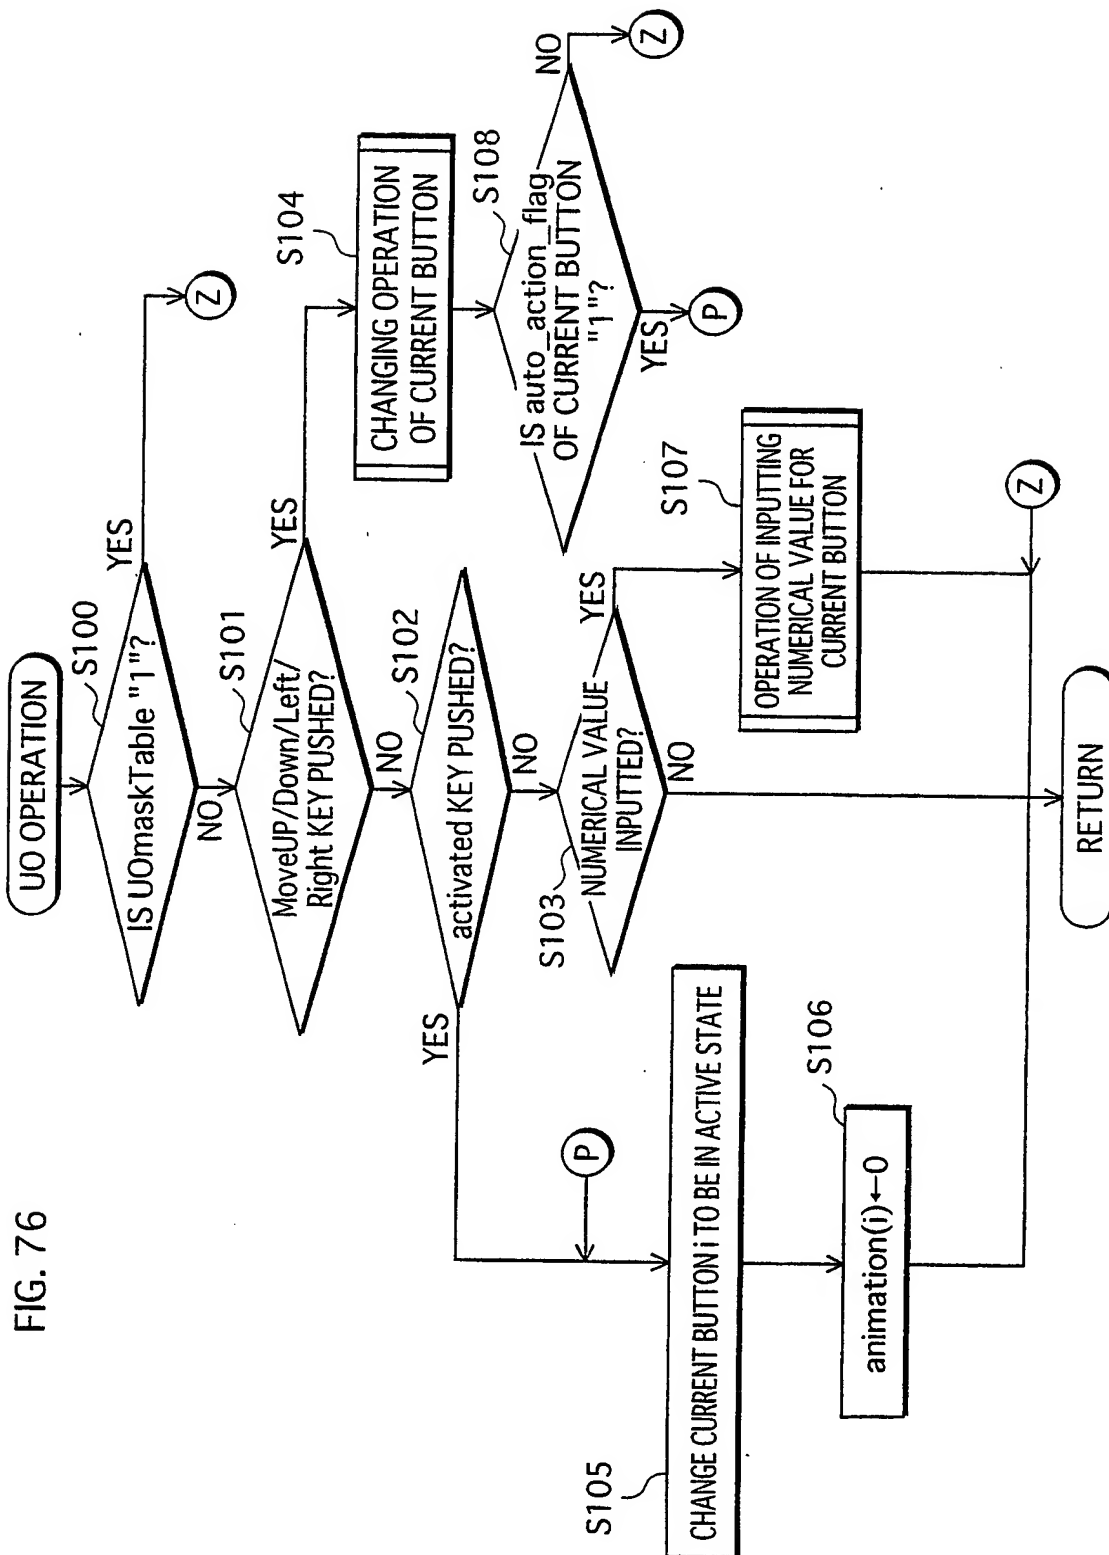


FIG.77

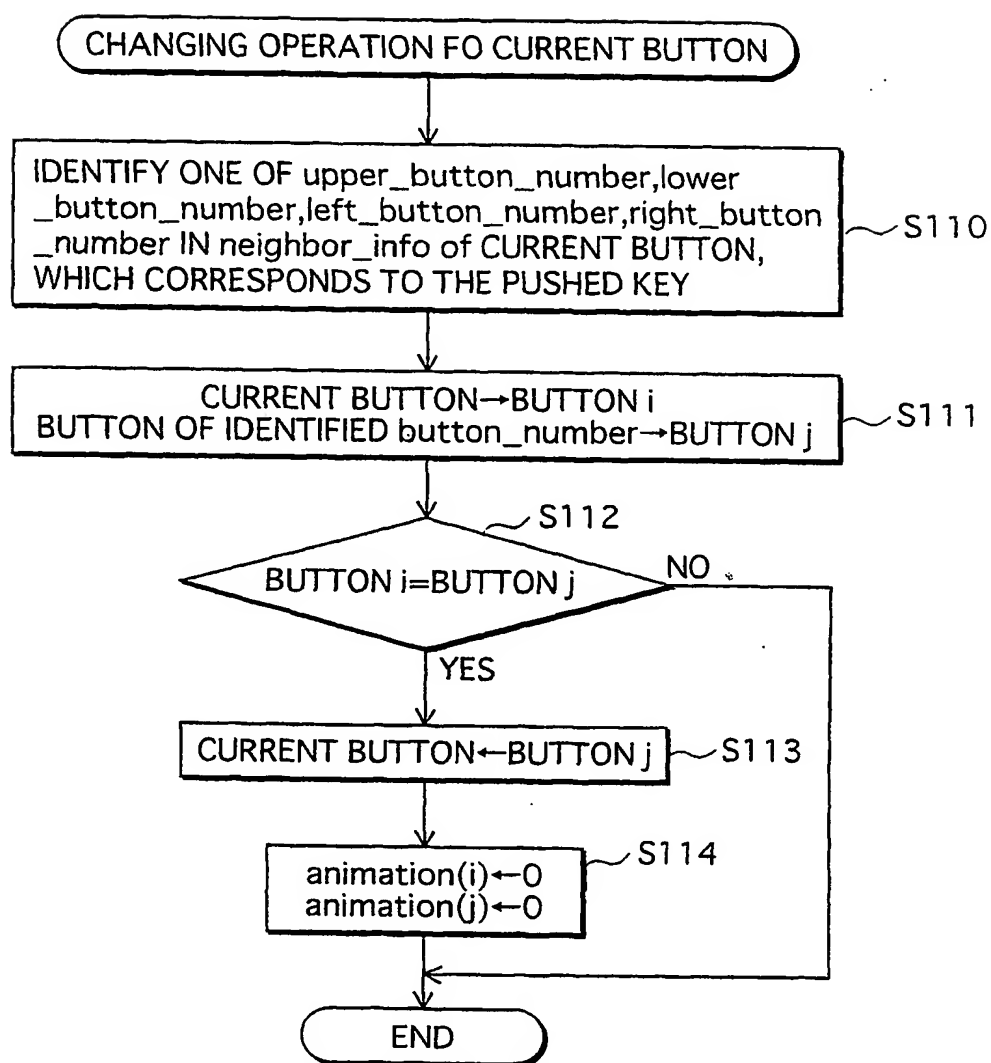

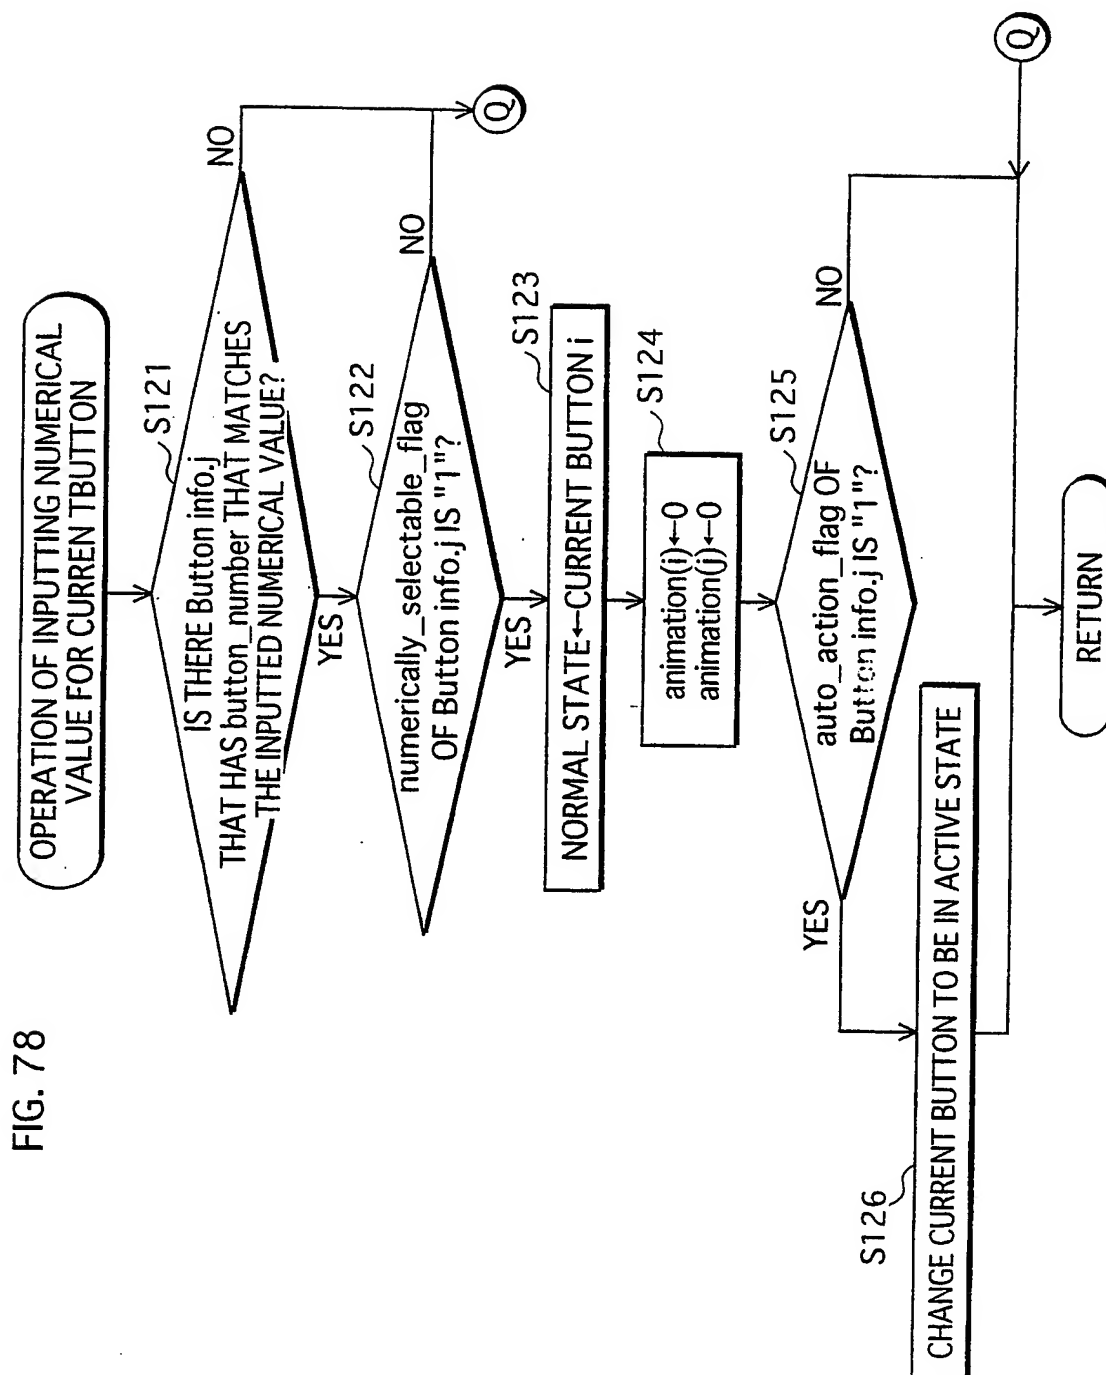

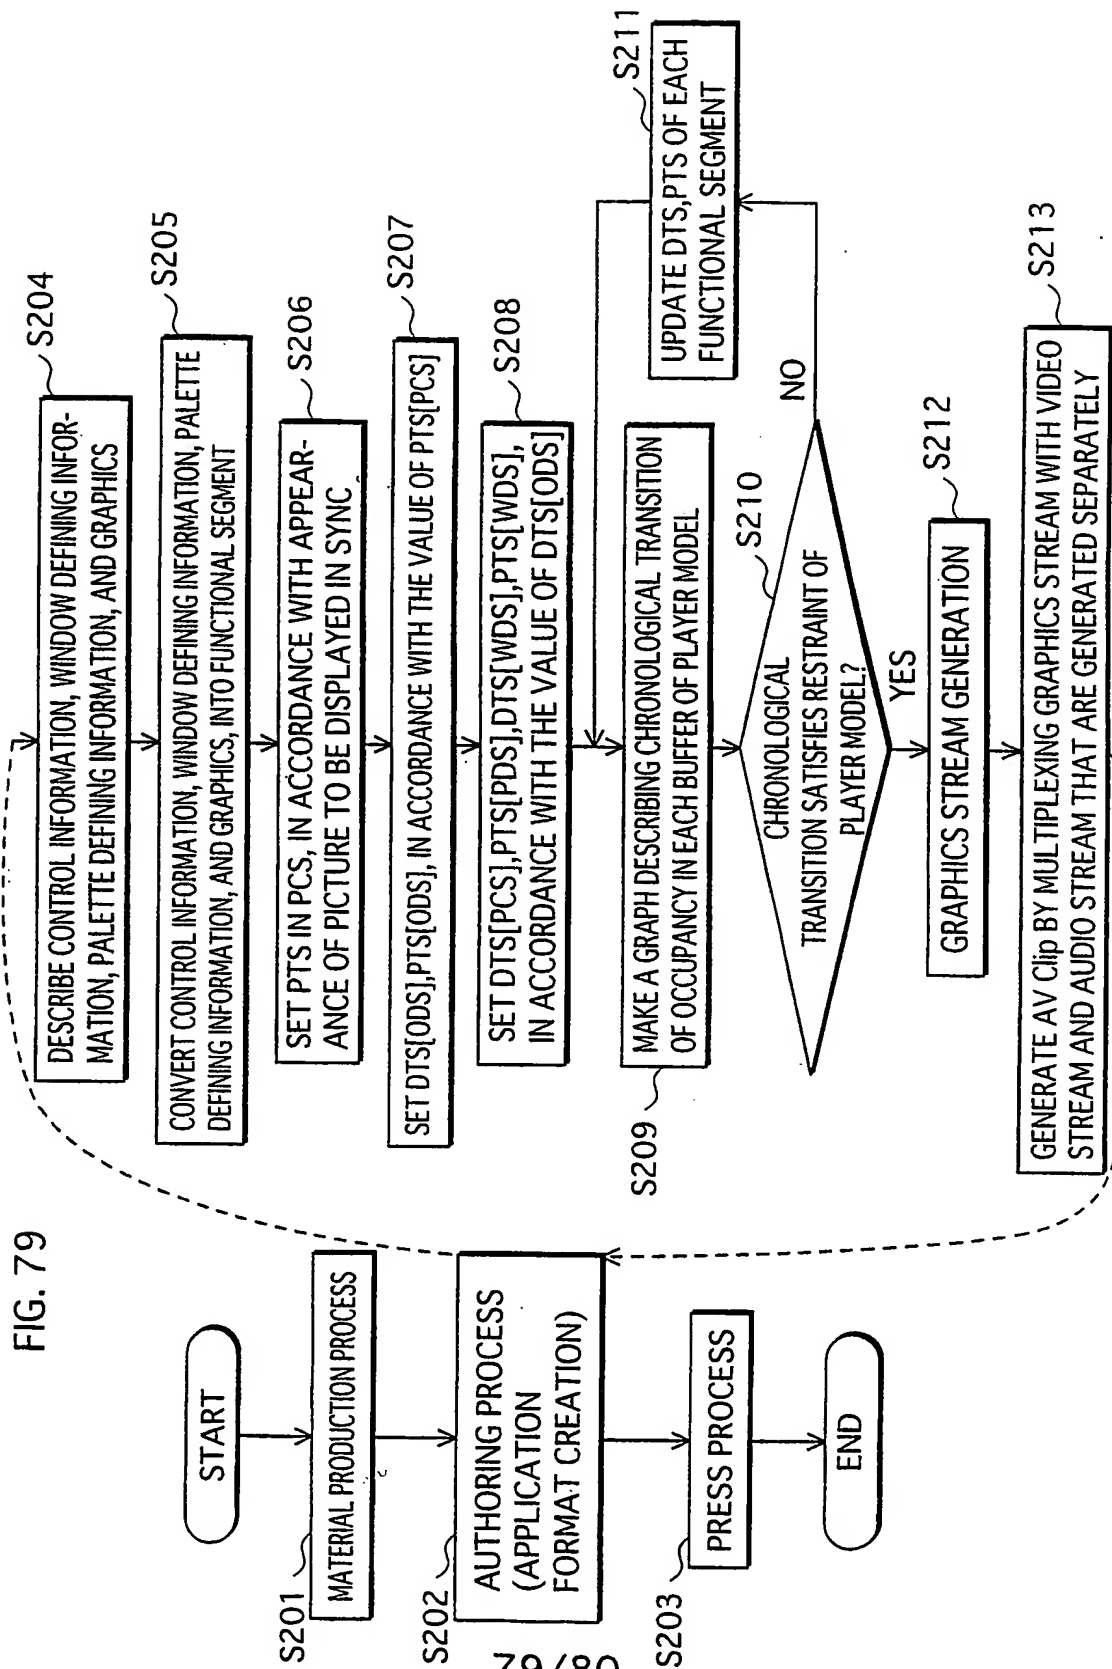

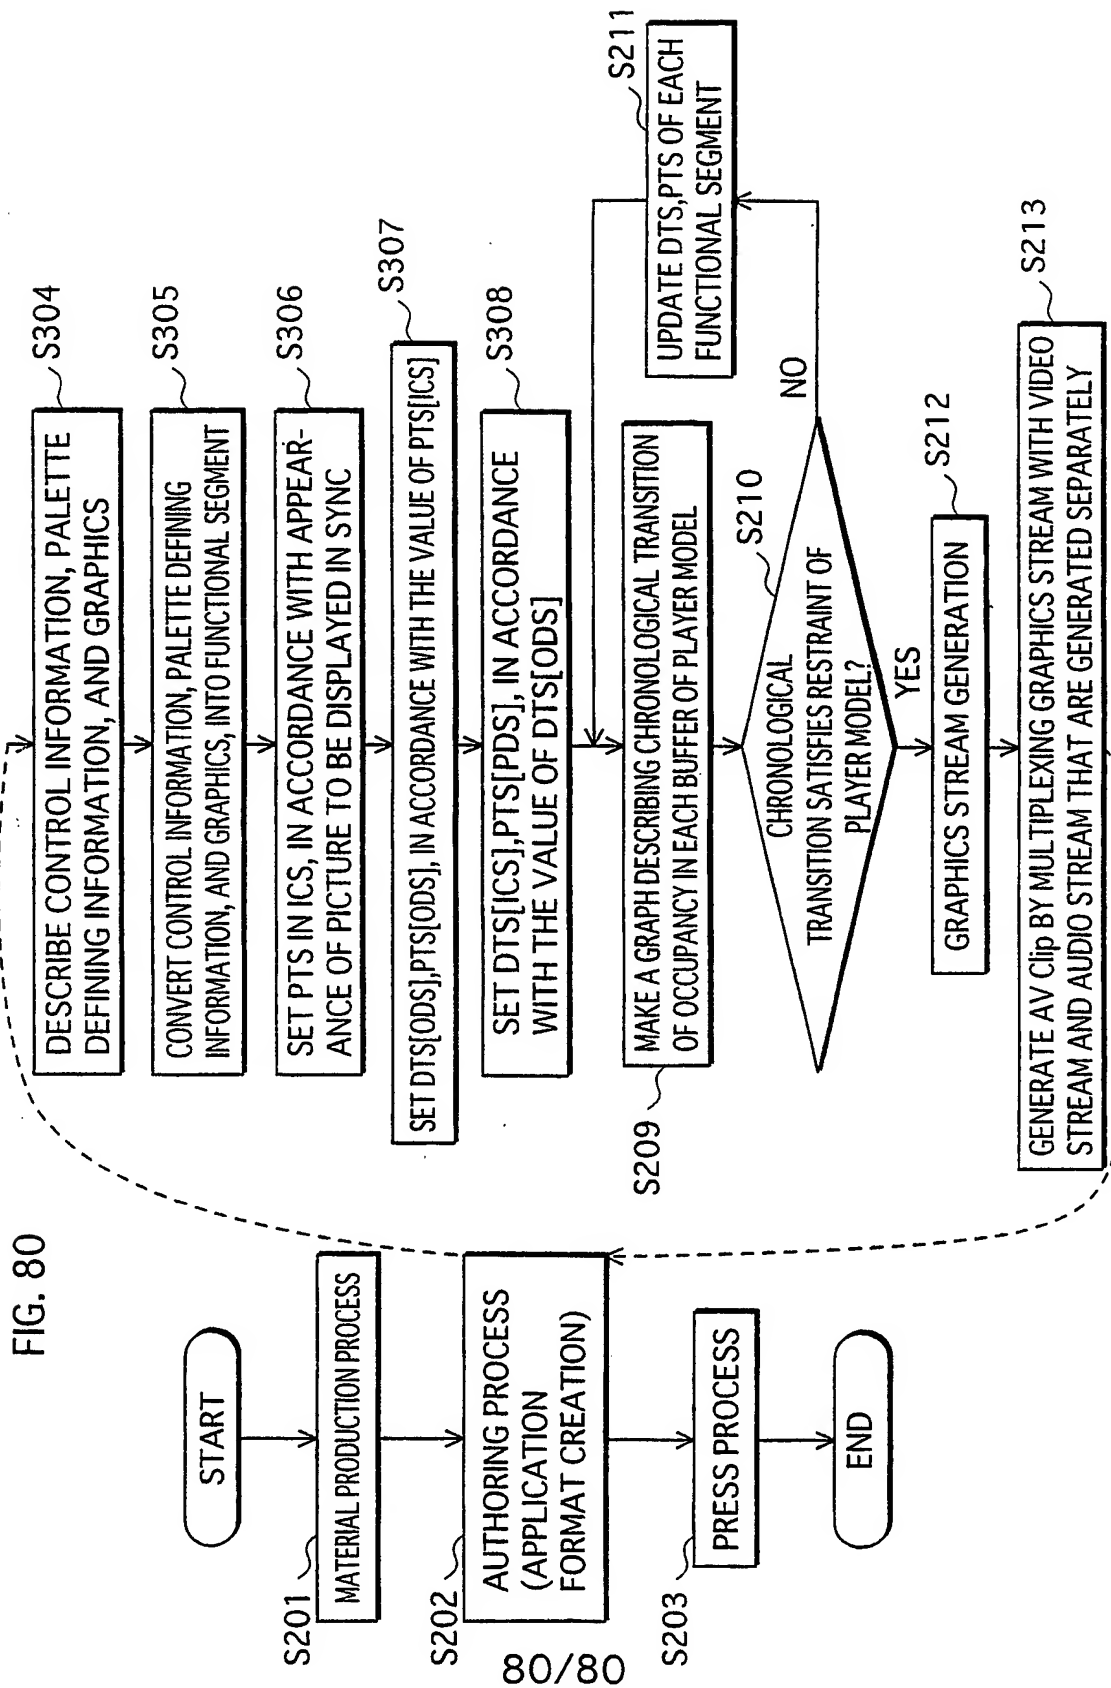

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP2004/009873

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N5/92

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 924 934 A (NIPPON ELECTRIC CO) 23 June 1999 (1999-06-23)</p> <p>paragraph '0004! - paragraph '0006! paragraph '0009! - paragraph '0010! paragraph '0025! - paragraph '0027! paragraph '0033! - paragraph '0034! paragraph '0039! - paragraph '0042! paragraph '0045! - paragraph '0051! paragraph '0063! - paragraph '0065! paragraph '0068! paragraph '0073! paragraph '0077! paragraph '0079! - paragraph '0080! paragraph '0084! - paragraph '0085! paragraph '0094! paragraph '0096! - paragraph '0100! paragraph '0116! - paragraph '0119! figures 1,3-5,7,18-21,28-37,53</p> <p style="text-align: center;">----- -/--</p>	<p>1, 15, 29-32</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 October 2004

Date of mailing of the international search report

15/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fragua, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP2004/009873

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/117529 A1 (DE HAAN) 26 June 2003 (2003-06-26) paragraph '0002! - paragraph '0015! paragraph '0028! - paragraph '0031! paragraph '0033! - paragraph '0036! figures 1-8 -----	1, 2, 15, 24, 29-32
A	EP 1 035 735 A (TOKYO SHIBAURA ELECTRIC CO) 13 September 2000 (2000-09-13) paragraph '0012! - paragraph '0014! paragraph '0017! - paragraph '0021! paragraph '0025! - paragraph '0027! paragraph '0033! - paragraph '0045! figures 1, 4, 6, 8 -----	1, 15, 29-32
A	AVARO O ET AL: "The MPEG-4 systems and description languages: A way ahead in audio visual information representation" SIGNAL PROCESSING. IMAGE COMMUNICATION, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 9, no. 4, 1 May 1997 (1997-05-01), pages 385-431, XP004075337 ISSN: 0923-5965 the whole document -----	1, 15, 29-32

Form PCT/ISA/210 (continuation of second sheet) (January 2004)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2004/009873

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 0924934	A	23-06-1999	JP	3407287 B2		19-05-2003
			JP	11187398 A		09-07-1999
			CA	2256230 A1		22-06-1999
			EP	0924934 A1		23-06-1999
			US	6584125 B1		24-06-2003
<hr/>						
US 2003117529	A1	26-06-2003	AT	213113 T		15-02-2002
			CA	2200335 A1		06-02-1997
			DE	69619091 D1		21-03-2002
			DE	69619091 T2		02-10-2002
			DK	787404 T3		13-05-2002
			EP	0787404 A2		06-08-1997
			ES	2172663 T3		01-10-2002
			WO	9704591 A2		06-02-1997
			JP	10507607 T		21-07-1998
			PT	787404 T		31-07-2002
<hr/>						
EP 1035735	A	13-09-2000	EP	1035735 A2		13-09-2000
			JP	2001148853 A		29-05-2001
<hr/>						

Form PCT/ISA/210 (patent family annex) (January 2004)

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)